

20 November 2025

ASX Market Announcements

**LABORATORY ASSAY RESULTS RECEIVED FOR TOTAL RARE EARTH ELEMENTS
JABUK PROSPECT, EL 6795 PARRAKIE, LIMESTONE COAST, SOUTH AUSTRALIA**

Ausmon Resources Limited ("Company") is pleased to announce the laboratory results for the samples from the September 2025 Aircore Drilling program at the Jabuk Prospect (**Figure 1**).

After an initial pXRF reading of all the samples from each metre of the 418 m drilling from a total of 23 vertical drill holes, a total of 24 samples with elevated REEs reading within the range of 130 ppm to 753 ppm were submitted to ALS in Adelaide for Total Rare Earths Elements ("TREO") analyses via method ME-MS81. The initial pXRF reading is a partial analysis of 5 of the 14 REEs.

The Significant Assays – ppm TREO* are as follows:

25PKAC004 16-18m 2m @ 689.04ppm (incl 16-17 1m @ 763.87ppm)
25PKAC005 15-16m 1m @ 895.95ppm
25PKAC006 11-12m 1m @ 1038.88ppm
25PKAC007 12-13m 1m @ 1,452.73ppm
25PKAC008 5-6m 1m @ 856.89ppm
25PKAC018 14-17m 3m @ 379.58ppm (incl 16-17 1m @ 764.22ppm)
25PKAC20 17-20m 3m @ 485.24ppm (incl 18-19m 1m @ 658.55ppm)
25PKAC021 15-18m 3m @ 429ppm (incl 16-17m 1m @ 578.65ppm)

*

*TREO – elements converted to oxides with oxides conversions in brackets Ce(1.1713), Dy(1.1477), Er(1.1435), Eu(1.1579), Gd(1.1526), Ho(1.1455), La(1.1728), Lu(1.1371), Pr(1.2082), Nd(1.1664), Sc(1.5338), Sm(1.1596), Tb(1.1510), Y(1.2699) and Yb(1.1387)

These results are most encouraging for future drilling programs.

The Company has identified a 10 km² area (Southern Mallee and Coorong District Councils) in the centre of the Jabuk Prospect within which the Company plans to proceed with a grid based vertical aircore drilling for a 250 m x 400 m grid to a maximum depth of 20 m.

Chief Technical Officer said: “Initial drilling results from the Jabuk Prospect are highly encouraging as shown in **Figure 1** with the next phase being grid based shallow Aircore drilling across the centre of Jabuk to build up our knowledge of the distribution of the REE mineralisation. The Company has two additional nearby prospects at Geranium and Beelitz (**Figure 3**) with promising signs. The 3 prospects cover a substantial total area of 122 km² to target for development.”

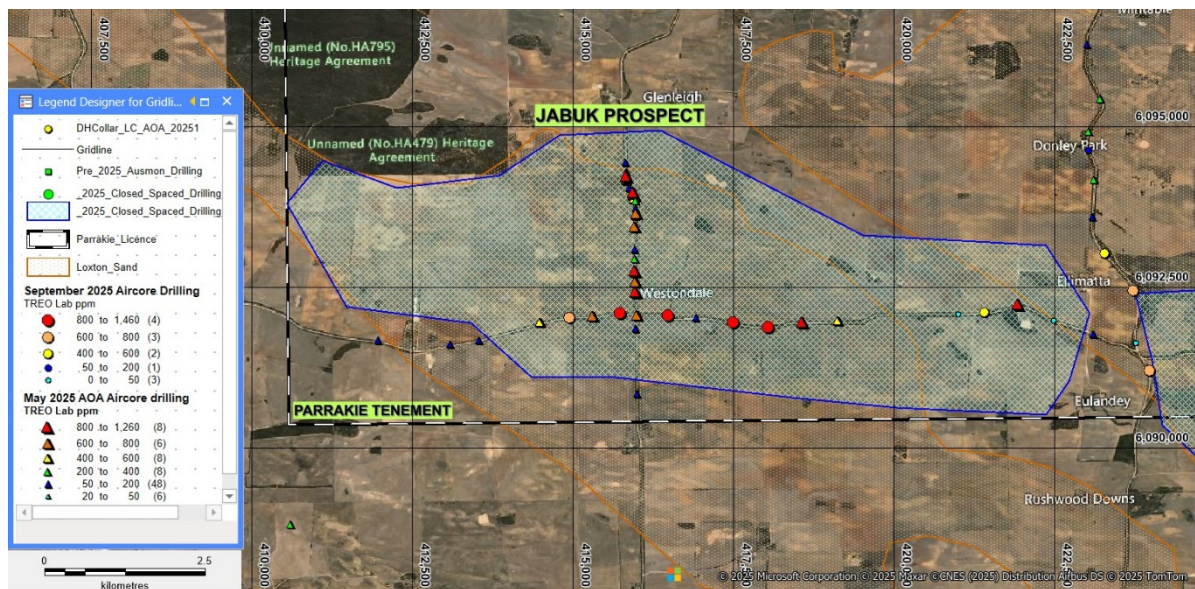


Figure 1: Jabuk May and September Aircore Results – Maximum TREO in hole

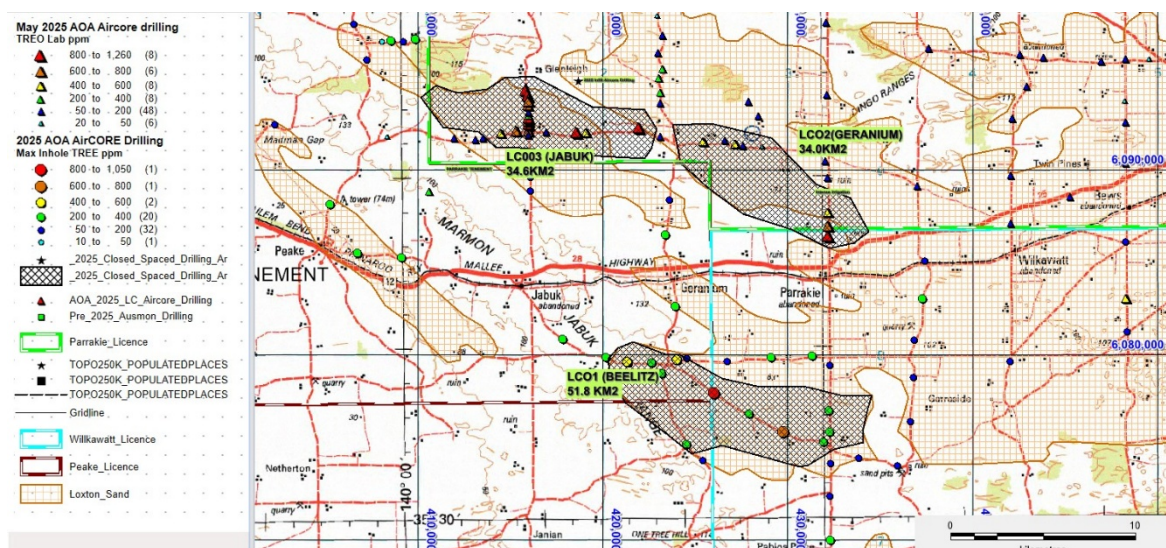


Figure 2: Maximum ppm TREO in the 2025 and 2024 aircore drilling programs that targeted the potentially REE mineralised Loxton Parilla Sands (brown)

These 3 prospects within the tenements EL 6795 Parrakie, EL 6975 Wilkawatt and EL 7015 Peake form part of the Company's Limestone Coast Project (**Figure 3**) which covers a total area of 2,523.7 km² in the Murray Basin that host Loxton/Parilla sands prospective for REEs. Australian Rare Earths (ASX:AR3), exploring to the south of these tenements has reported significant exploration success at their Koppamurra REEs Project with estimated JORC 2012 resource of 236Mt @ 748 ppm Total Rare Earth Oxides ("TREO") (AR3 ASX Release on 30 September 2024).

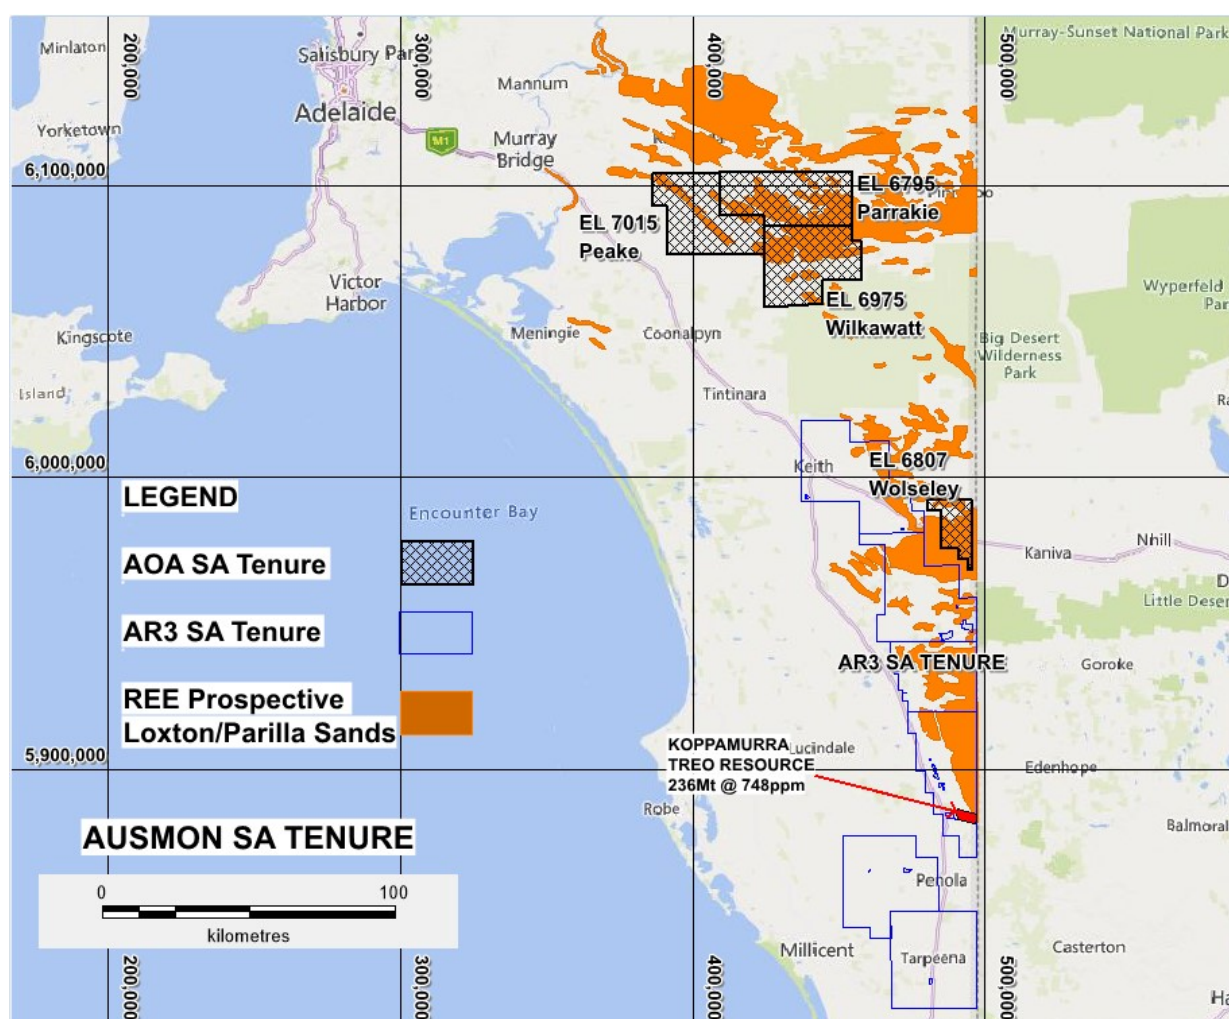


Figure 3: Limestone Coast REEs Project Exploration Tenements

The results of the May and September 2025 drilling programs (see AOA ASX releases on 30 July 2025 and 8 October 2025) combined with the results of the two 2024 drilling programs (see AOA ASX releases on 29 July 2024 and 21 March 2024) provide high encouragement on the tenements under exploration. The identified trend of mineralisation covers significant acreage for further drilling see shaded areas LC01, LC02 and LC03 (**Figure 2**) where 3 prospects namely Beelitz, Geranium and Jabuk have been identified respectively.

The next phase of Aircore drilling having regards to the assay results will extend to freehold land that will require access agreements and community consultations.

Table 1 Parrakie Drill Collars

Project	TenementName	TenementNo	HoleID	Prospect	DrillType	TotalDepth	Easting	Northing	RL	Grid	SurveyedDate	DrillContractor	Rahabilitated	Dip	Azim	Mag
LimestoneCoast	Parrakie	EL6795	25PKAC004	Jabuk	Aircore	18	414960.62	6092012.5	110	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC005	Jabuk	Aircore	18	415746.62	6092084.5	109	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC006	Jabuk	Aircore	18	416495.62	6092043.5	108	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC007	Jabuk	Aircore	18	417501.62	6091941.5	106	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC008	Jabuk	Aircore	18	418047.62	6091868.5	106	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC012	Jabuk	Aircore	18	421008.62	6092070.5	104	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC013	Jabuk	Aircore	20	421412.62	6092096.5	108	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC014	Jabuk	Aircore	18	422494.62	6091974.5	109	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC018	Geranium	Aircore	18	423985.62	6091193.5	112	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC020	Geranium	Aircore	20	423739.62	6092430.5	105	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC021	Geranium	Aircore	18	423294.62	6093008.5	105	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC022	Geranium	Aircore	18	423114.62	6093994.5	105	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0
LimestoneCoast	Parrakie	EL6795	25PKAC023	Geranium	Aircore	18	423038.62	6094623.5	105	MGA2020_54	7/09/2025 0:00	GPS	Yes	-90		0

Next Exploration Phase Plan:

- Contact landholders and run community meetings in support of proposed drilling in Q4 2025/Q1 2026
- Finalise drill collars on the 10 km² grid drill area and prepare budget and funding for drilling.
- Engage drillers and service providers for the drilling operation.

Competent Person Statement

The information in the report above that relates to Exploration Results, Exploration Targets and Mineral Resources is based on information compiled by Mr Mark Derriman, who is the Company's Consultant Geologist and a member of The Australian Institute of Geoscientists (1566). Mr Mark Derriman has sufficient experience that is relevant to the style of mineralization and type of deposit under consideration and to the activities which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Exploration Targets, Mineral Resources and Ore Reserves. Mr Mark Derriman consents to the inclusion in this report of matters based on his information in the form and context in which it appears.

Forward-Looking Statement

This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning planned exploration program and other statements that are not historical facts. When used in this document, the words such as “could”, “plan”, “estimate”, “expect”, “intend”, “may”, “potential”, “should” and similar expressions are forward-looking statements. Although Ausmon Resources Limited believes that its expectations reflected in these forward-looking statements are reasonable, such statements involve risks and uncertainties and no assurance can be given that actual results will be consistent with these forward-looking statements.

Authorised by:

The Board of Directors

Contact:

Eric Sam Yue

Executive Director/Secretary

T: 02 9264 6988

E: office@ausmonresources.com.au

JORC Code, 2012 Edition – Table 1 Parrakie (EL 6795) Lab Drilling Results Received

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> 3kg samples were collected in prenumbered calico bags for every meter. The drilling was completed on the 15th September 2025 A hand-held Garmin GPS unit was used to record the drill collars as MGA 2020 Zone 54 OREAS standard 465 and a blank were inserted into the sample sequence every 30th sample. Duplicate samples were also collected every 50th sample
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Twenty three (23) vertical aircore holes were completed for 418 m. Drilled by GPS Drilling Drilling along district council verges Holes were not oriented
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> A 3kg split was collected for every meter in a pre-numbered calico bag, the remainder of the meter interval was put back down the hole as part of the rehabilitation. There was little contamination, and the holes were dry The visual estimation was that the recovery was very good. Every effort was made by the drillers to maximise recovery. A representative sample of every meter was collected in pre numbered plastic chip trays All chip trays and rehabilitation were photographed

Criteria	JORC Code explanation	Commentary																																
Logging	<ul style="list-style-type: none">Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.The total length and percentage of the relevant intersections logged.	<ul style="list-style-type: none">The drill holes were logged by an experienced geological contractor employed by Perth Based Consultancy Speccy Science(SS)The detail of the logging is appropriate for the early stage of exploration.Every meter was logged individually																																
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none">If core, whether cut or sawn and whether quarter, half or all core taken.If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.For all sample types, the nature, quality and appropriateness of the sample preparation technique.Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.Whether sample sizes are appropriate to the grain size of the material being sampled.	<ul style="list-style-type: none">All of the sample was collected and placed in prenumbered calico bags.The meter samples were scanned initially by Euro Technical Services in Adelaide with their Evident Vanta pXRF.This is appropriate for the early level of exploration and appropriate for the material being sampled.24 samples were selected to be sent to ALS in Adelaide as a representative of an “elevated” population.																																
Quality of assay data and laboratory tests	<ul style="list-style-type: none">The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	<p>ALS Elements Sampled by Method ME-MS81</p> <p>The following elements were analysed.</p> <table><tr><td>Ba</td><td>Ce</td><td>Cr</td><td>Cs</td></tr><tr><td>Dy</td><td>Er</td><td>Eu</td><td>Ga</td></tr><tr><td>Gd</td><td>Hf</td><td>Ho</td><td>La</td></tr><tr><td>Lu</td><td>Nb</td><td>Nd</td><td>Pr</td></tr><tr><td>Rb</td><td>Sc</td><td>Sm</td><td>Sn</td></tr><tr><td>Sr</td><td>Ta</td><td>Tb</td><td>Th</td></tr><tr><td>Ti</td><td>Tm</td><td>U</td><td>V</td></tr><tr><td>W</td><td>Y</td><td>Yb</td><td>Zr</td></tr></table> <p>All results are in ppm apart from Ti which is in % (These results are included in the report).</p>	Ba	Ce	Cr	Cs	Dy	Er	Eu	Ga	Gd	Hf	Ho	La	Lu	Nb	Nd	Pr	Rb	Sc	Sm	Sn	Sr	Ta	Tb	Th	Ti	Tm	U	V	W	Y	Yb	Zr
Ba	Ce	Cr	Cs																															
Dy	Er	Eu	Ga																															
Gd	Hf	Ho	La																															
Lu	Nb	Nd	Pr																															
Rb	Sc	Sm	Sn																															
Sr	Ta	Tb	Th																															
Ti	Tm	U	V																															
W	Y	Yb	Zr																															
Verification of sampling and assaying	<ul style="list-style-type: none">The verification of significant intersections by either independent or alternative company personnel.The use of twinned holes.Documentation of primary data, data entry procedures, data	<ul style="list-style-type: none">Sample sites were chosen by the Speccy Science Principal Geologist and verified by the site geologist.All primary data, data entry procedures, data verification and electronic data storage is per Ausmon procedures.																																

Criteria	JORC Code explanation	Commentary
	<i>verification, data storage (physical and electronic) protocols.</i> <ul style="list-style-type: none"> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> All drill collars was based on hand-held GPS sample locations. Appropriate sampling techniques were used based on discussions with ALS laboratory
<i>Location of data points</i>	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> All drill collars were initially surveyed using a hand-held GPS accurate to 3 meters. The grid system used in MGA 1994 Zone 54.with the drill collars located in the field with a hand-held GPS using the MGA 1994 Zone 54datum. There is little height variation across the area of drilling
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> Drill spacing is appropriate for this stage of Exploration. Sample spacing was designed to allow appropriate anomaly definition for this early stage of exploration.
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> Drill traverses were designed along road verges with available sites for an aircore drilling operation targeting the flat lying Loxton Parilla Sands to an average depth of 18m and maximum depth of 20m.
<i>Sample security</i>	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> All samples were secured by field geologist and delivered to the laboratory after the sampling program was completed by the AUSSAM Senior Geologist
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> The sampling technique was reviewed onsite by Speccy Science and the site geologist.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and</i>	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests,</i> 	<ul style="list-style-type: none"> Drilling completed in EL 6795 (Parrakie), in South Australia, Australia The tenements are owned by AusPEM, a subsidiary of Ausmon Resources Limited.

Criteria	JORC Code explanation	Commentary
<i>land tenure status</i>	<p><i>historical sites, wilderness or national park and environmental settings.</i></p> <ul style="list-style-type: none"> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> The tenements are located in South Australia approximately 300km east of Adelaide Lameroo and Pinaroo are the nearest town There are no JVs and Royalties There are no Native Title claimants The tenements are located in the Limestone Coast Inspectorate
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> Churchill explored for diatomite bearing siltstone in the top of the Parilla sand in the central portion of the licence. Agricola Minerals for diatomite deposits near the town of Germanium bearing siltstone in the top of the Parilla sand in the central portion of the licence following the work of Churchill who didn't measure absorbencies – no diatomite indicated.. Iluka Resources explored for heavy minerals across the tenement with rutile and zircon not being abundant.
<i>Geology</i>	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none">
<i>Drill hole Information</i>	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> All drill collar information is included in a Table in the announcement
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values</i> 	<ul style="list-style-type: none"> The sample results were reported a single meter assays and there was no sample aggregation

Criteria	JORC Code explanation	Commentary
	<i>should be clearly stated.</i>	
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> • The mineralisation is located in the Murray Basin and the target is the flat or near flat lying Loxton/Perilla sands. • the sampling is appropriate for this level of exploration
<i>Diagrams</i>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • A table showing the drill collar locations in relation to EL 6795, is included in the announcement.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • All exploration results for the multi elements are included a tables in the announcement
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • There is no other relevant information to add
<i>Further work</i>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • Infill and extension drilling along the road verges ahead of more closely spaced drilling within freehold land parcels adjacent to the road drilling sited within EL 6795. • Select a subset of samples to be sent to ALS in Adelaide for multielement REE geochemistry using Method 81

Hole ID	From	To	Sample #	Ba	Ce	Cr	Cs	Dy	Er	Eu	Ga	Gd	Hf	Ho	La	Lu	Nb	Nd	Pr	Rb	Sc	Sm	Sn	Sr	Ta	Tb	Th	Ti	Tm	U	V	W	Y	Yb	Zr
	m	m		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
25PKAC004	16	17	PKAC0288	231	268	44	1.98	11.35	4.11	5.75	6.9	16.85	2.47	1.74	105	0.46	4.79	135	35.8	56.4	5.2	26.8	1.5	41.5	0.5	2.46	6.79	0.17	0.58	0.88	111	1.7	27.1	3.75	89
25PKAC004	17	18	PKAC0289	571	151	55	2.63	14.8	6.63	5.46	8.5	18.15	2.92	2.62	95.2	0.86	5.99	116.5	29.3	68.4	8	25.3	1.8	53.6	0.5	2.93	8.36	0.2	0.96	1.08	144	1.9	36.5	6.45	110
25PKAC005	15	16	PKAC0290	176	430	34	1.55	15.7	8.31	4.06	4.8	16.05	2.82	2.97	75.9	1.07	3.14	82.3	21.7	41.7	4.1	18.6	1.6	48.7	0.3	2.75	5.98	0.11	1.12	2.92	85	1.6	67.7	7.37	117
25PKAC006	11	12	PKAC0291	309	513	38	2.21	15.1	7.07	4.98	5.4	18.45	2.4	2.75	85	0.87	3.68	106	26.8	77.3	5.4	24.7	1.8	47.4	0.5	2.76	6.88	0.11	0.98	1.82	95	2	62.2	5.86	96
25PKAC006	11	12	PKAC0292	328	608	38	2.37	22	10.05	7.54	5.8	27.4	3.04	4.06	124.5	1.21	4.28	154	39.4	78.2	6.2	34.3	1.6	48.7	0.4	4.18	7.55	0.12	1.45	2.12	98	1.7	92.3	8.53	118
25PKAC007	12	13	PKAC0293	217	335	42	1.98	33.2	14.6	12.45	5.3	46.6	3.05	6.07	244	1.62	4.23	280	72.2	55	5.2	55.9	1.6	62.3	0.4	6.67	7.77	0.13	1.93	1.26	105	1.7	107	11.35	125
25PKAC008	5	6	PKAC0294	227	259	41	2.52	18.3	7.48	7.27	7.2	24.6	1.84	3.15	119.5	0.88	3.28	149.5	39	52.9	6.6	32.5	1.8	49.2	0.4	3.77	7.29	0.13	1.08	0.68	95	2.2	48.7	6.39	68
25PKAC012	14	15	PKAC0295	145.5	9.2	34	1.7	0.81	0.44	0.18	6.2	0.68	1.42	0.17	5	0.08	2.62	3.5	1.03	40.8	5.6	0.77	1.4	18.8	0.3	0.11	5.67	0.1	0.08	0.56	91	1.8	3.9	0.56	56
25PKAC013	2	3	PKAC0296	189.5	30.8	35	2.04	3.11	1.92	0.81	7.7	3.36	3.09	0.69	16.4	0.24	3.98	16.6	4.16	39.7	5.9	3.84	1.4	231	0.4	0.55	5.75	0.18	0.26	0.98	98	1.5	19.1	1.69	118
25PKAC013	3	4	PKAC0297	217	115.5	44	2.43	4.88	2.63	1.62	9.6	5.74	3.62	0.99	34.6	0.35	5.52	36.8	9.64	47.9	8	8.19	1.8	147.5	0.5	0.91	7.15	0.23	0.36	1.36	120	2	21.8	2.36	139
25PKAC013	9	10	PKAC0298	282	49.1	91	2.92	2.2	1.23	0.38	9.4	1.82	6.52	0.43	10.5	0.25	6.97	10.2	2.67	56.5	11.8	2.43	2	51.5	0.6	0.33	12.45	0.23	0.19	1.38	291	2.9	10.2	1.38	263
25PKAC013	14	15	PKAC0299	968	77	85	1.5	11.45	6.33	3.13	5	14.85	9.97	2.43	60.5	0.7	6.62	67.7	16.15	43.2	7.5	13.35	1.9	89.7	0.5	2.08	12.2	0.19	0.78	1.06	332	4.2	64.9	4.75	424
25PKAC014	11	12	PKAC0300	120.5	7.5	22	1.02	0.57	0.34	0.15	4.1	0.57	1.29	0.13	4	0.06	1.76	3.2	0.8	29.5	3.2	0.59	0.8	15.4	0.2	0.11	3.35	0.06	0.05	0.54	44	1.5	3.3	0.38	49
25PKAC018	5	6	PKAC0302	319	47.7	40	3.06	1.39	0.83	0.61	8.5	1.6	1.98	0.3	28.4	0.15	9.46	16.2	4.98	84.8	6.5	2.36	2.1	48.3	0.6	0.25	7.59	0.14	0.11	1.74	94	2	6.5	0.7	74
25PKAC018	14	15	PKAC0303	243	88	45	1.54	3.26	1.58	1.37	4.2	5.12	6.34	0.62	35.3	0.24	5.34	38.6	9.91	49.2	5	6.95	1.5	36.7	0.5	0.66	8.45	0.15	0.25	1.8	123	1.8	16.7	1.54	282
25PKAC018	15	16	PKAC0304	223	174.5	45	1.6	9.04	4.08	3.21	4.8	11.75	8.21	1.65	61.8	0.53	5.35	75.6	19.4	46.8	4.1	16.25	1.4	38	0.5	1.75	7.47	0.17	0.58	1.92	100	8.9	35.2	3.75	352
25PKAC018	16	17	PKAC0305	208	236	62	1.46	20.1	10.85	4.53	4	21.5	26.2	4.14	83.9	1.44	9.44	98	23.6	39.5	4	21.8	1.9	37.6	1	3.42	13.8	0.31	1.55	3	98	2.4	100.5	9.57	1160
25PKAC020	17	18	PKAC0306	269	135	59	2.04	8.84	4.69	2.61	5.9	9.98	11.6	1.67	49.6	0.68	6.86	61.1	15.85	58.6	6.2	12.6	1.7	35.2	0.7	1.52	9.19	0.23	0.69	1.82	113	2.3	31	4.61	494
25PKAC020	18	19	PKAC0307	281	138.5	65	1.8	18.4	10.3	4.61	5.1	21.5	17.35	3.83	106.5	1.21	8.04	105.5	26.7	57.5	4.5	21.2	3.6	37.7	0.8	3.37	9.94	0.28	1.39	2.15	110	2.9	80.7	7.85	769
25PKAC020	19	20	PKAC0308	256	72.7	65	1.62	8.55	5.13	2.16	4.1	11.35	15.75	1.89	68.2	0.55	8.88	55.6	14.05	53.3	4.4	9.39	1.5	36.4	0.9	1.49	8.62	0.29	0.61	1.84	109	2.3	64.9	3.66	669
25PKAC021	15	16	PKAC0310	179	124.5	39	1.26	4.17	2.49	1.16	3.8	5.44	8.08	0.89	31.1	0.36	5.5	33.4	8.93	38.7	4.8	6.5	1.2	25.2	0.5	0.74	6.32	0.17	0.36	1.24	75	2.3	21.2	2.46	342
25PKAC021	16	17	PKAC0311	278	171	38	1.56	10.3	5.25	3.92	4.2	14.7	4.74	2.04	90.5	0.67	3.82	96.4	25.2	57.6	3	17	1	39.3	0.5	2.06	5.93	0.12	0.7	1.25	80	1.7	43.8	4.24	196
25PKAC021	17	18	PKAC0312	311	88.5	39	1.48	11.55	6.35	3.06	3.7	14.05	5.34	2.48	61	0.68	3.91	65.2	16.4	58.3	2.4	13.85	1.2	41.6	0.4	2.11	6.58	0.12	0.81	1.35	86	1.3	56.6	4.75	235
25PKAC023	4	5	PKAC0313	138.5	12.5	53	1.84	0.93	0.55	0.2	6.7	0.75	2.05	0.19	7.3	0.11	4.63	5	1.4	27.5	6.1	0.95	1.7	31.7	0.5	0.14	9.6	0.16	0.1	0.68	186	2.1	4.9	0.59	80