

High-grade results from development and drilling

WA gold development company Rox Resources Limited (“**Rox**” or “**the Company**”) (ASX: RXL) is pleased to provide the latest assay results and an update on site activities at its 100%-owned Youanmi Gold Mine (“**Youanmi**”) in Western Australia.

Highlights:

- **Underground diamond drilling at United North returns significant intercepts, with host shear zones observed in all drill holes:**
 - **10.40m @ 2.65g/t Au from 113.83m (UNN26_009),**
 - including 4.37m @ 4.96g/t Au from 119.86m
 - **5.00m @ 6.39g/t Au from 108.00m (UNN26_011),**
 - including 1.27m @ 22.36g/t Au from 110.83m
 - **6.13m @ 2.96g/t Au from 118.50m (UNN26_012),**
 - including 1.36m @ 8.62g/t Au from 119.00m;
 - and 0.55m @ 6.24g/t Au from 123.49m
 - **2.24m @ 39.33g/t Au from 220.70m (UNN26_014)**
- **Underground face sampling assay results at United North return higher grades than modelled for the DFS**
- **Ore drive development extending beyond the DFS mine plan, with results reinforcing that mineralisation extends further than outlined in the DFS**
- **Youanmi Deeps resource conversion and exploration drilling on track to begin in Q3 CY2026**
- **Pacific Energy contract signed to develop thermal, solar and battery facility to power Youanmi**

Managing Director & CEO Mr Phill Wilding commented:

“Underground infill drilling at United North has continued to return significant high-grade results, further solidifying Rox’s mine plan and continuing to derisk delivery from the high-grade Youanmi ore system.

“Development drives are now progressing beyond the DFS mine plan, delivering encouraging face sampling results which are strengthening our confidence in mineralisation extending beyond that outlined in the DFS.

“Combined, these results are setting the stage for the Youanmi Gold Mine to progress towards our aspiration of becoming a 150,000ozpa operation in future years.

“We are also pleased to announce our power purchase agreement with industry-leading energy provider Pacific Energy to deliver our multi-sourced power station at Youanmi.

“Coupling all of this activity with yet another record month of development advance, infrastructure going into the mine and construction progress on the processing plant, Rox remains firmly on track to be delivering gold in mid-CY2027.”

United North Grade Control Drilling

Diamond drilling at United North is continuing on-schedule, with 17 holes for 3,198m completed in July.

The primary focus of this initial drilling is to ensure that by mid-CY2027, the mine is sufficiently infill drilled to 12 months ahead of mining (Figure 1), de-risking ore delivery to the mill and providing increased operational certainty.

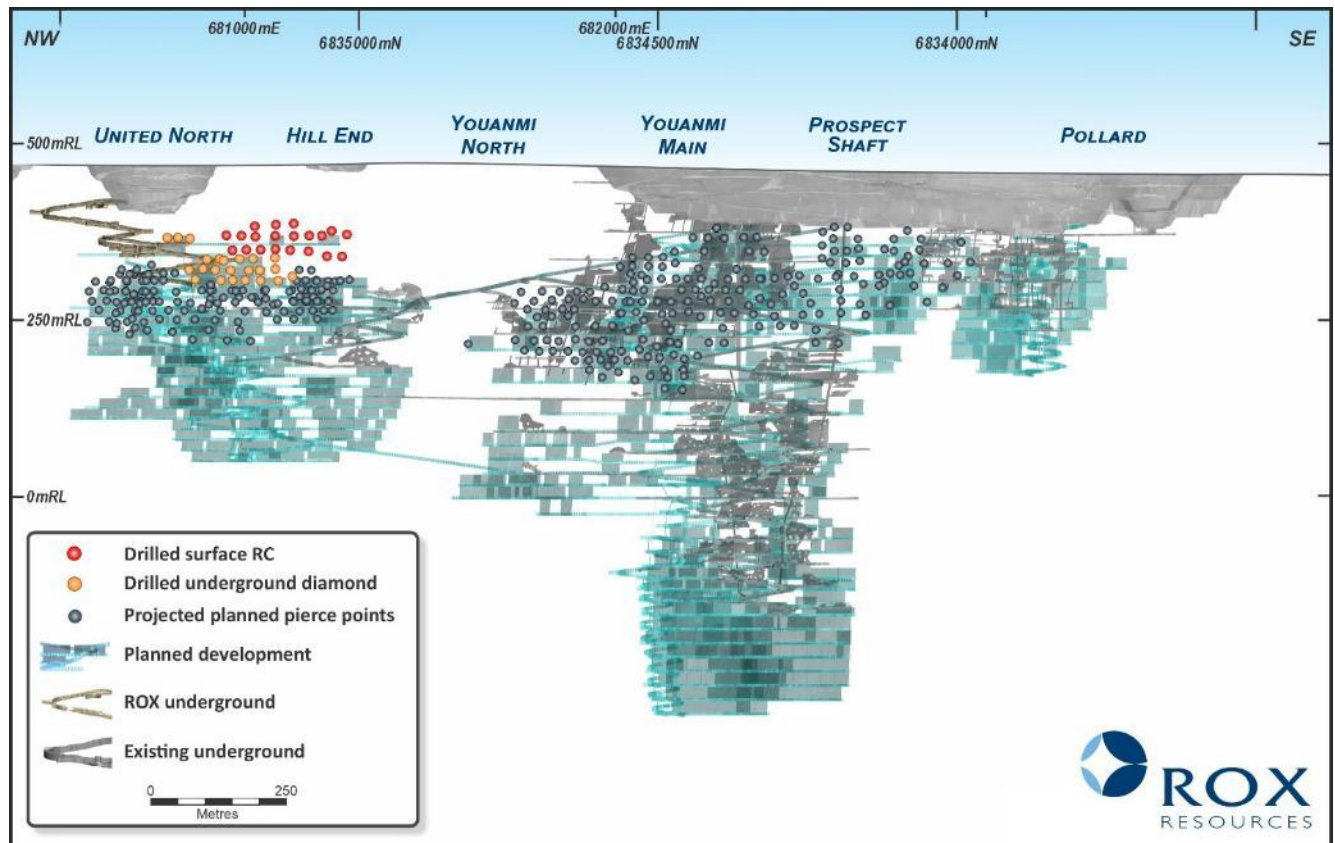


Figure 1 – Youanmi DFS mine plan long section with resource model infill drilling pierce points

Latest results continue the trend of mineralisation as outlined in the recent announcement High Grade Drilling Results, 16th July 2026 (Table 1).

Results have continued to show the potential for significant expansion of the upper levels of the United North mine beyond the Definitive Feasibility Study (“**DFS**”) mine plan.

Significant results include:

- UNN26_009: 10.40m @ 2.65g/t Au from 113.83m
 - incl. 4.37m @ 4.96g/t Au from 119.86m
- UNN26_011: 5.00m @ 6.39g/t Au from 108.00m
 - incl. 1.27m @ 22.36g/t Au from 110.83m
- UNN26_012: 6.13m @ 2.96g/t Au from 118.50m

- incl. 1.36m @ 8.62g/t Au from 119.00m;
- and 0.55m @ 6.24g/t Au from 123.49m
- UNN26_014: 2.24m @ 39.33g/t Au from 220.70m

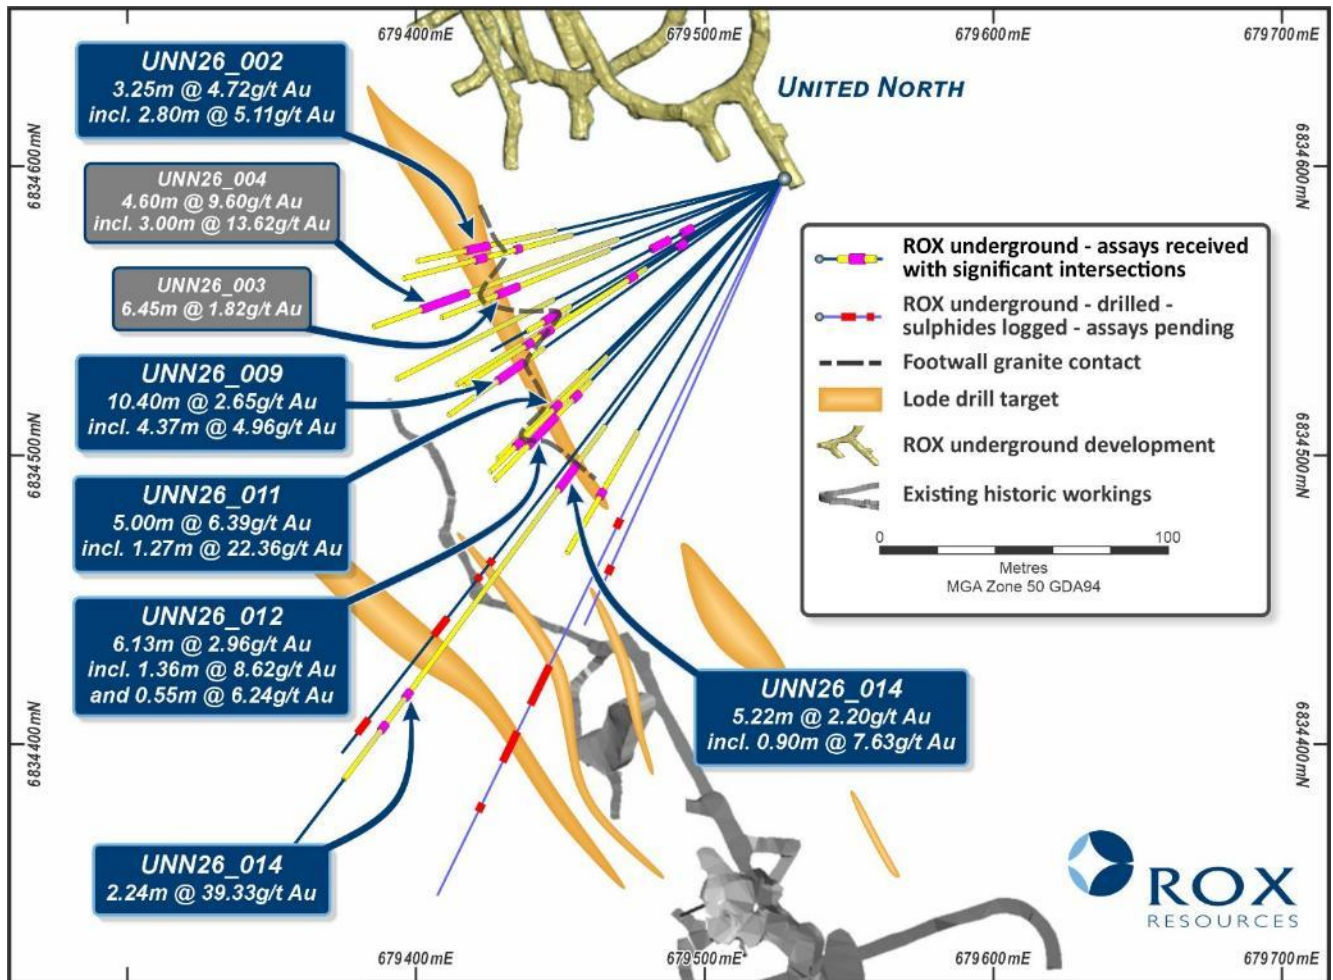


Figure 2 – United North underground diamond drilling results

Hole ID	Hole Type	From (m)	To (m)	Interval (m)	Au (ppm)	Gram Metres	Date reported
UNN26_003	UGDD	105.10	111.55	6.45	1.82	11.73	16/07/2026
UNN26_003	UGDD	104.00	105.00	1.00	2.59	2.59	16/07/2026
UNN26_003	UGDD	131.58	136.18	4.60	9.60	44.18	16/07/2026
	incl.	132.00	135.00	3.00	13.62	40.85	16/07/2026

Table 1 – United North underground previously reported drilling intercepts

Ore drive development has continued, with both the 2356 and 2341mRL levels progressing beyond the DFS mine plan, as shown in Figure 4. Channel samples received, shown in Figure 3, continue to support the interpretation that mineralisation extends further than outlined in the DFS.

Assays from the 2356mRL level are still pending, however, the mapped host shear zone in that level correlates with 2341mRL level, for which assay results have been received.

Additionally, a second ore drive on the 2341mRL level is being developed, beyond the DFS mine plan. Face grades returned to date are encouraging and may provide additional near-term stopping opportunities.

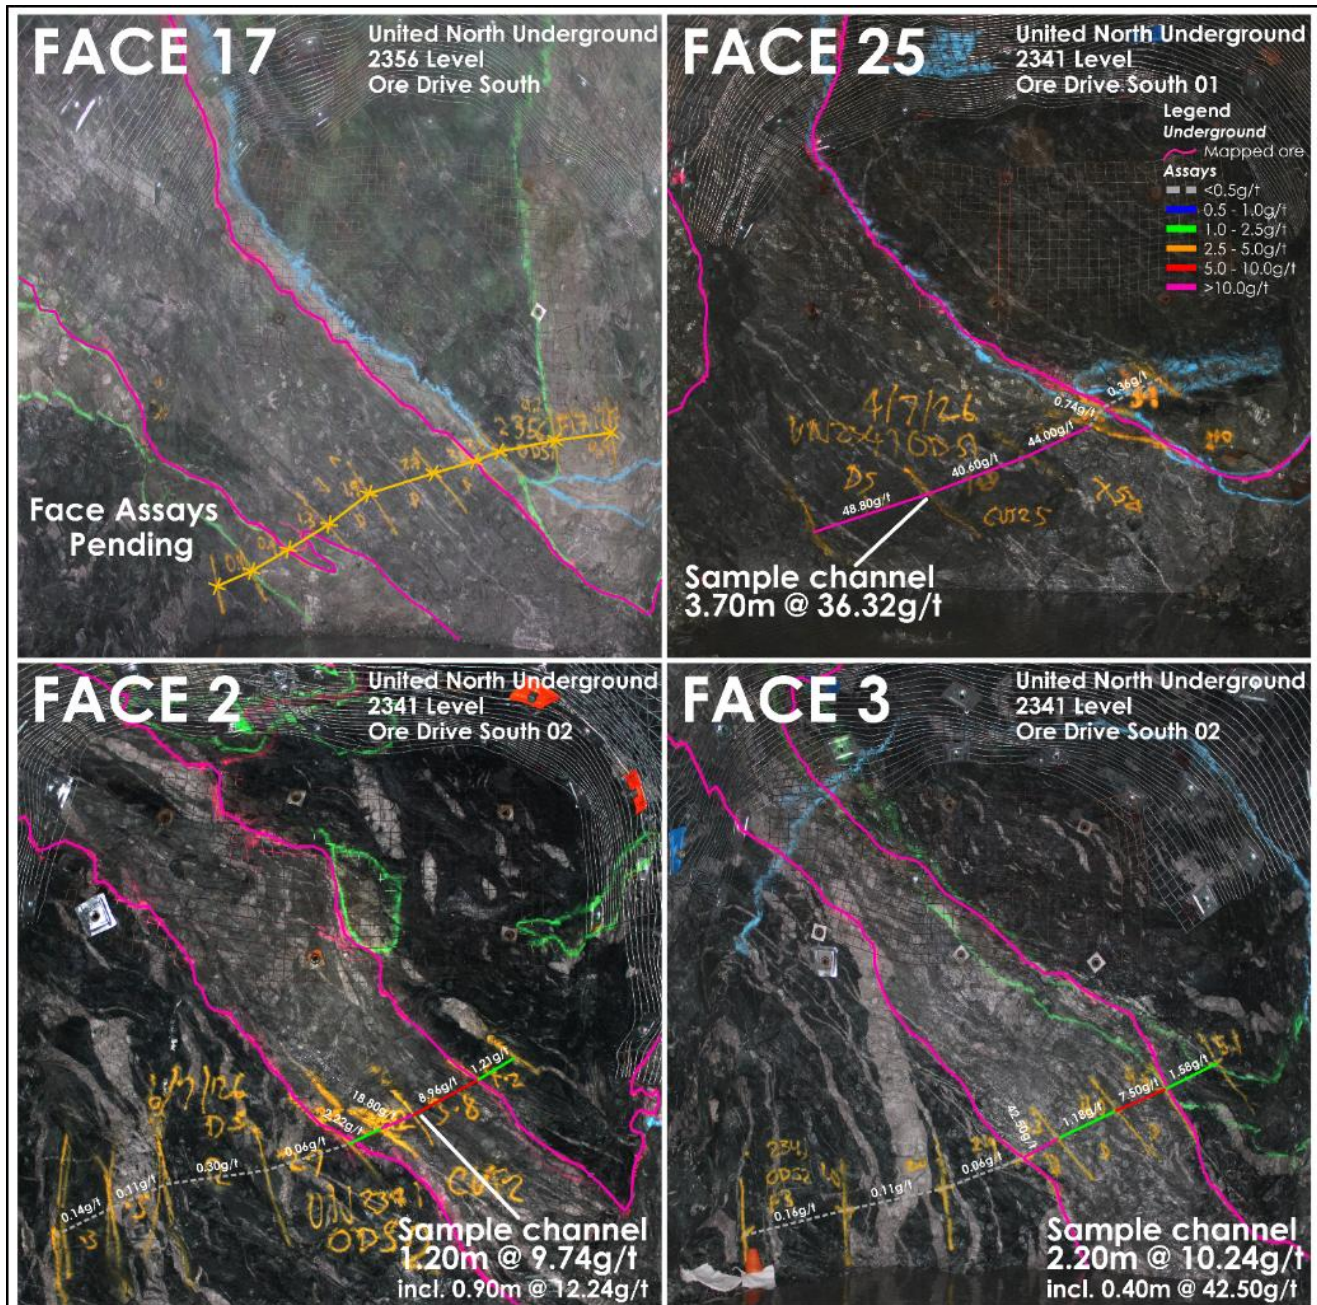


Figure 3 – United North 2356 & 2341mRL ore drives south 01, face 17 & 25 and 2341mRL ore drive south 02 face 2 & 3

**Cautionary Note: Assay results for Face 17 of the 2356mRL ore drive south are pending and no conclusions regarding grade or economic significance should be drawn until assay results are received. The zones which host gold mineralisation at Youanmi are characterised by visually distinct, sulphide-rich shear zones which can be mapped underground and identified in drill core logging. However, the presence of these shear zones should not be used to infer gold or other element concentrations, which can only be determined from assay analysis. Channel samples from advancing development on 2341mRL level are operational in nature and are not equivalent to resource definition drilling.*

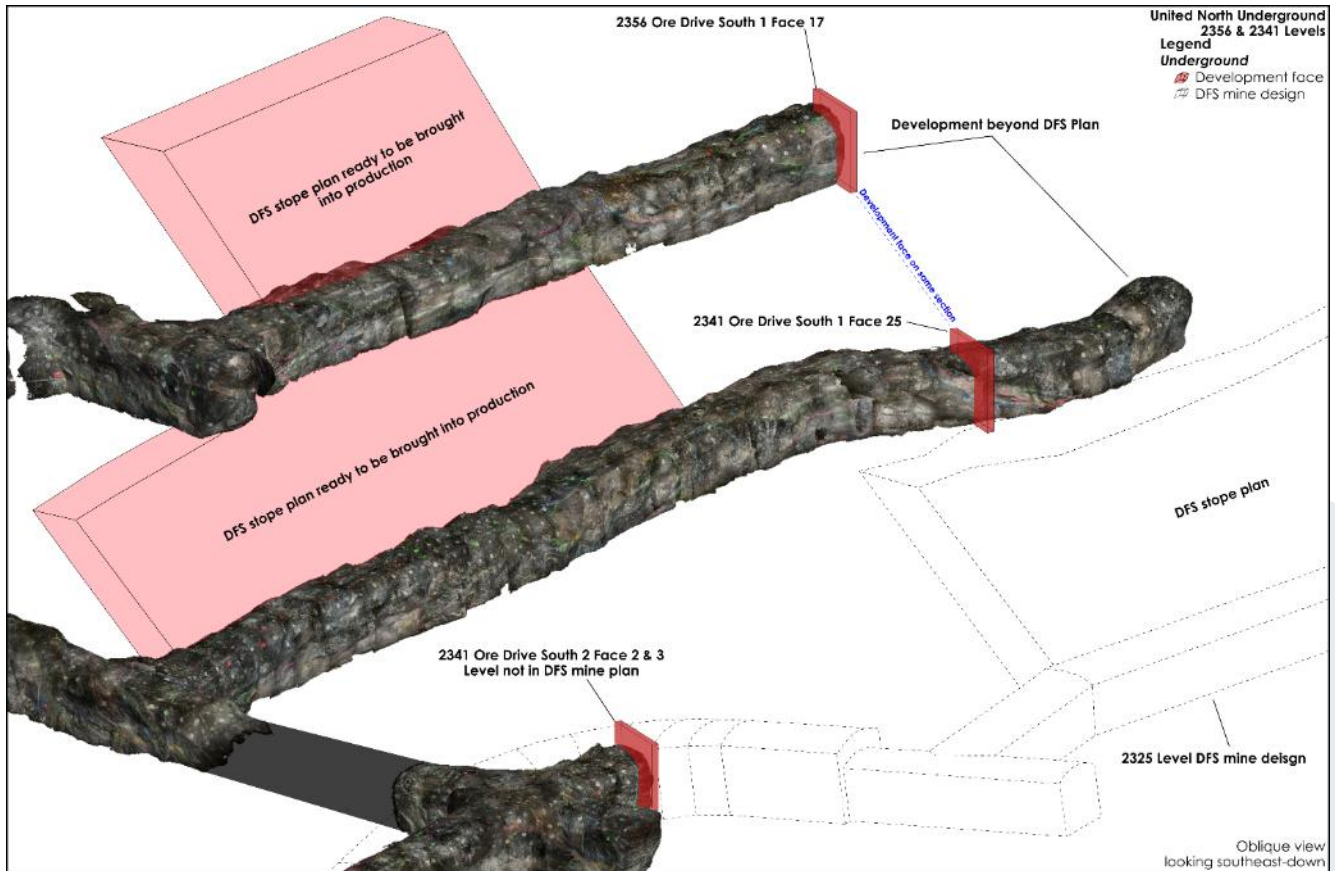


Figure 4 – United North 2356 & 2341mRL ore drives south with DFS mine plan, oblique view looking down to the southeast

Development on major contracts

Rox has executed the next major contract, signing a Power Purchase Agreement (“**PPA**”) with Pacific Energy Pty Ltd (“**PEL**”) in the form of a Build Own Operate (“**BOO**”) package, with pricing in line with assumptions in the DFS financial model. The initial term of the Agreement is 10 years, with extension opportunities available to support future growth in the Life of Mine.

Once complete, the power station will have the ability to generate 25MW in thermal power and 26MWdc in solar power, with provisions for 2MW of backup diesel. The facility will also have a 9.3MVA battery for dynamic support, along with 11kV power distribution to the underground feeders and village.

PEL is a leading independent power provider for the mining industry in Western Australia with more than 40 owned and operated power stations across the state.

PEL have already commenced mobilisation to site (see Figure 5).



Figure 5 – View of North-West, looking South-East, power station lower left corner

The final outstanding major contract is the oxygen supply contract, with final negotiations underway. Previously secured major contracts include:

- Process Plant and Associated Infrastructure EPC – Interquip Construction Pty Ltd (Interquip)
- IsaMill and OxiLeach Reactor (Albion Circuit) Supply – Glencore Technology Pty Limited
- Liquefied Natural Gas (LNG) Supply and Storage - Cefa Evol Pty Ltd
- Bulk Earthworks and Road Construction - Lambron Contracting Pty Ltd

Construction of Rox's Processing Plant

EPC provider Interquip is progressing on schedule with the construction works for the processing plant at Youanmi, designed with a nameplate capacity of 1.0Mtpa.

Concrete foundations are progressing to plan, including completion of the screen plant and carbon-in-leach (“**CIL**”) ring beams. Work is progressing on the crusher, conveyor, fine ore bin, tunnel, and ball mill.

On-site, CIL tank steel plates have arrived, and construction is underway, while all long-lead equipment remains on schedule (see Figure 6 & 7).



Figure 6 – Progress of construction on site



Figure 7 – Mill construction at Youanmi

Bulk earthworks are progressing to plan with the majority of the plant area complete and the tailings dam progressing well with all topsoil clearing nearing completion.

Mining Operations

Mining is continuing to exceed overall advance rates from the DFS, with 522m of mining completed in July, including 350m of development advance across the three mining areas and 172m of stripping in the historic Youanmi Decline.

Secondary ventilation has now been established for both Youanmi and Pollard declines (see Figure 8), along with the initial primary ventilation circuit in United North (see Figure 9 & 10), allowing works to accelerate thereby opening up more operational areas.

Works are rapidly advancing on installation of primary pump stations, along with escapeways, to enable production stoping to commence in coming months.



Figure 8 – Main pit



Figure 9 – Installing primary ventilation fans in United North



Figure 10 – Installing primary ventilation fans in United North

Pathway to production

Rox's indicative pathway to production remains on track (see Figure 11) with the following tasks completed or now underway:

- Definitive Feasibility Study released in November 2025
- Project funding completed
 - \$200m Placement + \$18m SPP completed December 2025 to finalise the equity funding component
 - \$350m Debt Financing facilities secured in March 2026
- MDCP approval for processing plant, tailings and associated site infrastructure received in March 2026
- Final Investment Decision approved by the Board in March 2026
- Dewatering at Main Pit completed, transitioned to underground dewatering
- Mining works underway on all planned declines
- Infill drilling commenced from underground
- Interquip EPC contract executed, construction commenced
- Works Approval received in July 2026

Next steps

- Finalise one remaining major contract for Oxygen Supply. Preferred supplier selected and early works agreement in place
- Continue defining near-mine and regional targets including review of recent airborne magnetic survey
- Continue development from all declines and building the ore stockpile
- Satisfy all conditions precedent to drawdown of the Debt Facility

		CY25		CY26			CY27					
		Q4		Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	
Key Project Milestones	Deliverables	DFS	Funding and FID		Mill construction and commissioning					First gold	Operating	
Drilling	Definition, Extension, Growth			Resource Definition, Growth and Exploration Drilling								
Ancillary	Approvals	MDCP Plant & Tails										
		Works Approvals										
	Camp Construction	Phase 1 60 Rooms	Phase 2 - 240 Rooms and Dry Mess									
Processing	Design		Plant Engineering Drawings and Early Component Orders									
	Mill Construction			Processing Plant Ground Works	Processing Plant Construction							
	Mill Commissioning							Mill Commission				
	Related Infrastructure Construction					Construction of Tailings Storage Facility, Power Station, Oxygen Facility				PV (Solar) Installation		
Mining	Dewatering	Main pit and start of Youanmi UG			Underground Dewatering							
	Underground Mining		United North Development				United North Stope Production					
						Youanmi Development			Youanmi Stope Production			
						Pollard Development						
						Commissioning Ore Stockpile Build - target 190kt at 3.3g/t Au						

Figure 11 – Pathway to Production Timeline

Authorisation:

This announcement is authorised for release by the Board of Rox Resources Limited.

--- Ends ---

For further information, please contact:

Investor Inquiries

Phillip Wilding
Managing Director & CEO
Rox Resources Limited
admin@roxresources.com.au
+61 8 9226 0044

Media Inquiries

Emily Evans
Media and Content Manager
SPOKE
emily@hellospoke.com.au
+61 401 337 959

Rox Resources Limited

ABN 53 107 202 602
Level 1, 87 Colin Street, West Perth WA 6005
www.roxresources.com.au

About Rox Resources

Rox Resources (ASX: RXL) is a West Australian focused gold development company. It is the 100 per cent owner of the historic Youanmi Gold Project near Mt Magnet, approximately 480 kilometres northeast of Perth.

The Company's focus is on the development of the high-grade, high-margin Youanmi Gold Project that hosts a global mineral resource of 12.1Mt at 5.6g/t for 2.2Moz of gold. With a clear strategic and execution plan to production, Rox Resources offers significant value to its investors.

Competent Persons Statement

Exploration Results

The information in this release that relates to Data and Exploration Results is based on information compiled and reviewed by Jonathan Streeter a Competent Person who is a Fellow Member of the Australian Institute of Geoscientists (AIG), General Manager Geology at Rox Resources and holds performance rights in the Company. The aforementioned has sufficient experience that is relevant to the style of mineralisation and type of target/deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Streeter consents to the inclusion in the release of the matters based on the information in the form and context in which it appears.

Where reference is made to previous releases of exploration results in this announcement, the Company confirms that it is not aware of any new information or data that materially affects the information included in those announcements and all material assumptions and technical parameters underpinning the exploration results included in those announcements continue to apply and have not materially changed.

The information in this report that relates to previous Exploration Results was prepared and first disclosed under the JORC Code 2012 and has been properly and extensively cross-referenced in the text to the date of the original announcement to the ASX.

Resource Statements

The information in this report that relates to Mineral Resources at the Youanmi Gold Project is based on information compiled by Steve Le Brun, a Competent Person who is a Fellow of the Australian Institute of Geoscientists (FAIG) and a Fellow of the Australian Institute of Mining & Metallurgy (FAusIMM). Mr Le Brun is the Principal Resource Geologist for Rox Resources and holds shares and performance rights in the Company. Mr Le Brun has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Le Brun consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

Forward-Looking Statements

Certain statements in this announcement relate to the future, including forward-looking statements relating to the Company and its business (including its projects). Forward-looking statements include, but are not limited to, statements concerning Rox Resources Limited planned exploration program(s) and other statements that are not historical facts. When used in this document, the words such as "could," "plan," "estimate," "expect," "intend," "may", "potential," "should," and similar expressions are forward looking statements.

These forward-looking statements involve known and unknown risks, uncertainties, assumptions, and other important factors that could cause the actual results, performance or achievements of the Company to be materially different from future results, performance or achievements expressed or implied by such statements. Actual events or results may differ materially from the events or results expressed or implied in any forward-looking statement and deviations are both normal and to be expected. Neither the Company, its officers nor any other person gives any representation, assurance or guarantee that the events or other matters expressed or implied in any forward-looking statements will actually occur. You are cautioned not to place undue reliance on those statements.

Appendix 1

Table 1 – Collar Locations and Drilling Details

Hole ID	Prospect	Hole Type	MGA East	MGA North	MGA RL	Depth	Dip	Azi
UNN26_001	United North	UGDD	679,523	6,834,595	336.26	136.20	-0.74	253.82
UNN26_002	United North	UGDD	679,523	6,834,595	336.17	131.40	-7.97	256.45
UNN26_006	United North	UGDD	679,523	6,834,595	336.50	116.70	6.98	237.78
UNN26_007	United North	UGDD	679,523	6,834,595	336.36	131.87	-0.16	236.21
UNN26_008	United North	UGDD	679,523	6,834,595	336.03	133.40	-8.3	235.98
UNN26_009	United North	UGDD	679,523	6,834,595	335.94	145.30	-13.65	233.20
UNN26_010	United North	UGDD	679,523	6,834,595	336.19	140.83	-0.37	224.05
UNN26_011	United North	UGDD	679,523	6,834,595	336.10	139.40	-7.31	225.57
UNN26_012	United North	UGDD	679,523	6,834,594	336.06	146.70	-11.85	223.57
UNN26_014	United North	UGDD	679,523	6,834,594	335.87	308.90	-12.38	214.83
UNN26_015	United North	UGDD	679,523	6,834,594	336.14	146.80	-1.37	209.61

Table 2 – Wall Sampling Details

Hole ID	Prospect	Sample Type	MGA East	MGA North	MGA RL	Depth	Dip	Azi
UNN_2341_ODS1_F19_A	United North	UGFS	679,430	6,834,621	343.59	4.20	18.19	256.30
UNN_2341_ODS1_F20_A	United North	UGFS	679,432	6,834,619	343.42	5.20	7.61	228.72
UNN_2341_ODS1_F21_A	United North	UGFS	679,432	6,834,614	343.26	5.30	10.82	240.76
UNN_2341_ODS1_F21S_A	United North	UGFS	679,429	6,834,613	344.73	2.10	37.88	276.20
UNN_2341_ODS1_F22_A	United North	UGFS	679,431	6,834,610	343.22	4.50	11.58	259.20
UNN_2341_ODS1_F23_A	United North	UGFS	679,431	6,834,607	343.90	4.70	10.57	258.19
UNN_2341_ODS1_F24_A	United North	UGFS	679,431	6,834,605	343.19	3.90	28.70	261.12
UNN_2341_ODS1_F25_A	United North	UGFS	679,431	6,834,602	343.48	3.70	23.59	264.22
UNN_2341_ODS1_F26_A	United North	UGFS	679,431	6,834,599	343.48	3.10	24.79	248.22
UNN_2341_ODS1_F27_A	United North	UGFS	679,432	6,834,597	343.34	3.60	32.28	217.17
UNN_2341_ODS2_F2_A	United North	UGFS	679,376	6,834,664	341.67	4.20	23.34	223.12
UNN_2341_ODS2_F3_A	United North	UGFS	679,378	6,834,660	341.60	5.10	8.28	226.07
UNN_2356_ODS1_F5_A	United North	UGFS	679,431	6,834,656	357.04	5.20	6.98	214.71
UNN_2356_ODS1_F6_A	United North	UGFS	679,432	6,834,652	356.98	5.10	16.92	256.34
UNN_2356_ODS1_F7_A	United North	UGFS	679,433	6,834,648	356.93	5.20	20.02	240.31
UNN_2356_ODS1_F8_A	United North	UGFS	679,433	6,834,643	357.14	4.50	8.16	243.42
UNN_2356_ODS1_F9_A	United North	UGFS	679,436	6,834,640	357.00	5.10	12.13	240.26
UNN_2356_ODS1_F10_A	United North	UGFS	679,436	6,834,636	357.15	4.00	29.59	246.20
UNN_2356_ODS1_F11_A	United North	UGFS	679,437	6,834,633	356.89	3.60	40.98	228.62
UNN_2356_ODS1_F12_A	United North	UGFS	679,439	6,834,630	356.94	3.90	18.01	222.27
UNN_2356_ODS1_F13_A	United North	UGFS	679,440	6,834,625	357.83	4.30	15.35	262.90
UNN_2356_ODS1_F14_A	United North	UGFS	679,441	6,834,622	357.74	4.00	7.20	246.74

Table 3 – Underground Drilling Significant Intersections

(Significant intervals are reported to geological and/or grade boundaries above 1.5g/t Au and a 2.5 gram-metre Au threshold, with maximum 3m internal waste; “including” intervals generally above 10 gram-metres; downhole widths reported).

Hole ID	Prospect	Sample Type	From	To	Interval	Au g/t	Au g.m.
UNN26_001	United North	UGDD	118.48	118.96	0.48	5.97	2.87
UNN26_002	United North	UGDD	105.95	106.85	0.90	13.20	11.88
UNN26_002	United North	UGDD	110.55	113.80	3.25	4.72	15.34

Table 3 – Underground Drilling Significant Intersections

(Significant intervals are reported to geological and/or grade boundaries above 1.5g/t Au and a 2.5 gram-metre Au threshold, with maximum 3m internal waste; “including” intervals generally above 10 gram-metres; downhole widths reported).

Hole ID	Prospect	Sample Type	From	To	Interval	Au g/t	Au g.m.
incl.			111.00	113.80	2.80	5.11	14.32
UNN26_006	United North	UGDD	87.00	88.42	1.42	4.73	6.72
UNN26_008	United North	UGDD	105.00	107.17	2.17	2.53	5.50
UNN26_009	United North	UGDD	113.83	124.23	10.40	2.65	27.56
incl.			119.86	124.23	4.37	4.96	21.68
UNN26_009	United North	UGDD	133.65	135.05	1.40	4.16	5.83
incl.			134.73	135.05	0.32	14.20	4.54
UNN26_011	United North	UGDD	108.00	113.00	5.00	6.39	31.93
incl.			110.83	112.10	1.27	22.36	28.39
UNN26_012	United North	UGDD	114.30	117.00	2.70	2.41	6.52
incl.			116.69	117.00	0.31	8.32	2.58
UNN26_012	United North	UGDD	118.50	124.63	6.13	2.96	18.16
incl.			119.00	120.36	1.36	8.62	11.72
and			123.49	124.63	0.55	6.24	3.43
UNN26_012	United North	UGDD	129.00	130.92	1.92	1.96	3.76
UNN26_014	United North	UGDD	128.70	133.92	5.22	2.20	11.51
incl.			128.70	129.60	0.90	7.63	6.87
UNN26_014	United North	UGDD	151.70	152.00	0.30	18.60	5.58
UNN26_014	United North	UGDD	220.70	222.94	2.24	39.33	88.10

Table 4 – Wall Sampling Significant Intersections

(Significant intervals are reported to geological and/or grade boundaries above 1.5g/t Au and a 2.5 gram-metre Au threshold, with maximum 3m internal waste; “including” intervals generally above 10 gram-metres; downhole widths reported).

Hole ID	Prospect	Sample Type	From	To	Interval	Au g/t	Au g.m.
UNN_2341_ODS1_F19_A	United North	UGFS	2.40	3.20	0.80	7.51	6.00
UNN_2341_ODS1_F20_A	United North	UGFS	3.00	5.20	2.20	6.54	14.39
incl.			4.30	5.20	0.90	13.87	12.48
UNN_2341_ODS1_F21_A	United North	UGFS	4.80	5.30	0.50	8.24	4.12
UNN_2341_ODS1_F21S_A	United North	UGFS	0.50	2.10	1.60	12.65	20.24
incl.			1.10	1.60	0.50	30.40	15.20
UNN_2341_ODS1_F22_A	United North	UGFS	3.30	4.50	1.20	14.41	17.29
incl.			3.90	4.50	0.60	19.30	11.58
UNN_2341_ODS1_F23_A	United North	UGFS	2.20	4.70	2.50	21.01	52.52
incl.			2.20	3.50	1.30	39.30	51.09
UNN_2341_ODS1_F24_A	United North	UGFS	2.60	3.10	0.50	5.82	2.91
UNN_2341_ODS1_F25_A	United North	UGFS	0.00	3.70	3.70	36.32	134.39
UNN_2341_ODS1_F26_A	United North	UGFS	1.00	2.10	1.10	6.94	7.63
UNN_2341_ODS1_F27_A	United North	UGFS	1.20	2.60	1.40	5.98	8.37
UNN_2341_ODS2_F2_A	United North	UGFS	2.60	3.80	1.20	9.74	11.68
incl.			2.90	3.80	0.90	12.24	11.02
UNN_2341_ODS2_F3_A	United North	UGFS	2.90	5.10	2.20	10.24	22.52
incl.			2.90	3.30	0.40	42.50	17.00
UNN_2356_ODS1_F5_A	United North	UGFS	1.00	4.40	3.40	8.61	29.28
incl.			1.40	3.40	2.00	13.37	26.74
UNN_2356_ODS1_F6_A	United North	UGFS	0.90	5.10	4.20	14.01	58.845
incl.			0.90	2.40	0.80	41.80	33.44

Table 4 – Wall Sampling Significant Intersections

(Significant intervals are reported to geological and/or grade boundaries above 1.5g/t Au and a 2.5 gram-metre Au threshold, with maximum 3m internal waste; “including” intervals generally above 10 gram-metres; downhole widths reported).

Hole ID	Prospect	Sample Type	From	To	Interval	Au g/t	Au g.m.
		and	4.80	5.10	0.30	38.30	11.49
UNN_2356_ODS1_F7_A	United North	UGFS	1.80	2.80	1.00	6.92	6.92
UNN_2356_ODS1_F8_A	United North	UGFS	1.00	3.70	2.70	7.09	19.15
		incl.	2.90	3.70	0.80	13.80	11.04
UNN_2356_ODS1_F9_A	United North	UGFS	1.00	3.50	2.50	3.96	9.90
		incl.	2.40	2.90	0.50	10.00	5.00
UNN_2356_ODS1_F10_A	United North	UGFS	1.30	3.00	1.70	3.86	6.56
		incl.	1.30	1.60	0.30	13.50	4.05
UNN_2356_ODS1_F11_A	United North	UGFS	0.90	1.50	0.60	6.76	4.06
UNN_2356_ODS1_F12_A	United North	UGFS	0.60	3.90	3.30	6.67	22.01
		incl.	1.10	2.40	1.30	10.64	13.83
UNN_2356_ODS1_F13_A	United North	UGFS	0.00	4.30	4.30	2.76	11.89
UNN_2356_ODS1_F14_A	United North	UGFS	0.90	4.00	3.10	12.33	38.23
		incl.	2.20	3.10	0.90	31.40	28.26

Table 5 – Glossary of terms

(Terms used by ROX Resources in this release for reporting purposes)

Term	Term Type	Definition
RC	Hole Type	Surface drilled reverse circulation drill hole
RCD	Hole Type	Surface drilled reverse circulation drill hole with diamond core tail
DD	Hole Type	Surface drilled diamond core drill hole
UGDD	Hole Type	Underground drilled diamond drill hole
RC	Sample Type	Surface drilled percussion reverse circulation sample
DD	Sample Type	Surface drilled half cut diamond core sample
UGDD	Sample Type	Underground drilled half cut diamond core sample
UGFS	Sample Type	Underground face sample collected from sample line perpendicular to visually identified mineralised structure by hand held hammer

JORC Table 1 - Section 1 Data and Sampling Techniques

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	RC hole diameter was 5.5" (140 mm) reverse circulation percussion (RC). Sampling of RC holes was undertaken by collecting 1m cone split samples at intervals. Diamond drill hole core size is HQ at the start of the hole, changing to NQ2 in competent rock with NQ2 size diameter through the mineralisation. Sampling of diamond holes was by cut half core as described further below. Drill holes were generally angled at -60° towards grid northeast (but see Table for individual hole dips and azimuths) to intersect geology as close to perpendicular as possible. A handheld XRF instrument was used assist in geological logging. Underground wall samples are chip samples collected by hammer nominally over 1m intervals along the grade line.

JORC Table 1 - Section 1 Data and Sampling Techniques

Criteria	JORC Code explanation	Commentary
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used</i>	Drillhole locations were picked up by differential GPS. Logging of drill samples included lithology, weathering, texture, moisture and contamination (as applicable). Sampling protocols and QAQC are as per industry best practice procedures. Underground wall sample locations are confirmed from Rockmapper survey scans validated from survey control and mapping points set out and picked up with a Leica TS16 total station.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information</i>	RC drillholes were sampled on 1m intervals using a cone splitter. A nominal 3-4kg sample is taken and analysed for gold by Fire Assay 50g (FA50). Diamond core is HQ and NQ2, however dominantly NQ2 size, sampled on geological intervals, with a minimum of 0.3 m up to a maximum of 1.2 m. The diamond core was cut in half, with one half sent to the lab and one half retained. The samples were analysed for gold by Fire Assay 50g (FA50). Underground wall sample boundaries vary to not cross lithological or interpreted mineralised contacts with a minimum of 0.3m up to a maximum of 1.2m. The samples were analysed for gold by Fire Assay 50g (FA50).
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Drilling technique was Reverse Circulation (RC) and diamond core (DD). The RC hole diameter was 140mm face sampling hammer.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed</i>	Diamond core recoveries are logged and recorded in the database. Overall recoveries are typically >99% and there are no apparent core loss issues or significant sample recovery problems. Hole depths are verified against core blocks. Regular rod counts are performed by the drill contractor. There is no apparent relationship between sample recovery and grade. RC drill recoveries were high (>90%).
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples</i>	Samples were visually checked for recovery, moisture and contamination and notes made in the logs.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	There is no observable relationship between recovery and grade, and therefore no sample bias.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Detailed geological logs have been carried out on all RC, but no geotechnical data have been recorded (or is possible to be recorded due to the nature of the sample). Detailed geological and geotechnical logs were carried out on all diamond drill holes for recovery, RQD, structures etc. which included structure type, dip, dip direction, alpha angle, beta angle, texture, shape, roughness, fill material, and this data is stored in the database. Underground lithological mapping is completed on all walls and recorded as per the grade line lithology. All lithological and mineralisation boundaries are mapped on both the walls and backs with contacts being picked up by qualified surveyors. Underground structural measurements are recorded as points. The geological data would be suitable for inclusion in a Mineral Resource estimate.

JORC Table 1 - Section 1 Data and Sampling Techniques

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	Logging of underground walls, diamond core and RC chips recorded lithology, mineralogy, mineralisation, weathering, colour, and other sample features. RC chips are stored in plastic RC chip trays.
	<i>The total length and percentage of the relevant intersections logged</i>	All holes were logged in full.
	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Drill core was cut in half on site using a core saw. Samples were collected from the same side of the core where possible, preserving the orientation mark in the kept core half. If no orientation line was possible a cut line was used on the core.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	RC samples were collected on the drill rig using a cone splitter. If any mineralised samples were collected wet these were noted in the drill logs and database.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	The sample preparation followed industry best practice. Fire Assay samples were dried, coarse crushing to ~10mm, followed by pulverisation of the entire sample in an LM5 or equivalent pulverising mill to a grind size of 85% passing 75 micron.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Field QC procedures involve the use of Certified Reference Materials (CRM's) as assay standards, along with duplicates and blank samples. The insertion rate of the CRM's was approximately 1:20, and blank sample insertion rate was approximately 1:50.
Quality of assay data and laboratory tests	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	For RC drilling field duplicates were taken on a routine basis at an approximate 1:20 ratio using the same sampling techniques (i.e. cone splitter) and inserted into the sample run. No diamond core field duplicates were taken. All underground walls mapped maintain a minimum of 1:20 field duplicate ratio using the same sampling techniques (hammer) and inserted into the sample run. Extra field duplicates are collected at the geologist discretion in and around contacts with the ore lode.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	The sample sizes are considered more than adequate to ensure that there are no particle size effects relating to the grain size of the mineralisation which lies in the percentage range.
	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	The analytical technique involved Fire Assay 50g. Lab XRF was completed on the pulps for the diamond core samples.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No geophysical or portable analysis tools were used to determine assay values stored in the database.
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	Internal laboratory control procedures involve duplicate assaying of randomly selected assay pulps as well as internal laboratory standards. All of these data are reported to the Company and analysed for consistency and any discrepancies.

JORC Table 1 - Section 1 Data and Sampling Techniques

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Senior personnel from the Company have visually inspected mineralisation within significant intersections.
	<i>The use of twinned holes.</i>	No twinned holes to date.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Previously, primary data was collected using a standard set of Excel templates on Toughbook laptop computers in the field. This data was transferred to Geobase Pty Ltd for data verification and loading into the database. ROX currently logs all drilling using DH Logger, on Toughbook laptops, which directly interfaces with the corporate geology database – Fusion. Underground sampling uses Rockmapper which transfers directly into the Fusion database
	<i>Discuss any adjustment to assay data.</i>	No adjustments or calibrations have been made to any assay data.
Location of data points	<i>Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Drill hole locations have been established using a differential GPS with an accuracy of +/- 0.3m. Underground sample locations have been established using a robotic total station (Leica TS16) with an accuracy of +/- 1.5mm at 100m.
	<i>Specification of the grid system used.</i>	The grid system is MGA_94, zone 50S for easting, northing and RL. A local mine grid (ROX grid) is used for daily operations and is a truncation of the MGA94 coordinates: X: – 600,000, Y: – 6,800,000 & Z: + 2,000
	<i>Quality and adequacy of topographic control.</i>	The topography of the area is relatively flat and has been surveyed during the mining period by the mine survey team. The Competent Person considers that the surface is suitable for this MRE
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	RC and diamond drill hole spacing varies 20-200 metres between drill sections, with some areas at 20 metre drill section spacing. Down dip step-out distance varies 20-100 metres.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Data spacing and distribution are sufficient to establish the degree of geological and grade continuity appropriate for JORC (2012) classifications applied.
	<i>Whether sample compositing has been applied.</i>	No sample compositing has occurred for diamond core drilling or underground wall samples. Sample intervals are based on geological boundaries with even one metre samples between. For RC samples, 1m samples were completed for all holes. No composites were taken. UG wall samples vary to not cross lithological or interpreted mineralised contacts with a minimum of 0.3m up to a maximum of 1.2m
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	The mineralisation strikes generally NNW and dips to the west at approximately -60 degrees. The nominal drill orientation was 065 and -60 dip. Drilling is believed to be generally perpendicular to strike.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Regarding RC and diamond core sampling, no sampling bias is believed to have been introduced. The current underground wall sampling does not appear to show any sampling bias; however, this will be reviewed on an ongoing basis.

JORC Table 1 - Section 1 Data and Sampling Techniques

Criteria	JORC Code explanation	Commentary
Sample security	<i>The measures taken to ensure sample security.</i>	Sample security is managed by the Company. After preparation in the field samples are packed into polyweave bags and despatched to the laboratory. For the majority of samples these bags were transported directly to the assay laboratory by the Company. In some cases, the sample were delivered by a transport contractor the assay laboratory. The assay laboratory audits the samples on arrival and reports any discrepancies back to the Company. No such discrepancies occurred.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits have yet been completed.

JORC Table 1 - Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The Youanmi mining centre which comprises the leases: M57/51, M57/75, M57/97, M57/109, M57/135, M57/160A, M57/164, M57/165, M57/166 and M57/167 is 100% owned by Rox Resources.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</i>	The tenements are in good standing and no known impediments exist.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Significant previous exploration has been carried out throughout the project by various companies, including AC/RAB, RC drilling and diamond drilling 1971-1973 WMC: RAB, RC and surface diamond drilling 1976 Newmont: 10 surface diamond drillholes (predominantly targeting base metals). 1980-1986 BHP: RAB, RC and surface diamond drilling (predominantly targeting base metals). 1986-1993 Eastmet: RAB, RC and surface diamond drilling. 1993-1997 Goldmines of Australia: RAB, RC and surface diamond drilling. Underground mining and associated underground diamond drilling. 2000-2003 Aquila Resources Ltd: Shallow RAB and RC drilling 2004-2005 Goldcrest Resources Ltd: Shallow RAB and RC drilling; data validation. 2007- 2013 Apex Minerals NL: 9 diamond holes targeting extensions to the Youanmi deeps resource.

JORC Table 1 - Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The Youanmi Project straddles a 40km strike length of the Youanmi Greenstone Belt, lying within the Southern Cross Province of the Archaean Yilgarn Craton in Western Australia. The greenstone belt is approximately 80km long and 25km wide, and incorporates an arcuate, north-trending major crustal structure termed the Youanmi Fault Zone. This structure separates two discordant greenstone terrains, with the stratigraphy to the west characterised by a series of weakly deformed, layered mafic complexes (Windimurra, Black Range, Youanmi and Barrambie) enveloped by strongly deformed, north-northeast trending greenstones. Gold mineralisation is developed semi-continuously in shear zones over a strike length of 2,300m along the western margin of the Youanmi granite. Gold is intimately associated with sulphide minerals and silicates in zones of strong hydrothermal alteration and structural deformation. Typical Youanmi lode material consists of a sericite-carbonate-quartz-pyrite-arsenopyrite schist or mylonite which frequently contains significant concentrations of gold, commonly as fine, free gold particles in the silicates, occluded in sulphide minerals and in solid solution in arsenopyrite. The lodes contain between 10% and 25% sulphide, the principal species being pyrite (10% to 20%) and arsenopyrite (1% to 5%). There are a series of major fault systems cutting through the Youanmi trend mineralisation that have generated some significant off-sets. The Youanmi Deeps project area is subdivided into three main areas or fault blocks by cross-cutting steep south-east trending faults; and these are named Pollard, Main, and Hill End from south to north respectively. Granite hosted gold mineralisation occurs at several sites, most notably Grace and the Plant Zone Prospects. Gold mineralization occurs as free particles within quartz-sericite altered granite shear zones. The Commonwealth-Connemarra mineralised trend is centred 4km northwest of the Youanmi plant. The geology comprises a sequence of folded mafic and felsic volcanic rocks intercalated with BIF and intruded by granite along the eastern margin. Gold mineralisation is developed over a 600m strike length, associated with a north trending and steeply west dipping shear zone that traverses the northwest trending succession.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> • <i>easting and northing of the drill hole collar</i> • <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> • <i>dip and azimuth of the hole</i> • <i>down hole length and interception depth</i> • <i>hole length.</i>	Refer to drill results Table/s and the Notes attached thereto.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	All reported assay intervals have been length weighted. No top cuts have been applied. A lower cut-off of 0.5g/t Au was applied for RC and diamond core.

JORC Table 1 - Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
	Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	Mineralisation over 0.5g/t Au has been included in aggregation of intervals for RC and diamond core.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	No metal equivalent values have been used or reported.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	The mineralisation strikes generally NNW and dips to the west at approximately -60 degrees. Drill orientations are usually 065 degrees and -60 dip. Drilling is believed to be generally perpendicular to strike. Given the angle of the drill holes and the interpreted dip of the host rocks and mineralisation (see Figures in the text), reported intercepts approximate true width.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to Figures and Table in the text.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Representative reporting of both low and high grades and widths is practiced.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All meaningful and material information has been included in the body of the announcement.
Further work	The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive	Further work (RC and diamond drilling) is justified to locate extensions to mineralisation both at depth and along strike.