

Strategic Ground Acquisition at Pharos Gold Project Old Prospect Target – Cap Lamp to Middle Bore Trend

- Scorpion has executed a binding option agreement with Ozz Resources Limited to acquire the Old Prospect tenements located within the SCN's Pharos Gold Project
- The option agreement allows consolidation of ownership along the highly prospective 5km long Cap Lamp to Middle Bore trend
- Old Prospect (North and South) have a combined JORC 2012 compliant Mineral Resource Estimate of 312,400t grading 2.15 g/t Au for 21,600 ounces contained Au
- 72% or 15,600oz is in the higher confidence Indicated Resource category
- OZZ have agreed to proceed with a mining lease application over the tenement areas during the option period whilst mining studies are advanced
- Old Prospect (North and South) drilling highlights include:
 - 8m @ 8.78 g/t Au from 41m, including 2m @ 30.8 (BWRC006)
 - 8m @ 7.98 g/t Au from 9m, including 1m @ 32.4 and 1m @ 19.9 (BWRC020)
 - 7m @ 9.10 g/t Au from 81m, including 1m @ 56.1 (21MRRC011)
 - **15m @ 2.51 g/t Au from 45m** (21MRRC003)
 - 19m @ 1.72 g/t Au from 114m, including 1m @ 21.1 (JBD001)
 - 8m @ 3.97 g/t Au from 46m, including 1m @ 20.2 (21MRRC032)
 - 15m @ 2.09 g/t Au from 26m, including 1m @ 13.8 (BWRC004)
 - **10m @ 2.48 g/t Au from 100m** (21MRRC039)
 - 18m @ 1.32 g/t Au from 28m (21MRRC011)
 - 4m @ 5.48 g/t Au from 8m, including 1m @ 12.8 (BWRC005)
- Mineralisation remains open north-south along strike and at depth down dip/plunge
- Regional prospect drilling highlights include:
 - 6m @ 12.44 g/t Au from 70m, including 2m @ 33.9 (GRC001) Maguires
 - 6m @ 6.98 g/t Au from 9m, including 1m @ 22.8 (CLRC009) Cap Lamp
 - 8m @10.99 g/t Au from 44m, including 1m @ 76.0 (WLR033) Lantern
 - 8m @ 7.33 g/t Au from 3m, including 3m @ 18.0 (LTRC004) Lantern
 - 14m @ 3.51 g/t Au from 0m, including 2m @ 16.8 (WOR006) Lantern
 - 18m @ 1.49 g/t Au from 18m (JB1050) Middle Bore
- Follow-up drilling campaign has been designed to <u>infill and extend existing drilling</u>
 along a 650-metre-long zone at Old Prospect North, South and down dip/plunge
- <u>Scorpion has built the largest landholding along the Dalgaranga–Big Bell shear</u> <u>corridor</u> which remains largely untested by historic exploration
- Strategic MOU agreement recently signed with Gylden Resources Pty Ltd current owner of the Kirkalocka Project and 2.1Mtpa CIL processing plant provides a development and processing option for Old Prospect

BOARD OF DIRECTORS

Mr Michael Kitney
Non-Executive Chairman

Ms Kate Stoney
Executive Director Finance, Joint Company
Secretary

Mr Peter Koller
Non-Executive Director

MANAGEMENT

Mr Michael Fotios
Chief Executive Officer

Mr Josh Merriman

Joint Company Secretary

SCORPION MINERALS LIMITED

ABN 40 115 535 030 Level 2, 50 Kings Park Rd West Perth WA 6005

T: +61 8 6241 1877 **F**: +61 8 6241 1811

Scorpion Minerals Limited (ASX:SCN) ("Scorpion", "SCN" or "the Company") is pleased to announce that it has executed a binding option agreement (Agreement) with Ozz Resources Limited (ACN 643 844 544) (ASX: OZZ) (OZZ).

Under the Agreement, SCN has secured an exclusive option to acquire 100% interest in each of the Tenements (P20/2318 and PLA20/2516) and Mining Information (Assets) (Option). The tenements – collectively known as Old Prospect – are located in Scorpion's *Pharos Gold Project* located northwest of Cue in the Murchison region of Western Australia ("Pharos") (Figures 1 and 13).

Pharos and the adjacent Jungar Flats JV Project (1600km²) cover the northern extent of the highly prospective Big Bell–Dalgaranga shear corridor (Figure 1).

Commenting on the strategic Old Prospect tenements, CEO Michael Fotios said: "Scorpion is delighted to have secured the opportunity to acquire the highly strategic Old Prospect gold tenements – further cementing our position as one of the leading gold explorers in the Murchison region of WA.

The Old Prospect tenements are located within our existing Pharos Gold Project, providing us with an established resource base and complete access to this highly prospective area. Furthermore, historical drilling has demonstrated the high-grade nature of the mineralisation within this footprint, and we are excited to launch a targeted exploration campaign across this area early next year.

The Old Prospect agreement with OZZ further supports our recent collaboration with Gylden Resources which, amongst other things, will provide Scorpion with access to the Kirkalocka plant; a valuable future processing solution for Scorpion."

Old Prospect Historic Exploration Summary

The Old Prospect and Maguires workings are located on or adjacent to a series of sub parallel NNW and NW trending second order structural splays located to the west of the regional Dalgaranga-Big Bell Shear corridor (Figure 3). Old Prospect mineralisation extends over at least 650 metres of strike and is located within a 5km long zone of mineralisation extending from Cap Lamp to Middle Bore that is open along strike to the north and south (Figure 4).

Historic exploration was completed by BHP, Posgold and OZZ consisting of RAB, Reverse Circulation (RC) and Diamond drilling (Figures 4 to 13, Tables 2 and 3). Significant intercepts include:

Old Prospect (North and South) Highlights:

- 8m @ 8.78 g/t Au from 41m, including 2m @ 30.8 (BWRC006)
- 8m @ 7.98 q/t Au from 9m, including 1m @ 32.4 and 1m @ 19.9 (BWRC020)
- 7m @ 9.10 g/t Au from 81m, including 1m @ 56.1 (21MRRC011)
- 15m @ 2.51 g/t Au from 45m (21MRRC003)
- 19m @ 1.72 g/t Au from 114m, including 1m @ 21.1 (JBD001)
- 8m @ 3.97 g/t Au from 46m, including 1m @ 20.2 (21MRRC032)
- 15m @ 2.09 g/t Au from 26m, including 1m @ 13.8 (BWRC004)
- 10m @ 2.48 g/t Au from 100m (21MRRC039)
- 18m @ 1.32 g/t Au from 28m (21MRRC011)
- 4m @ 5.48 g/t Au from 8m, including 1m @ 12.8 (BWRC005)

Gold mineralisation across the project (e.g. Ulysses, Olivers Patch and Candle/Lantern) appears to be hosted within or adjacent to second and third order splays off the main Dalgaranga-Big Bell Shear corridor in several different orientations (Figure 2). There are a number of these prospective splays in the Pharos project area that require further detailed evaluation. Within the OZZ tenements the Maguires prospect has returned high grade drill intercepts and requires further evaluation (Figure 3). Significant regional results include:

Regional Prospects Highlights:

- 6m @ 12.44 g/t Au from 70m, including 2m @ 33.9 (GRC001) Maguires
- 6m @ 6.98 g/t Au from 9m, including 1m @ 22.8 (CLRC009) Cap Lamp
- 8m @10.99 g/t Au from 44m, including 1m @ 76.0 (WLR033) Lantern
- 8m @ 7.33 g/t Au from 3m, including 3m @ 18.0 (LTRC004) Lantern
- 14m @ 3.51 g/t Au from 0m, including 2m @ 16.8 (WOR006) Lantern
- 18m @ 1.49 g/t Au from 18m (JB1050) Middle Bore

OZZ announced a maiden JORC 2012 Code reportable Indicated and Inferred Mineral Resource Estimate (MRE) for Old Prospect North and South on 19 November 2021 (Table 1). The MRE is based on 4,300m of RC drilling program completed by OZZ. OZZ subsequently announced the results of a Mining Scoping Study on 9 April 2024.

Table 1: Old Prospect Mineral Resource Estimate (MRE)

Location	Classification	Tonnes (t)	Gold Grade (g/t)	Gold Ounces (oz)
	Indicated	149,879	1.91	9,214
Old Prospect North	Inferred	62,637	2.46	4,961
	Total	212,516	2.07	14,175
	Indicated	79,429	2.50	6,385
Old Prospect South	Inferred	20,234	1.65	1,075
	Total	99,663	2.33	7,459
	Indicated	229,308	2.12	15,599
Total	Inferred	82,871	2.27	6,036
	Total	312,395	2.15	21,632
As reported by Ozz Resources to the ASX	19/11/2021, 0.9 g/t cut-of	f		

Future development activities at Old Prospect will focus on Infill Drilling, flora and fauna studies, updated resource estimation and scoping study, feasibility studies along with mining lease application.

The entire Cap Lamp to Middle Bore trend is highly prospective and relatively lightly explored where wide space reconnaissance drilling at Middle Bore has intersected significant mineralisation 130 metres below the surface in diamond drilling that has never been followed up. Consolidation of the tenure in this trend allows systematic exploration to commence.

Summary of Transaction Terms

A summary of the key terms of the Option Agreement is as follows:

- (i) (Option Fee): the Company agrees to pay OZZ an option fee of \$100,000
- (ii) (**Option Period**): OZZ will grant to the Company an option for a period of one (1) year from the date of the Option Agreement

- (iii) (Conditions Precedent) the exercise of the Option is subject to satisfaction/waiver of the following conditions precedents:
 - a. completion of legal and technical due diligence to the satisfaction of the Company; and
 - b. the Parties obtaining all necessary regulatory, shareholder and third party consents and/or approvals to allow the Parties to lawfully complete the Proposed Transaction
- (iv) (**Consideration**): on exercise of the Option, the Company agrees to pay to OZZ (or it's nominees) the fee of \$2,500,000 (plus GST) either:
 - a. as a cash payment, or
 - b. as fully paid ordinary shares in the Company (**SCN Shares**) (subject to prior Shareholder approval) at a deemed issue price equal to the higher of \$0.03 per SCN Share, or the 5 day trading VWAP of SCN Shares as traded on ASX immediately prior to the date of exercise of the Option, at the Company's election.
- (v) (Royalty): on completion of the Acquisition, if the Company commences mining and processing of ore on the Tenements, OZZ will be entitled to receive a quarterly payment equivalent 1% of gold produced and sold during the quarter, to be paid within 30 days after the end of each quarter.

Planned Exploration

07/11/2010

Exploration work will recommence across Scorpion's tenements early in the January quarter, the key areas of focus will include:

- Infill and extension RC drilling at Old Prospect
- Definition of an Exploration Target
- Mining studies and an application to convert Old Prospect tenements to a mining lease
- Diamond drilling to test the mineralisation down plunge at depth and collect material for geotechnical/metallurgical assessment/test work.
- Follow-up RC drilling of selected regional targets approx. 1500 metres
- Detailed (1:5000 scale) geological mapping
- 50m line spaced Airborne Magnetic Survey
- Detailed lithostructural Interpretation utilising detailed mapping and air magnetics

Ontion to Acquire Gold and Base Metal Projects

Technical information included in this announcement regarding gold exploration at Pharos has previously been provided to the market in releases dated:

07/11/2019	Option to Acquire Gold and Base Metal Projects
15/01/2020	Pharos Gold and Base Metal Project Update
23/01/2020	Grant of Pharos project Tenement
13/02/2020	New Gold Targets Discovered at Pharos Project
12/03/2020	Tenement Acquisitions Build Pharos Project
25/06/2020	Pharos Project Exploration Update
09/07/2020	High Grade Gold Rock Chips - Pharos Project
13/08/2020	Drilling to Commence – Pharos Project
31/08/2020	Commencement of Drilling - Pharos Project
28/09/2020	High Grade Gold Confirmed at Lantern - Pharos Project
24/11/2020	Further High-Grade Gold Results – Pharos Project
23/06/2021	Multiple Commodity Targets Identified at Pharos
12/08/2021	RC Drilling Commences at Pharos Gold Targets
23/08/2021	Completion of Drilling at Pharos Gold Targets
20/10/2021	New Shallow High-Grade Gold Zone Confirmed at Cap Lamp
06/12/2021	Scorpion increase Murchison Footprint
07/02/2022	Scorpion Acquires Poona Project

Poona Tech Review Highlights Multiple PGE-Ni-Cu & Au Targets
Investor Presentation
Investor Presentation
Specimen Gold Discovered at Olivers Patch
Pharos High-Grade Gold Target Review Underway
Specimen Gold Distribution Confirmed at Olivers Patch
Murchison Gold JV
Presentation – Murchison Gold Strategy
RC Drilling to Commence at Pharos Gold Project
Murchison Gold Targets
Pre-drilling Exploration Work Complete
Drilling Rig Mobilised to Pharos Gold Project
RC Drilling Completed – Pharos Gold Project
Exploration Update – Pharos Gold Project Murchison
Shallow High-Grade at Pharos and Strategic Partnership

This announcement has been authorised by the board of directors of the Company.

-ENDS-

Enquiries

For more information, please contact:

Michael Fotios Chief Executive Officer T +61 (0) 8 6241 1877

info@scorpionminerals.com.au

Sam Burns
Six Degrees Investor Relations
T +61 (0) 400 164 067

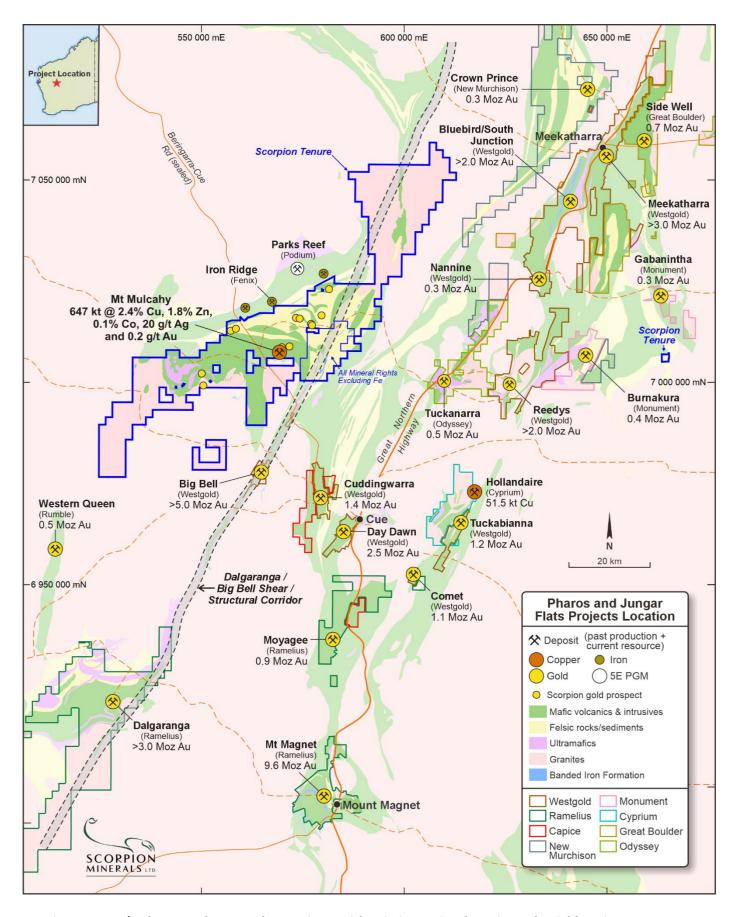


Figure 1: SCN's Pharos and Jungar Flats Projects with existing major deposits and neighbouring tenures

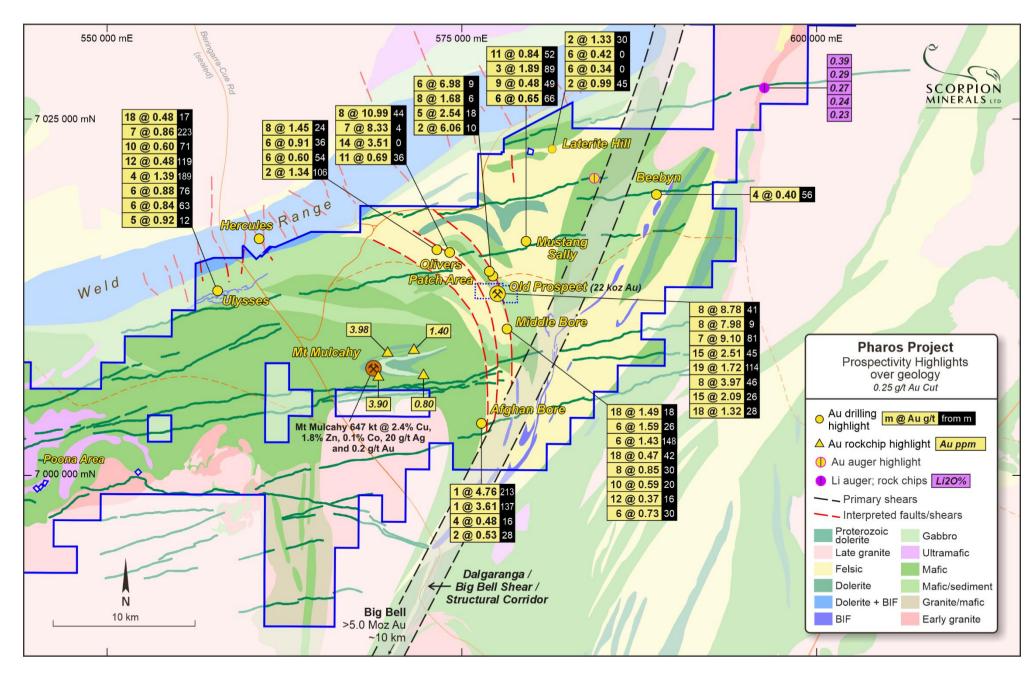


Figure 2: Olivers Patch, Cap Lamp and Middle Bore prospect areas, prospective second order splays with previous drilling and rock chip highlights

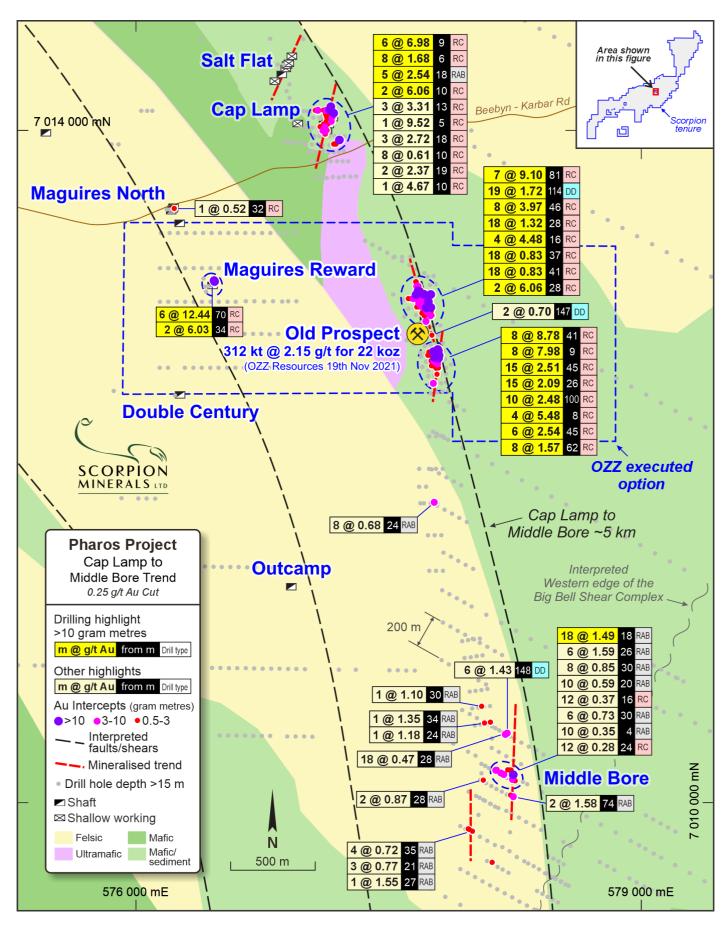


Figure 3: Cap Lamp to Middle Bore Overview highlighting Old Prospect RC drilling results within 5km long structural corridor

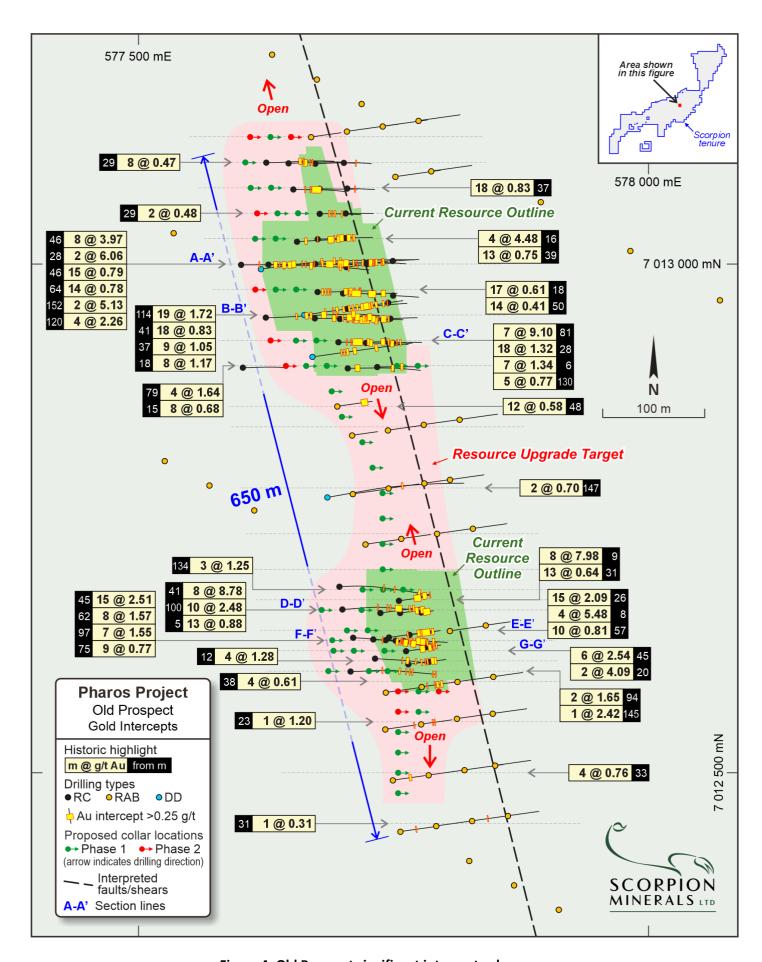


Figure 4: Old Prospect significant intercepts plan

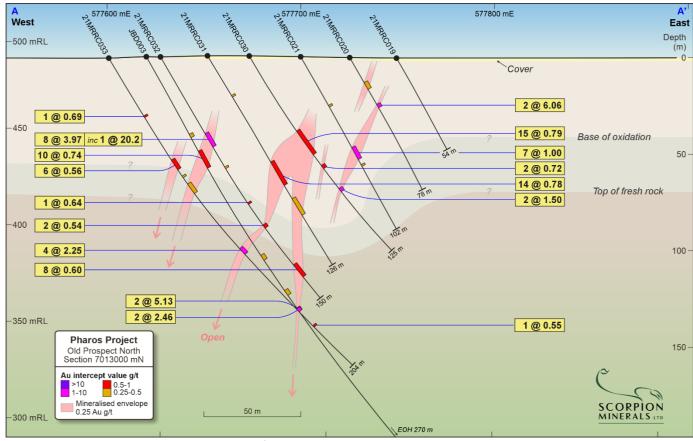


Figure 5: Old Prospect North Section A - A'

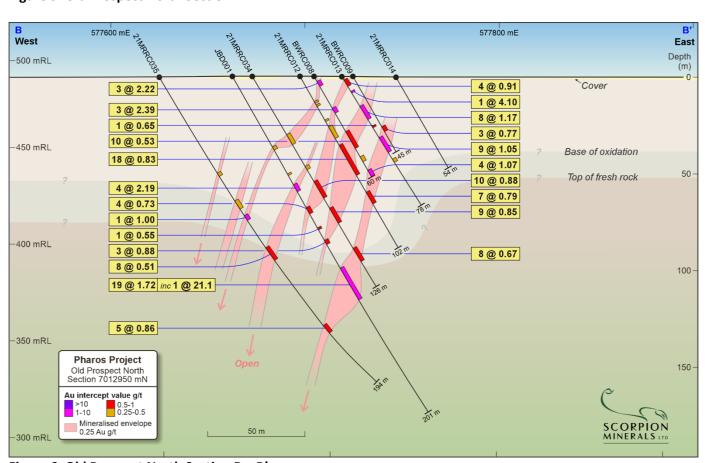


Figure 6: Old Prospect North Section B – B'

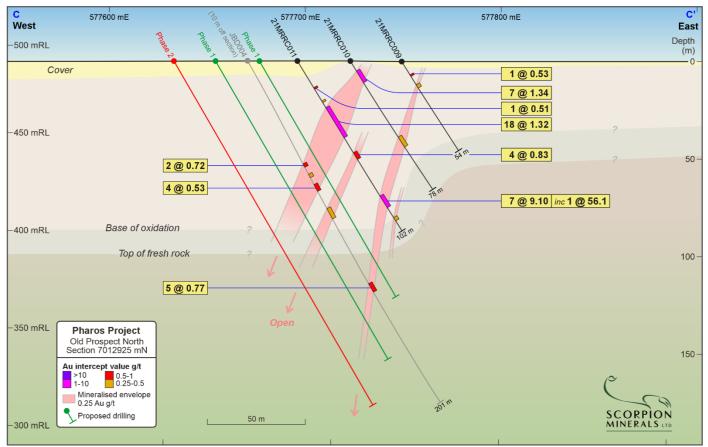


Figure 7: Old Prospect North Section C – C'

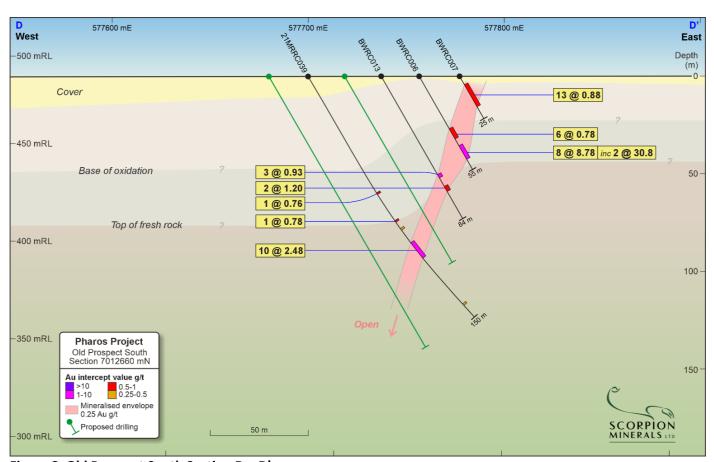


Figure 8: Old Prospect South Section D - D'

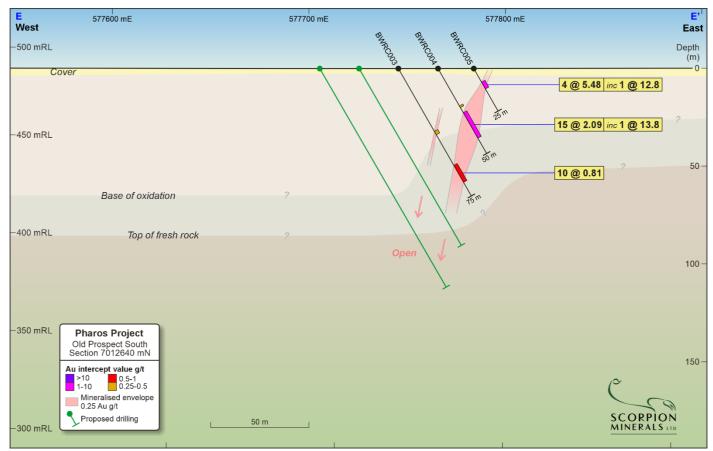


Figure 9: Old Prospect South Section E – E'

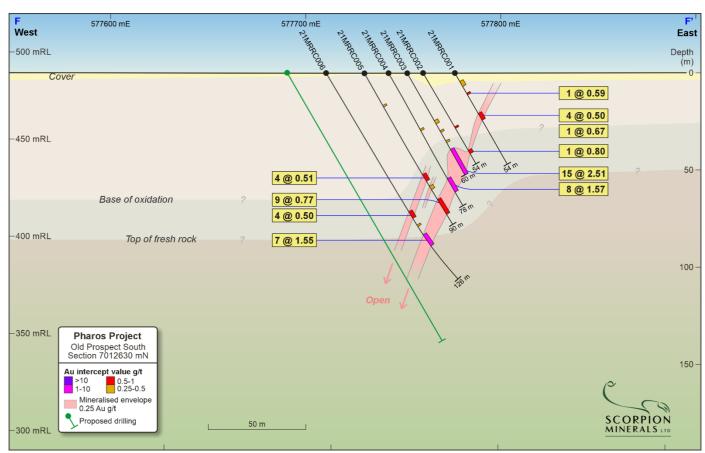


Figure 10: Old Prospect South Section F - F'

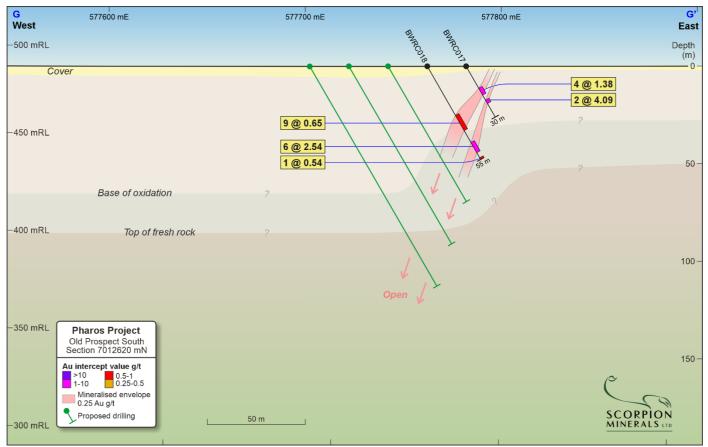


Figure 11: Old Prospect South Section G - G'

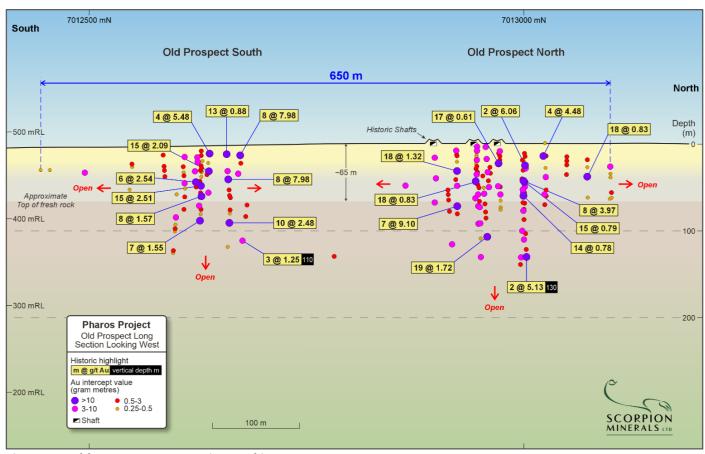


Figure 12: Old Prospect Long Section Looking West

About Scorpion Minerals Limited

Scorpion Minerals Limited (ASX:SCN) is an Australian mineral exploration and resource development company with a focus on creating wealth for shareholders through the discovery of world-class deposits, over a diversified range of minerals. Our current efforts are centred on our Pharos Projects, located in the Murchison Province of Western Australia.

The Pharos Project

The Pharos Project consists of 924 square kilometres of granted tenure, located approximately 50 km northwest of the small mining town of Cue in the Murchison Mineral Field. The project is easily accessible from the Great Northern Highway by the sealed Jack Hills Mine access road and then by unsealed tracks. Scorpion holds a 100% interest in the project.

The project is prospective for gold, lithium, PGE-Ni-Cu, iron ore, and VMS hosted Cu-Zn-Ag Au mineralisation, and contains the Mt Mulcahy deposit. The 'South Limb Pod' zone of mineralisation at Mt Mulcahy contains a JORC 2012 Measured, Indicated and Inferred Resource of 647,000 tonnes @ 2.4% copper, 1.8% zinc, 0.1% cobalt and 20g/t Ag (refer Table 3).

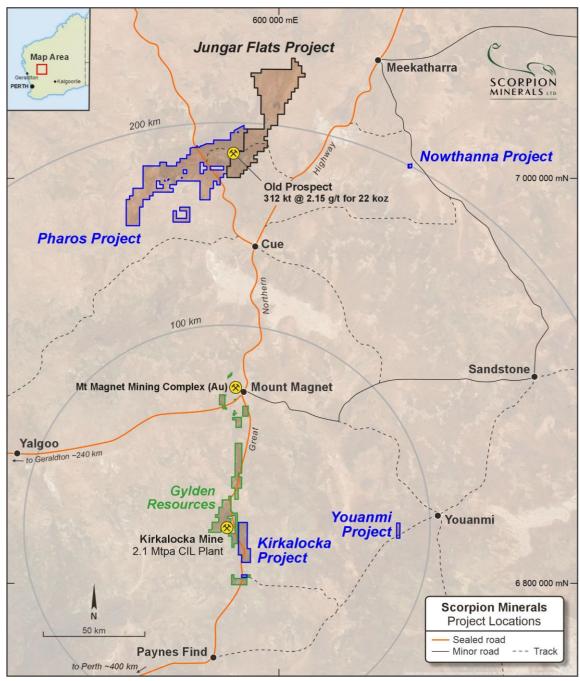


Figure 13: Murchison tenement location plan

Table 2: Old Prospect Results, Composite Au >= 0.25 g/t

Hole ID	East	North	RL	Dip	Azimuth	Depth	From	То	Length	Au g/t	Drill Type
Old Prospect No		North	NL .	Dip	Azimutn	Deptili	FIOIII	10	Length	Au g/t	Drill Type
21MRRC008	577734	7012899	487	-60	90	78	45	49	4	0.77	RC
21MRRC009	577749	7012923	486	-60	90	54	8	9	1	0.53	
							14	16	2	0.40	RC
21MRRC010	577723	7012922	487	-60	90	78	6	13	7	1.34	RC
							46	52	6	0.35	RC.
21MRRC011	577696	7012923	487	-60	90	102	16	17	1	0.51	
							24	25	1	0.25	
							28	46	18	1.32	
							55	59	4	0.83	RC
						in aludin a	81 83	88 84	7	9.10 56.10	
						including	94	96	2	0.42	
21MRRC012	577697	7012946	487	-60	90	102	15	16	1	0.42	
22	377037	70123.0	.07	00	30	102	17	18	1	0.25	
							26	27	1	0.33	
							30	37	7	0.39	RC
							41	59	18	0.83	
							69	76	7	0.79	
21MRRC013	577719	7012946	487	-60	90	78	2	6	4	0.91	
							9	10	1	4.10	
							18	26	8	1.17	RC
							30	31	1	0.65	
							37	46	9	1.05	
21MRRC015	F77676	7012072	487	-60	90	102	50 9	52	2	0.30	
21WKKC015	577676	7012973	487	-60	90	102	16	12 18	3 2	1.51 0.64	
							21	23	2	0.64	-
							26	27	1	0.46	
							54	61	7	0.41	RC
							64	71	7	0.59	1
							75	76	1	0.44	
							84	85	1	0.29	
							87	88	1	0.27	
21MRRC016	577701	7012971	487	-60	90	78	12	14	2	0.57	
							18	35	17	0.61	RC
							50	64	14	0.41	
21MRRC017	577727	7012971	487	-60	90	54	22	30	8	0.62	RC
21MRRC020	577725	7013002	487	-60	90	78	15	19	4	0.35	RC
21MRRC021	577700	7013001	487	-60	90	102	28 29	30 30	2 1	6.06 0.31	
ZIIVIRRCUZI	377700	7013001	467	-00	90	102	54	61	7	1.00	RC
							64	65	1	0.26	
21MRRC022	577703	7013025	487	-60	90	54	15	19	4	0.55	RC
21MRRC023	577676	7013024	488	-60	90	78	0	1	1	0.40	
							33	34	1	0.37	
							39	52	13	0.75	RC
							59	66	7	0.35	
							70	71	1	0.57	
21MRRC025	577678	7013049	488	-60	90	78	18	20	2	0.37	
							24	25	1	0.52	RC
							29	31	2	0.48	
2414000027	F77670	7012074	400	60	00	70	42	44	2	0.31	D.C.
21MRRC027 21MRRC028	577678 577652	7013074 7013073	488 488	-60 -60	90 90	78 102	72 23	73 24	1	0.33 1.55	RC
211/11/11/11/12/28	377032	7013073	488	-00	30	102	33	34	1	0.30	RC
							37	55	18	0.83	· · · · · ·
21MRRC029	577655	7013022	488	-60	90	102	16	20	4	4.48	
						including	17	18	1	16.00	
							63	74	11	0.49	RC
							80	85	5	0.28	
21MRRC030	577673	7013000	487	-60	90	125	46	61	15	0.79	
							68	70	2	0.73	RC
							83	85	2	1.50	
21MRRC031	577652	7013000	488	-60	90	126	24	25	1	0.26	
							64	78	14	0.78	RC
2414000000	F77607	7042222	407			450	86	96	10	0.33	
21MRRC032	577627	7012999	487	-60	90	150	46	54	8	3.97	
						including	49	50	1	20.20	
							66	67	1	0.37	RC
							88 102	89 104	2	0.64 0.54	
							102	104		0.54	
							178	136	8	0.60	
21MRRC033	577601	7012999	486	-60	90	204	128 35	136 36	8	0.60 0.69	RC

Hole ID	East	North	RL	Dip	Azimuth	Depth	From	То	Length	Au g/t	Drill Type
1101012	2000	11011		p	7 (2.11)	Jopan.	72	73	1	0.30	J , p G
							77	83	6	0.40	
							120	124	4	2.26	
							163	165	2	2.47	
							175	176	1	0.55	
21MRRC034	577673	7012947	487	-60	90	126	35	41	6	0.25	
							54	56	2	0.29	
							63	73	10	0.88	RC
							79	88	9	0.85	
							103	111	8	0.67	
21MRRC035	577625	7012947	486	-60	90	194	58	60	2	0.29	
							75	80	5	0.27	
							84	87	3	1.00	RC
							104	112	8	0.51	
							129	130	1	0.26	
2114000027	F7770F	7012007	407	60	00	126	154	159	5	0.86	
21MRRC037	577705	7012897	487	-60	90	126	15	23	8	0.68 1.64	RC
21MRRC042	577673	7013099	488	-60	90	78	79 76	83 77	1	0.28	RC
21MRRC042	577647	7013099	489	-60	90	102	29	37	8	0.28	NC .
ZIWINNC043	377047	7013033	463	-00	90	102	42	43	1	0.47	RC
							47	48	1	0.45	i.c
21MRRC044	577625	7013100	489	-60	90	126	65	70	5	0.30	
211111111111111111111111111111111111111	377023	7013100	403	00	30	120	74	75	1	0.30	RC
BWRC008	577705	7012956	487	-60	82	60	3	6	3	2.22	
	2				J-		19	22	3	2.39	
							33	43	10	0.53	RC
							48	51	3	0.40	
							56	60	4	1.07	
BWRC009	577725	7012959	487	-60	82	45	30	33	3	0.77	RC
							39	40	1	2.61	RC
BWRC011	577704	7012997	487	-60	82	80	22	23	1	0.57	D.C.
							69	70	1	0.34	RC
BWRC012	577724	7013000	487	-60	82	60	13	14	1	0.83	RC
							32	35	3	1.01	NC NC
JB1027	577695	7012860	485	-60	82	70	48	60	12	0.58	RAB
JBD001	577663	7012950	487	-60	82	201	42	44	2	0.30	
							58	59	1	0.37	RC
							64	69	4	2.19	
							78	82	4	0.73	
							90	91	1	0.55	
							97	100	3	0.87	DD
					ı	in almalia a	114	133	19	1.72	
JBD003	577620	7012995	487	-60	82	<i>including</i> 270	127 46	128 48	1 2	21.10	
180003	577620	7012995	467	-60	82	270	56	66	10	0.28	RC
							119	122	3	0.74	
							141	144	3	0.28	DD
							152	154	2	5.13	DD
JBD004	577671	7012909	487	-60	82	201	60	62	2	0.72	
355004	377071	7012303	407	00	02	201	66	68	2	0.33	
							72	76	4	0.53	RC
							86	92	6	0.26	
							130	135	5	0.77	DD
Between Old Pr	rospect North	and South									
JBD006	577685	7012771	484	-60	80	250	147	149	2	0.70	DD
Old Prospect So											
21MRRC001	577776	7012629	484	-60	90	54	5	8	3	0.25	
							12	13	1	0.59	RC
							24	28	4	0.50	
21MRRC002	577760	7012629	484	-60	90	54	32	33	1	0.67	
							46	48	2	0.80	RC
21MRRC003	577752	7012630	484	-60	90	60	28	30	2	0.41	
							34	35	1	0.25	DC.
							40	41	1	0.48	RC
							45	60	15	2.51	
21MRRC004	577742	7012630	484	-60	90	78	33	34	1	0.37	RC
1							62	70	8	1.57	nC nC
		7012631	484	-60	90	90	19	20	1	0.25	
21MRRC005	577730						60	64	4	0.51	RC
21MRRC005	577730										
21MRRC005	577730						67	69	2	0.40	i.e
							75	84	9	0.77	ille ille
21MRRC005 21MRRC006	577730	7012633	484	-60	90	126	75 83	84 87	9 4	0.77 0.50	
		7012633	484	-60	90	126	75 83 91	84 87 92	9 4 1	0.77 0.50 0.39	RC
21MRRC006	577710						75 83 91 97	84 87 92 104	9 4 1 7	0.77 0.50 0.39 1.55	
		7012633 7012612	484	-60 -60	90	126	75 83 91	84 87 92	9 4 1	0.77 0.50 0.39	

Hole ID	East	North	RL	Dip	Azimuth	Depth	From	То	Length	Au g/t	Drill Type
							82	84	2	0.52	
21MRRC038	577708	7012600	483	-60	90	150	63	64	1	0.45	
							94	96	2	1.65	
							105	106	1	0.40	
							111	112	1	0.80	RC
							115	116	1	0.28	
							145	146	1	2.42	
							149	150	1	0.46	
21MRRC039	577700	7012660	484	-60	90	150	69	70	1	0.76	
							86	87	1	0.78	
							91	92	1	0.28	RC
							100	110	10	2.48	
							141	142	1	0.35	
21MRRC040	577697	7012683	484	-60	90	150	81	82	1	0.52	
							98	99	1	0.53	RC
							134	137	3	1.25	
BWRC001	577764	7012606	483	-60	82	55	26	28	2	0.94	
							34	35	1	0.41	RC
							38	40	2	1.03	
DIMEGOOO	F7770F	7042500	402		02	25	46	52	6	0.51	B.C
BWRC002	577785 577746	7012609	483 484	-60 -60	82 82	35 75	12	16	4	1.28	RC
BWRC003	5///46	7012633	484	-60	82	/5	37	39 67	2	0.38 0.81	RC
BWRC004	577766	7012635	484	-60	82	50	57	23	10 1	0.46	
BWKC004	5///66	7012635	484	-60	82	50	22	41	15	2.09	RC
						including	26	37	1	13.80	RC.
BWRC005	577784	7012638	484	-60	82	25	<i>36</i> 8	12	4	5.48	
BWKCOOS	3///64	7012036	404	-00	02	including	9	10	1	12.80	RC
BWRC006	577756	7012657	484	-60	82	55	31	37	6	0.78	
DWINCOOD	377730	7012037	404	00	02	33	41	49	8	8.78	RC
						including	43	45	2	30.75	
BWRC007	577777	7012657	484	-60	82	25	5	18	13	0.88	RC
BWRC013	577737	7012657	484	-60	82	84	58	60	2	1.20	
							65	68	3	0.93	RC
BWRC017	577782	7012623	484	-60	82	30	13	17	4	1.38	
							20	22	2	4.09	RC
BWRC018	577762	7012619	484	-60	82	55	29	38	9	0.65	
							45	51	6	2.54	RC
							54	55	1	0.54	
BWRC019	577755	7012669	484	-60	82	55	31	44	13	0.64	RC
BWRC020	577774	7012673	484	-60	82	25	9	17	8	7.98	
						including	13	14	1	32.40	RC
						including	15	16	1	19.90	NC.
							23	24	1	0.99	
OP9450-2	577827	7012453	483	-60	82	66	31	32	1	0.31	RAB
OP9450-4	577757	7012442	483	-60	82	66	31	32	1	0.30	RAB
OP9500-4	577750	7012493	483	-60	82	64	33	37	4	0.76	RAB
OP9550-3	577777	7012548	483	-60	82	62	23	24	1	1.20	RAB
							27	28	1	0.43	
OP9550-4	577742	7012543	483	-60	82	62	57	58	1	0.37	RAB
OP9600-3	577778	7012584	483	-60	82	68	11	12	1	1.60	
							26	27	1	1.25	RAB
							30	34	4	0.48	
							38	42	4	0.61	

Notes

No upper cut applied, 0.25 g/t lower cut, allowing 2m internal waste Coordinate system GDA94z50

Table 3: Regional Prospects Results, Composite Au >= 0.25 g/t Au

Prospect	Hole ID	East	North	RL	Dip	Azi	Depth	From	То	Length	Au g/t	Drill Type
	AR108	576177	7003084	500	-90	0	32	16	20	4	0.48	RAB
Afghan Bore	ARD002	576261	7003038	500	-50	300	201	137	138	1	3.61	DD
Algilali Bore	MW10	576256	7003955	500	-90	0	32	28	30	2	0.53	RAB
	MWD002	576500	7003820	500	-50	300	219	212	213	1	4.76	DD
Beebyn	BR-8	588694	7019740	500	-90	0	68	56	60	4	0.40	RAB
Candle	CNRC002	573284	7015720	491	-70	90	108	106	108	2	1.34	RC
	CNRC009	573298	7016078	488	-60	270	100	54	60	6	0.60	RC
Candle North	CNRC013	573239	7016110	487	-55	180	60	36	42	6	0.91	RC
	WOR008	573243	7016072	488	-60	0	32	24	32	8	1.45	RAB
	25PRC004	577143	7014099	490	-60	90	79	10	18	8	0.61	RC
Cap Lamp	25PRC005	577159	7014080	490	-60	90	43	6	14	8	1.68	RC
	25PRC016	577117	7014022	488	-60	90	37	13	16	3	3.31	RC

	25PRC018 CLRC005 CLRC006	577120	7014001									Type
				488	-60	90	37	10	11	1	4.67	RC
	CLBCOOK	577120	7014119	489	-60	90	66	18	21	3	2.72	RC
		577079 577099	7014120 7014000	487	-60	90	80	5	6	1	9.52	RC
	CLRC008 CLRC009	577099	7014000	487 489	-50 -50	90 90	60 30	19 9	21 15	2 6	2.37 6.98	RC
_	CLICOUS	377139	7014119	403	-30		cluding	9	10	1	22.88	RC
	CLRC012	577134	7014099	489	-55	90	30	10	12	2	6.06	
							cluding	10	11	1	11.76	RC
	OP 102-1	577187	7013921	489	-60	90	49	18	23	5	2.54	RAB
	LTRC004	574146	7015642	497	-55	90	60	3	11	8	7.33	RC
_							cluding	4	7	3	18.04	
	WLR001	574162	7015641	497	-60	315	59	36	47	11	0.69	RAB
Lantern	WLR033	574146	7015673	496	-60	270	94	44	52 <i>47</i>	8	10.99	RAB
	WOR006	574166	7015633	497	-60	0	<mark>cluding</mark> 27	46 0	14	14	76.00 3.51	
	WOROOO	374100	7013033	437	-00		cluding	8	10	2	16.80	RAB
	LHRC001	581272	7022855	500	-60	180	149	0	6	6	0.34	RC
	LWL100-4	581269	7022937	500	-60	164	55	30	32	2	1.33	RAB
Laterite Hill	LWL104-1	581707	7022853	500	-60	164	73	0	6	6	0.42	RAB
	LWL104-2	581693	7022901	500	-60	164	56	45	47	2	0.99	RAB
	BWRC015	576438	7013078	480	-60	90	60	34	36	2	6.03	RC
Maguires							cluding	34	35	1	11.10	110
	GRC001	576418	7013078	480	-60	80	90	70	76	6	12.44	RC
Manufac						inc	cluding	70	72	2	33.90	
Maguires North	MNRC001	576208	7013536	486	-50	90	40	32	33	1	0.52	RC
NOTH	JB0387	578234	7010141	500	-90	0	30	14	20	6	0.49	RAB
	JB0412	578243	7010141	500	-60	120	40	14	18	4	0.70	
								22	24	2	0.67	RAB
	JB0413	578225	7010146	500	-60	120	42	20	30	10	0.59	RAB
	JB0414	578243	7010136	500	-90	120	42	4	14	10	0.35	RAB
	JB0417	578173	7010175	500	-60	120	44	26	32	6	1.59	RAB
	JB0418	578155	7010184	500	-60	120	42	24	26	2	0.51	RAB
_								30	36	6	0.73	
	JB0420	578124	7010201	500	-60	120	42	22	24	2	0.77	RAB
_	ID1041	F7010 <i>C</i>	7010425	500		120	62	30 42	38 60	8 18	0.85 0.47	RAB
	JB1041 JB1050	578186 578230	7010423	500	-60 -90	0	64	18	36	18	1.49	RAB
	JBD002	578230	7010143	500	-60	90	82	16	28	12	0.37	RC
Middle Bore	JBD002A	578140	7010196	500	-60	90	270	24	36	12	0.28	RC
								148	149	1	1.20	
								189	190	1	0.76	DD
	JBD005	578121	7010388	500	-60	75	198	148	154	6	1.43	DD
	JBD007	578059	7010180	500	-60	75	231	162	171	9	0.29	DD
	RSF196-11	577964	7009850	500	-60	120	95	21	24	3	0.77	
								27	28	1	1.55	RAB
_	RSF199-1	F70210	7010054	500	-60	120	77	35 74	39 76	4 2	0.72	RAB
	RSF199-6	578210 578052	7010034	500	-60	120	89	28	30	2	1.58 0.87	RAB
	SR750-2	578094	7010141	500	-60	82	76	24	25	1	1.18	RAB
	SR750-3	578054	7010477	500	-60	82	70	30	31	1	1.10	
								34	35	1	1.35	RAB
Middle Bore North	WTR08	577757	7011787	477	-60	90	38	24	32	8	0.68	RAB
	JB0338	579834	7015654	500	-90	0	86	66	72	6	0.65	RAB
Mustang Sally	MS256-4	579855	7015661	500	-60	120	102	89	92	3	1.89	RAB
iviustalig sally	MS263-1	579816	7016499	500	-60	120	74	49	58	9	0.48	RAB
	MS264-5	579741	7016655	500	-60	120	89	52	63	11	0.84	RAB
	97UERB048	557782	7013014	464	-90	0	17	12	17	5	0.92	RAB
	97UERB073	556139	7012245	471	-60	340	72	17	35	18	0.48	RAB
	97UERC015	557786	7012957	464 461	-60 -60	340	169	63	69	6	0.84	RC RC
Ulysses	97UERC017 97UERC019	558507 558122	7012933 7012964	461	-60 -60	340 340	154 123	119 71	131 81	12 10	0.48	RC RC
	RYP99-003	557595	7012964	465	-60	160	103	76	82	6	0.88	RC RC
	UEC002	558392	7012937	462	-55	160	294	223	230	7	0.86	DD
	UERC025	558552	7013106	461	-55	162	214	189	193	4	1.39	RC

Notes

No upper cut applied, 0.25 g/t lower cut, allowing 2m internal waste Coordinate system GDA94z50

Table 4: Current Mineral Resource Estimate, Mt Mulcahy Project

(refer ASX release 25/9/2014 "Maiden Copper - Zinc Resource at Mt Mulcahy", which also contains a list of significant drill intersections for the deposit, listed within that report at Table 2)

	Mt Mulcahy South Limb Pod Mineral Resource Estimate										
Resource	source Grade Contained Metal										
Category	Tonnes	Cu (%)	Zn (%)	Co (%)	Ag (g/t)	Au (g/t)	Cu (t)	Zn (t)	Co (t)	Ag (oz)	Au (oz)
Measured	193,000	3.0	2.3	0.1	25	0.3	5,800	4,400	220	157,000	2,000
Indicated	372,000	2.2	1.7	0.1	19	0.2	8,200	6,300	330	223,000	2,000
Inferred	82,000	1.5	1.3	0.1	13	0.2	1,200	1,100	60	35,000	
TOTAL	647,000	2.4	1.8	0.1	20	0.2	15,200	11,800	610	415,000	4,000

Competent Persons Statement 1

The information in this report that relates to the Exploration Results and Mineral Resources at the Mt Mulcahy and Pharos Projects is based on information reviewed by Mr Michael Fotios, who is a member of the Australian Institute of Mining and Metallurgy. Mr Fotios is a consultant to Scorpion Minerals Limited and has sufficient experience which is relevant to the style of mineralisation and types of deposit under consideration and to the activity he is undertaking to qualify as Competent Persons as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code 2012)'. Mr Fotios consents to the inclusion of the information in the form and context in which it appears.

Competent Persons Statement 2

The information in this report that relates to the Mt Mulcahy Mineral Resource is based on information originally compiled by Mr Rob Spiers, an independent consultant to Scorpion Minerals Limited and a then full-time employee and Director of H&S Consultants Pty Ltd (formerly Hellman & Schofield Pty Ltd) and reviewed by Mr Fotios. This information was originally issued in the Company's ASX announcement "Maiden Copper-Zinc Resource at Mt Mulcahy", released to the ASX on 25 September 2014. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements. The company confirms that the form and context in which the findings are presented have not materially modified from the original market announcements.

Forward Looking Statements

Scorpion Minerals Limited has prepared this announcement based on information available to it. No representation or warranty, express or implied, is made as to the fairness, accuracy, completeness or correctness of the information, opinions and conclusions contained in this announcement. To the maximum extent permitted by law, none of Scorpion Minerals Limited, its Directors, employees or agents, advisers, nor any other person accepts any liability, including, without limitation, any liability arising from fault or negligence on the part of any of them or any other person, for any loss arising from the use of this announcement or its contents or otherwise arising in connection with it. This announcement is not an offer, invitation, solicitation or other recommendation with respect to the subscription for, purchase or sale of any security, and neither this announcement nor anything in it shall form the basis of any contract or commitment whatsoever.

This announcement may contain forward-looking statements that are subject to risk factors associated with exploration, mining and production businesses. It is believed that the expectations reflected in these statements are reasonable but they may be affected by a variety of variables and changes in underlying assumptions which could cause actual results or trends to differ materially, including but not limited to price fluctuations, actual demand, currency fluctuations, drilling and production results, reserve estimations, loss of market, industry competition, environmental risks, physical risks, legislative, fiscal and regulatory changes, economic and financial market conditions in various countries and regions, political risks, project delay or advancement, approvals and cost estimate.

JORC CODE, 2012 EDITION – TABLE 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	 Gold specimens/nuggets where referenced were identified by metal detector, recovered by hand positions noted, and sites rehabilitated. Scorpion Minerals Limited, 2020, 2021 and 2025, RC Drilling was undertaken as industry standard reverse circulation drilling, with 1m samples were split from the cyclone, with residual sample collected in plastic bags. OZZ Resources, 2021, (OZZ ASX Release 19/11/2021) Sampling was carried out using angled Reverse Circulation (RC) drilling, A total of 45 holes (21MRRC001-045) were drilled for a total of 4,304m at depths ranging from 54 to 200m OZZ Resources Ltd (OZZ) sampling and analysis was conducted using standard industry practices including the use of duplicates, blanks and standards at regular intervals. The performance of QAQC controls is monitored on a batch-by-batch basis. All sampling and data collection was supervised by a qualified geologist. RC holes were drilled with a 5.25-inch face-sampling bit, with 1m samples collected through a cyclone and cone splitter, to form a 2-3kg single metre sample and a bulk 25-40kg sample. The 2-3 kg composite samples were dispatched to SGS laboratories in Perth. These samples were sorted and dried by the assay laboratory, pulverised to form a 50gm charge for Fire Assay/AAS. E79 Gold Mines Limited, 2023, (E79 ASX Releases 17/5/2023, 28/9/2023) Auger drilling and rock chip sampling Auger samples were taken from 0.5-1.5m under the surface via an auger drill mounted to the back of a vehicle. Samples were analysed at 1abWest laboratories in Perth via the UltraFine+™ soils technique. Rock chip samples were selective in nature. Samples were selected to be ~750g in weight and representative of the area they were taken in, Samples were analysed at ALS laboratories in Perth via the 4-acid digest method with 49 elements analysed Scorpion Minerals Limited, Rock chip samples were collected to

- Alchemy Resources, 2010, WAMEX report a86265, Aircore (AC) drilling, 7 holes completed for 233m, samples collected as typically 4m composites and sent to KalAssay laboratories in Perth with Au analysed by method AR40 ICPMS, and bottom of hole by method AD02 SCAN for a 48 element suite.
- Hannans Reward, 2004, WAMEX report a69137, Aircore (AC) Drilling, 33 holes for 1243m, samples generally
 collected as 4m composites using a scoop. Analysis by Genalysis Perth for, Au ppb by B/ETA and As ppm, Cu
 ppm, Ni ppm, Pb ppb and Zn ppm by B/AAS. Anomalous zones further analysed by Genalysis by fire assay
 for Au ppb, Pd ppb and Pt ppb by lab method FA25/MS and by multi acid digest for AS ppm, Co ppm, Cr
 ppm, Cu ppm, Ni ppm, Pb ppm, S ppm and Zn ppm by lab method AT/OES.
- Newcrest Operations Limited, 1999, WAMEX report a59755, Aircore (AC) drilling, samples collected as 4m or 5m composites and sent to AMDEL for assaying of Au by method AA9, Aqua Regia digest and for Cu, Pb, Zn, As, NI, Co and Sb by method IC9, ICP and Aqua Regia digest
- Hampton Hill Mining NL, 1994, WAMEX report a45300, RAB drilling, samples collected as 4m composites and sent to ALS for assaying of Au by method PM209, 50g fire assay with AAS finish.
- Equinox Resources NL, 1994, WAMEX report a43716, RAB drilling, samples collected as 4m composites and sent to GENALYSIS for assaying of Au and As, by unknown method, 1m re-splits taken when Au >0.01 ppm.
- Guardian Resources Lantern Geochem 1993 WAMEX Report a37370, soil sampling was carried out on a 100m x 50m grid. -5mm fraction sampled. Samples submitted to Genalysis for Au, As and Sb.
- Newcrest Operations Limited, 1993, WAMEX reports a38052 and a40714, RAB drilling, 4m composite
 samples were collected and submitted to Genalysis Laboratory Services and analysed for Au and As by
 method B/AAS, anomalous 4m results >0.1 ppm Au were then resubmitted for 1m analysis.
- Newcrest Mining Limited, 1992, WAMEX report a35547, 188, -20# +30# stream samples collected and sent
 to Genalysis Perth for analysis. Au ppb analysed by method B/ETA. Ag, Cu, Pb and Zn analysed by acid digest
 (AAS), As, Mo, Sb, Sn and W analysed by MS.
- Guardian Resources NL, 1992, WAMEX report a37370, RAB drilling, samples collected as 4m composites and sent to GENALYSIS for assaying of Au and As by method B/AAS, 1m re-splits taken and assayed when anomalous.
- Newcrest Mining Limited Cap Lamp Geochem 1991-1993 WAMEX Report a38052, shallow vacuum drilling
 for base of hardpan sampling. Drilling was carried out a 200m x 50m grid. Average hole depth was 1m. No
 sampling information available. Samples submitted to Genalysis for Au, Cu, Zn, Pb, Ni, As, Sb and Bi.
- Newcrest Mining Limited, 1992, WAMEX report a37792, RAB drilling, drilled at 1m intervals and 4 metre
 composite samples collected, assayed by Genalysis Perth for Au and As (AAS) composite samples assayed
 >0.1 ppm Au were resubmitted at 1m intervals.
- Newcrest Mining Limited, 1991, WAMEX report a38754, RAB drilling, drilled at 2 metre intervals and 4 metre
 composite samples collected, assayed by Genalysis Perth for Au (B/ETA carbon rod) and Ni, Cu, Zn, As, Mo,
 Ag, Sb, Pb and Bi (acid digest AAS), 2m metre composite resubmitted on elevated geochemistry.
- BHP Gold Mines Limited, 1988-1989, WAMEX report a27504, RAB drilling samples were collected at 2 metre
 intervals and assayed by Pilbara Laboratories Balcatta for Au, Ni, Cu, Zn, Pb and As. Diamond drilling, RC
 pre-collars were samples at 2 metre intervals, diamond core was samples to geological contacts. RC and
 Diamond assayed by AAL for Au (fire assay) and Cu, Pb, Zn, Ag, Ni, As, Mo, W, Sb and B (various methods
 D300. D210 and D510)
- BHP Minerals Limited, 1987, WAMEX report a24612, Diamond drilling, core was sawn, or fillet sampled and analysed Resource Development Laboratories Perth for Au (fire assay Half core Aqua Regia for fillet samples) and Ni, Cu, Zn, Pb, Ag and As (AAS)
- BHP Minerals Limited, 1986, WAMEX report a21668, RAB drilling samples were collected at 2 metre intervals, select samples analysed by Resource Development Laboratories Perth for Au, Pt, and Pd (fire assay) and As, Bi, Sb, Se, Sn, Ni, Cu, Zn, Pb, Ag, Mo, Ba, B, V, Ti, Cr, Zn and W (various methods, AAS, ICP, Colorimetry) Diamond Drilling, core was sawn or fillet sampled and analysed Resource Development Laboratories Perth for Au, Pt, and Pd (fire assay Half core Aqua Regia for fillet samples) and Ni, Cu, Zn, Pb, Ag and As (AAS)

Criteria	JORC Code explanation	Commentary
		 BHP Minerals Limited, 1986, WAMEX report a20413, RAB drilling samples were collected at 2 metre intervals and assayed by Pilbara Laboratories Perth, Au (fire assay) and As, Bi, Sb, Se, Sn, Ni, Cu, Zn, Pb, Ag, Mo, Ba, B, V and W (various methods, AAS, ICP, Colorimetry), select samples analysed for Pd and Pt by Resource Development Laboratories in Balcatta by fire assay. BHP Minerals Limited, 1985, WAMEX report a18151, RAB drilling, samples were collected at 2 metre intervals and assayed by Pilbara Laboratories Perth, Au (fire assay) and As, Ni, Cr, Cu, Co, Ti, Zr, V and B (various methods AAS, ICP) CRA Exploration Ltd, 1983, WAMEX report a16051, Reverse Circulation (RC) drilling, 2m samples were collected and analysed for various elements dependent on lithologies; Elements assayed- Au, Ag, Pd, Pt, Cu, Ni, Zn,Pb, Co, TiO, Cr, Nb, La. Unknown laboratory and method. Levels of Ni-PGE anomalism are significant in the context of shallow single hole tests of each prospect. The reporting of RC drilling and drilling logs from the report support industry standard work for the period being undertaken. Kennecott Explorations, 1973, WAMEX report a4301, EM Survey, Geoterrex- airborne EM survey, N 250° W bearing, 1/2 mile spacing, navigation by photomosaic and mean ground clearance of 400 ft maintained. Aircraft Super Canso, carrying Barringer Mark V Input system Barringer Mark VI Input system, Barringer AM101A nuclear precession magnetometer, Honeywell Visicorder, APN-1 Altimeter, a 35mm continuous strip tracking film and a 50 c/s monitor. Pacminex Pty Limited, 1973, WAMEX report a4098, 332, -80# fraction stream samples collected and assayed for Cu, Mo, Sn and W.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	 Scorpion Minerals- 2025 RC Drilling was undertaken as industry standard reverse circulation drilling, with ibrilling completing work with a HYDCO 350 truck mounted rig with 350/1250 onboard compressor, and separate 900/1150 booster. Face-sampling drill bit size varied from 143mm to 138mm. OZZ Resources, 2021, RC Drilling, Drilling was completed by Three Rivers Drilling Pty Ltd, using a Schramm 64 track mounted rig with Sullair 350/900 cfm on-board compressor, augmented with a 2000cfm auxiliary Air Truck mounted with an Ingersoll Rand 350/1070 cfm compressor coupled to a 2010 Air Research Booster compressor capable of 900 psi. RC holes were collared with a 5 5/8-inch diameter face sampling bit and drilled through to depth with a 5 1/4-inch diameter face sampling bit. E79 Gold Mines Limited, 2023, Auger Drilling, Holes were drilled to 0.5- to 1.5m depth depending on ground conditions and were taken from a vehicle mounted auger rig. Scorpion Minerals- 2021, RC Drilling was undertaken as industry standard reverse circulation drilling, with ibrilling completing work with a UDR450 track mounted rig and separate 900/1150 booster. Face-sampling drill bit size was 140mm. Scorpion Minerals- 2020 RC Drilling was undertaken as industry standard reverse circulation drilling, with ibrilling completing work with a HYDCO 350 truck mounted rig with 350/1250 onboard compressor, and separate 900/1150 booster. Face-sampling drill bit size varied from 143mm to 138mm. Emetals Limited 2020 – 2021, RC drilling was undertaken with a slimline reverse circulation face-sampling hammer bit. Venus Metals 2016 – 2020, RC Drilling, 9 holes for 780 m depth were drilled. The orientation of the holes varies between 135°N and 360°N Azi and dip varies between -55° and -60°. Alchemy Resources Limited 2010, AC Drilling, unknown, refer WAMEX report a86265. Hannans Reward NL 2004, AC Drilling, unknown, refer WAMEX report a45300. Equinox Resources NL, 1994, RAB Dr

Criteria	JORC Code explanation	Commentary
		 BHP Minerals Limited, 1986, RAB and Diamond Drilling, unknown, refer WAMEX report a21668. BHP Minerals Limited, 1986, RAB Drilling, unknown, refer WAMEX report a20413. BHP Minerals Limited, 1985, RAB Drilling, unknown, refer WAMEX report a18151. CRA Exploration Ltd 1983, RC Drilling, WAMEX report a16051, drilling was undertaken as period industry standard reverse circulation drilling, with Ingersol Rand T4, unspecified bit size, likely completed with crossover sub.
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	 Scorpion Minerals – 2020, 2021 and 2025 RC Drilling Visually assessed metre recovery Booster used to assist drilling as required, cyclone cleared at clayey interfaces No sample bias known to have occurred OZZ Resources, 2021, RC Drilling. Sample weights, dryness and mass recoveries are observed and recorded with sample data by the supervising geologists. Samples were weighed at the laboratory to allow comparative analysis between submitted sample weight and grade. OZZ contracted drillers use industry appropriate methods to maximise sample recovery and minimise downhole contamination. No significant sample grade bias associated with sample recovery has been noted in previous drilling or in drilling conducted by OZZ. E79 Gold Mines Limited, 2023, Auger Drilling, no recovery data was taken. Emetals Limited 2020 - 2021, RC Drilling, drilling recoveries were good (95%). Sample recovery was qualitatively logged for all metre intervals with recovery, moisture and contamination noted where present. Sample recovery was maximized via drilling of dry samples, at high air pressure. No relationship between grade and sample recovery can be established at this time. Venus Metals 2016 – 2020, RC Drilling, visual inspection of samples from the current shallow depth drilling identified a good recovery of samples. As this was an initial reconnaissance drilling, we cannot identify any relationship between sample recovery and grade. Alchemy Resources Limited 2010, AC Drilling, unknown, refer WAMEX report a86265. Hannans Reward NL 2004, AC Drilling, unknown, refer WAMEX report a45300. Equinox Resources NL, 1994, RAB Drilling, unknown, refer WAMEX report a37370. Newcrest Operations Limited, 1993, RAB Drilling, unknown, refer WAMEX report a37370. Newcrest Mining Limited, 1993, RAB Drilling, unknown, refer WAMEX re
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 Scorpion Minerals Limited- 2020, 2021 and 2025 RC Drilling RC samples were geologically logged in the field to a level consistent with the supporting of respective Mineral Resource Estimation Quantitative, supported by retention of chip trays for photography All relevant intersections logged OZZ Resources, 2021, RC Drilling. All holes were logged in full by qualified OZZ staff geologists in line with industry standards and the OZZ logging scheme. Logging of RC chips records included lithology, mineralogy, mineralisation, weathering, colour and other features of the samples. All samples are wet-sieved and stored in chip trays. These trays were stored off site for future reference. E79 Gold Mines Limited, 2023, Auger Drilling, colour and reactiveness to acid were completed for each sample. Rock chips were logged for Lithology, alteration and texture.

Criteria	JORC Code explanation	Commentary
Sub- sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being	 Scorpion Minerals Limited Rock chip samples were geologically logged in the field Emetals Limited 2020 – 2021, RC Drilling, logged qualitatively by the on-site geologist from drill chip samples taken every metre. Logging is undertaken on geology, alteration, veining, sulphides and shearing. Logging of vein and sulphide percentages is semi-quantitative. Venus Metals 2016 – 2020, Rock chips taken of potentially mineralised pegmatites, as well as hydrothermally altered intrusive and basement rock. Soil Sampling, sample compositions and landform/regolith settings were qualitatively recorded, and geo-tagged photos were taken of all samples and the sample site settings. RC Drilling, all RC drill chip samples were geologically logged on site. The current exploration was an initial reconnaissance/scout drilling hence is not applicable for Mineral resource estimation/mining studies at this stage. Alchemy Resources Limited 2010, AC Drilling, geologically logged, refer WAMEX report a69137. Newcrest Operations Limited, 1999, AC Drilling, geologically logged, refer WAMEX report a59755. Hampton Hill Mining Nt. 1994, RAB Drilling, geologically logged, refer WAMEX report a45300. Equinox Resources NL, 1994, RAB Drilling, geologically logged, refer WAMEX report a43716. Newcrest Operations Limited, 1993, RAB Drilling, geologically logged, refer WAMEX report a37370. Newcrest Mining Limited, 1992, RAB Drilling, geologically logged, refer WAMEX report a37370. Newcrest Mining Limited, 1992, RAB Drilling, geologically logged, refer WAMEX report a3754. Newcrest Mining Limited, 1992, RAB Drilling, geologically logged, refer WAMEX report a3754. BHP Gold Mines Limited, 1986, RAB and Diamond Drilling, geologically logged, refer WAMEX report a38754. BHP Minerals Limited, 1986, RAB and Diamond Drilling, geologically logged
sampling techniques and sample	 If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. 	 BHP Minerals Limited, 1985, RAB Drilling, geologically logged, refer WAMEX report a18151. CRA Exploration Ltd 1983, RC Drilling, unknown, refer WAMEX report a16051. Scorpion Minerals Limited- 2020, 2021 and 2025 RC Drilling Non-core drilling, generally sampled dry, wet samples noted Sample preparation technique considered appropriate to sample type Cyclone cleaning routinely carried out during drilling No field duplication undertaken to date, further work planned Sample sizes considered appropriate to the grain size of the material being sampled OZZ Resources, 2021, RC Drilling. Sample preparation and Au analysis was undertaken by a certified laboratory (SGS Laboratories). Sample preparation by dry pulverisation to 85% passing 75 microns is monitored with pass rates recorded at regular intervals as part of the labs reporting process. Pass rates are monitored on a batch-by-batch basis as part of QAQC conventions. Sample weights, dryness and mass

Cuitouis	IODC Code audemation	Commentered
Criteria	JORC Code explanation	Commentary
Quality of	The nature quality and appropriateness of the assaying and laboratory	 Venus Metals, 2016 – 2020, Soil Sampling, all samples were dry at the time of sampling and soil samples were sieved using a hand-held sieve with a 2mm aperture. No specific quality control was adopted as part of this reconnaissance programme. The sample size is considered appropriate for the targeted pegmatite hosted Li-Ta mineralization. RC Drilling, drill samples were collected for each meter using a rig-mounted rotary splitter. The RC drill chip samples were sub sampled for 3m composites using the Spear method (approximately 2-3 kg/ sample) in Calico bags labelled with representative Sample ID's. 1m samples were also collected in calico bags using same method and labelled with Sample Ids. The composite and 1m samples were secured and packed in carton boxes and sent to SGS, Lab Perth. Alchemy Resources Limited 2010, AC Drilling, unknown, refer WAMEX report a86265. Hannans Reward NL, 2004, AC Drilling, unknown, refer WAMEX report a69137. Newcrest Operations Limited, 1999, AC Drilling, unknown, refer WAMEX report a45300. Equinox Resources NL, 1994, RAB Drilling, unknown, refer WAMEX report a43716. Newcrest Operations Limited, 1993, RAB Drilling, unknown, refer WAMEX report a337370. Newcrest Operations Limited, 1993, RAB Drilling, unknown, refer WAMEX report a337370. Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a373792. Newcrest Mining Limited, 1991, RAB Drilling, unknown, refer WAMEX report a38754. BHP Gold Mines Limited, 1987, Diamond drilling was sawn or fillet sampled, other drilling unknown, refer WAMEX report a27504. BHP Minerals Limited, 1986, RAB and Diamond Drilling. Diamond drilling was sawn or fillet sampled, other drilling unknown, refer WAMEX report a27504. BHP Minerals Limited, 1986, RAB and Diamond Drilling. Diamond drilling was sawn or fillet sampled, other drilling unknown, refer WAMEX report a20413. BHP Minerals Limited, 1986, RAB Drilling, unknown, re
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	 Scorpion Minerals Limited- 2021 and 2025 RC Drilling Au by 40gm Aqua Regia Digest, NAGROM method – ICP008 considered partial, As by ICP008. Standards and Blanks submitted at minimum once each per hole; acceptable levels of accuracy established. Scorpion Minerals Limited- 2020 RC Drilling Au by 50gm Fire Assay, NAGROM method – FA50_OES considered complete; - Au by 40gm Aqua Regia Digest, NAGROM method – ICP008 considered partial Standards and Blanks submitted at minimum once each per hole; acceptable levels of accuracy established. OZZ Resources, 2021, RC Drilling. Au analysis was undertaken by SGS Laboratories (a registered laboratory), with 50g fire assay and MP-AES finish. This method has a detection limit of 0.01g/t. Internal certified laboratory QAQC is undertaken as is industry standard; including check samples, repeats, blanks, and internal standards. SGS laboratories refire anomalous samples and include their own check samples within each submission (as is industry standard); including repeats, blanks, and internal standards. Detection limits and techniques are appropriate for the detection of Au mineralisation in the materials analysed. Sampling included field duplicates, blind reference standards, field blanks and interlaboratory checks to confirm assay precision and accuracy with sufficient confidence for the current results, at a frequency of 5% (i.e., 1 in 20). E79 Gold Mines Limited, 2023 Auger Drilling samples were analysed using LabWests' UltraFine technique, whereby the sub 2 micro clay fraction is separated and analysed with the latest microwave technique and ICPMS or ICP_OES machines. Samples were digested using an UltraFine+™ Technique followed by analysis of gold by ICPMS with lower detection limit of 0.5ppb Au. 50 multiellements analysed by ICPMS/ICPOES and include; Ag, Al, As, Au, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Dy, Er, Eu, Fe, Ga, Gd, Ge, Hf, Hg, Ho, In, K, La, Li,

Critoria	IORC Code evaluation	Commentary
Criteria	JORC Code explanation	Commentary Park Chicago and Alexandria Alex
		Rock Chips samples were analysed using ALS 4 acid digest with ICP-MS or ICP_OES finish. 48 Elements were analysed including; Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn, Zr. Gold was analysed using a Fire assay with a 50gm charge. No external standards were used. Li was converted to Li2O using an industry standard value of 2.153. No QAQC was undertaken on the samples.
		• Emetals Limited, 2020 – 2021, RC Drilling, Mughal RC drill samples are analysed by 33 element 4 acid digest Standards were inserted at a rate of 2 per 100. Laboratory standards, duplicates and blanks were in addition to the company QAQC samples. QAQC for all batches were inspected and classified as acceptable.
		• Venus Metals, 2016 – 2020, Rock Chip Sampling, the laboratory assaying techniques are suitable for the samples submitted. Samples were submitted to SGS Lab in Perth for multielement analysis utilising DIG90Q& IMS90Q for Li, Be, Cs, Nb, Rb, Sn, Sr and Ta and ICP90Q for Li and XRF78S for few samples to mainly confirm the high values of Rb. Soil Sampling, all samples were analysed by Nagrom Assay Laboratory Kelmscott, WA. The sample preparation involved drying at1050C followed by crushing to minus 6.3mm (rock samples) and pulverizing to 80% passing 75 micron. This was followed by a Peroxide Fusion Digest with ICP MS and OES finish (Method ICP005) for 15 elements. The digest is considered a total dissolution of the sample. The laboratory quality control included duplicates, repeats and the insertion of two standard materials. The results of the QA work are considered acceptable. RC Drilling, the laboratory assaying techniques are suitable for the samples submitted. All Composite Samples were sent for assaying at SGS Lab in Perth for multi-element Analysis using Sodium Peroxide fusion method (DIG90Q) followed by ICPMS
		(IMS90Q) for analysing Ag, Be, Cs, Nb, Rb, Sc, Sn, Ta & W, Sodium Peroxide fusion method (DIG90Q) followed by ICPOES (ICP90Q) for analysing Al, As, Ca, Co, Cr, Cu, K, Li, Mg, Mo, Mn, Ni, Pb, S, Si, Sr & Zn, Fire assay method (FAM303) for analysing Au, Pd and Pt.
		 Alchemy Resources Limited 2010, WAMEX report a86265, Aircore (AC) drilling, 7 holes completed for 233m samples collected as typically 4m composites and sent to KalAssay laboratories in Perth with Au analysed by method AR40_ICPMS, and bottom of hole by method AD02_SCAN for a 48 element suite.
		 Hannans Reward NL, 2004, holes generally sampled as 4m composites and based on anomalous results assayed for Au, As, Cu, Ni, Pb, Zn, Pd, Pt, Co, Cr and Zn.
		 Newcrest Operations Limited, 1999, WAMEX report a59755, Aircore (AC) drilling, samples collected as 4m or 5m composites and sent to AMDEL for assaying of Au by method AA9, Aqua Regia digest and for Cu, Pb Zn, As, NI, Co and Sb by method IC9, ICP and Aqua Regia digest
		 Hampton Hill Mining NL, 1994, WAMEX report a45300, RAB drilling, samples collected as 4m composites and sent to ALS for assaying of Au by method PM209, 50g fire assay with AAS finish.
		• Equinox Resources NL, 1994, WAMEX report a43716, RAB drilling, samples collected as 4m composites and
		 sent to GENALYSIS for assaying of Au and As, by unknown method, 1m re-splits taken when Au >0.01 ppm Newcrest Operations Limited, 1993, WAMEX reports a38052 and a40714, RAB drilling, 4m composite samples were collected and submitted to Genalysis Laboratory Services and analysed for Au and As by method B/AAS, anomalous 4m results >0.1 ppm Au were then resubmitted for 1m analysis.
		 Guardian Resources NL, 1992, WAMEX report a37370, RAB drilling, samples collected as 4m composites and sent to GENALYSIS for assaying of Au and As by method B/AAS, 1m re-splits taken and assayed wher anomalous.
		 Newcrest Mining Limited, 1992, WAMEX report a37792, RAB drilling, drilled at 1m intervals and 4 metre composite samples collected, assayed by Genalysis Perth for Au and As (AAS) composite samples assayed >0.1 ppm Au were resubmitted at 1m intervals.
		 Newcrest Mining Limited, 1992, WAMEX report a35547. 188, -20# +30# stream samples collected and sen to Genalysis Perth for analysis. Au ppb analysed by method B/ETA. Ag, Cu, Pb and Zn analysed by acid diges (AAS), As, Mo, Sb, Sn and W analysed by MS.
		 Newcrest Mining Limited, 1991, WAMEX report a38754, RAB drilling, drilled at 2 metre intervals and 4 metre composite samples collected, assayed by Genalysis Perth for Au (B/ETA carbon rod) and Ni, Cu, Zn, As, Mo Ag, Sb, Pb and Bi (acid digest AAS), 2m metre composite resubmitted on elevated geochemistry.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data.	 ■ BHP Gold Mines Limited, 1988-1989, WAMEX report a27504, RAB drilling samples were collected at 2 metre intervals and assayed by Pilbara Laboratories Balcatta for Au, Ni, Cu, Zn, Pb and As. Diamond drilling, RC pre-collars were samples at 2 metre intervals, diamond core was samples to geological contacts. RC and Diamond assayed by AAL for Au (fire assay) and Cu, Pb, Zn, Ag, Ni, As, Mo, W, Sb and B (various methods D300, D210 and D510) ■ BHP Minerals Limited, 1987, WAMEX report a24612, Diamond drilling, core was sawn, or fillet sampled and analysed Resource Development Laboratories Perth for Au (fire assay Half core Aqua Regia for fillet samples) and Ni, Cu, Zn, Pb, Ag and As (AAS) ■ BHP Minerals Limited, 1986, WAMEX report a21668, RAB drilling samples were collected at 2 metre intervals, select samples analysed by Resource Development Laboratories Perth for Au, Pt, and Pd (fire assay) and As, Bi, Sb, Se, Sn, Ni, Cu, Zn, Pb, Ag, Mo, Ba, B, V, Ti, Cr, Zn and W (various methods, AAS, ICP, Colorimetry) Diamond Drilling, core was sawn or fillet sampled and analysed Resource Development Laboratories Perth for Au, Pt, and Pd (fire assay) Half core Aqua Regia for fillet samples) and Ni, Cu, Zn, Pb, Ag and As (AAS) ■ BHP Minerals Limited, 1986, WAMEX report a20413, RAB drilling samples were collected at 2 metre intervals and assayed by Pilbara Laboratories Perth, Au (fire assay) and As, Bi, Sb, Se, Sn, Ni, Cu, Zn, Pb, Ag, Mo, Ba, B, V and W (various methods, AAS, ICP, Colorimetry), select samples analysed for Pd and Pt by Resource Development Laboratories in Balcatta by fire assay. ■ BHP Minerals Limited, 1985, WAMEX report a18151, RAB drilling, samples were collected at 2 metre intervals and assayed by Pilbara Laboratories Perth, Au (fire assay) and As, Ni, Cr, Cu, Co, Ti, Zr, V and B (various methods AAS, ICP) CRA Exploration Ltd, 1983, holes sampled every 2m and analysed based on lithologies for Au, Ag, Pd, Pt, Cu, Ni, Zn, Pb, Co, TiO, Cr
		 For all intercepts, the first received assay result is always reported. E79 Gold Mines Limited, 2023, Auger Drilling, refer E79 ASX Releases 17/5/2023, 28/9/2023 Scorpion Minerals Limited Rock chip samples were logged in field notebooks and transferred to the corporate database on return from the field. No adjustments have been made to the data as received from the laboratory. Emetals Limited, 2020 - 2021, RC Drilling, samples were recorded in the field on hard copy maps and notebooks and locations compared to GPS data. Any significant assays were verified by alternate company personnel. Venus Metals, 2016 - 2020, Soil Sampling, sampling was done by experienced VMC staff under the supervision of a Senior Geologist. All field data were collected manually and transferred to spreadsheets.

Criteria	JORC Code explanation	Commentary
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control.	Sample location coordinates were determined and recorded using a handheld GPS and by geo-tagged photographs. Elemental Li was converted to LIZO by a conversion factor of 1.2.153, Ta was converted to Ta2O5 by a conversion factor of 1.2.11, W as converted to WO3 by a conversion factor of 1.2.61. KC Drilling, all composite and 1m split samples were verified by independent Geological Consultant and company representative in the field before submitting to the Laboratory for assaying. No adjustments to assays were done. Alchemy Resources Limited 2010, AC Drilling, unknown, refer WAMEX report a86265. Hannans Reward NL, 2004, AC Drilling, unknown, refer WAMEX report a89375. Hampton Hill Mining NL, 1994, RAB Drilling, unknown, refer WAMEX report a59755. Hampton Hill Mining NL, 1994, RAB Drilling, unknown, refer WAMEX report a43716. Newcrest Operations Limited, 1993, RAB Drilling, unknown, refer WAMEX report a35300. Equinox Resources NL, 1994, RAB Drilling, unknown, refer WAMEX report a3530. Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a37370. Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a37370. Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a37370. Newcrest Mining Limited, 1991, RAB Drilling, unknown, refer WAMEX report a37370. Newcrest Mining Limited, 1991, RAB Drilling, unknown, refer WAMEX report a37504. BHP Minerals Limited, 1986, RAB Drilling, unknown, refer WAMEX report a2612 for further details. BHP Minerals Limited, 1986, RAB Drilling, unknown, refer WAMEX report a2612 for further details. BHP Minerals Limited, 1986, RAB Drilling, unknown, refer WAMEX report a20413. BHP Minerals Limited, 1985, RAB Drilling, unknown, refer WAMEX report a20413. BHP Minerals Limited, 1985, RAB Drilling, unknown, refer WAMEX report a20413. BHP Minerals Limited, 1986, RAB Drilling, unknown, refer WAMEX report a20413. BHP Minerals Limited, 1986, RAB Drilling, unknown, refer WAMEX report a80514. CRA Exploration Ltd 1983, RC Drilling, un

Criteria	JORC Code explanation	Commentary
Data spacing and distribution	Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied.	 Alchemy Resources Limited 2010, AC Drilling, unknown, refer WAMEX report a86265. Hannans Reward NL, 2004, AC Drilling, unknown, refer WAMEX report a69137. Newcrest Operations Limited, 1999, AC Drilling, unknown, refer WAMEX report a59755. Hampton Hill Mining NL, 1994, RAB Drilling, unknown, refer WAMEX report a45300. Equinox Resources NL, 1994, RAB Drilling, unknown, refer WAMEX report a45301. Newcrest Operations Limited, 1993, RAB Drilling, unknown, refer WAMEX report a38547. Newcrest Mining Limited, 1992, stream sampling, unknown, refer WAMEX report a35370. Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a3770. Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a3770. Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a3770. Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a37792. Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a37792. BHP Gold Mines Limited, 1985, RAB Drilling, unknown, refer WAMEX report a24612. BHP Minerals Limited, 1985, RAB Drilling, unknown, refer WAMEX report a24612. BHP Minerals Limited, 1986, RAB Drilling, refer WAMEX report a10413 for further details. CRA Exploration Ltd 1983, RCD Drilling, refer WAMEX report a10413 for further details. BHP Minerals Limited, 1973, unknown, refer WAMEX report a16051. Pacminex Pty Limited, 1973, unknown, refer WAMEX report a16051. Pacminex Pty Limited, 1973, unknown, refer WAMEX report a16051. Pacminex Pty Limited, 1973, unknown, refer WAMEX report a16051. Pacminex Pty Limited, 1973, unknown, refer WAMEX report a16051. Pacminex Pty Limited, 1973, unknown, refer WAMEX report a16051. Pacminex Pty Limited, 1973, unknown, refer WAMEX report a1605

Criteria	JORC Code explanation	Commentary
-cireciiu	To the sould explanation	Alchemy Resources Limited 2010, AC Drilling, refer WAMEX report a86265 for further details.
		Hannans Reward NL, 2004, Drill collars generally spaced at 100m intervals on East-West lines
		Newcrest Operations Limited, 1999, AC Drilling, refer WAMEX report a59755 for further details.
		Hampton Hill Mining NL, 1994, RAB Drilling, refer WAMEX report a45300 for further details.
		Equinox Resources NL, 1994, RAB Drilling, refer WAMEX report a43716 for further details.
		Newcrest Operations Limited, 1993, RAB Drilling, refer WAMEX reports a38052 and a 40714 for further
		details.
		Newcrest Mining Limited, 1992, stream sampling, unknown, refer WAMEX report a35547.
		Guardian Resources NL, 1992, RAB Drilling, refer WAMEX report a37370 for further details.
		Newcrest Mining Limited, 1992, RAB Drilling, refer WAMEX report a37792 for further details.
		Newcrest Mining Limited, 1991, RAB Drilling, refer WAMEX report a38754 for further details.
		BHP Gold Mines Limited, 1988-1989, RAB, RC and Diamond Drilling, refer WAMEX report a27504 for further
		details.
		BHP Minerals Limited, 1987, Diamond Drilling, refer WAMEX report a24612 for further details.
		BHP Minerals Limited, 1986, RAB and Diamond Drilling, refer WAMEX report a21668 for further details.
		BHP Minerals Limited, 1986, RAB Drilling, refer WAMEX report a20413 for further details.
		BHP Minerals Limited, 1985, RAB Drilling, refer WAMEX report a18151 for further details.
		CRA Exploration Ltd 1983, RC Drilling, unknown, refer WAMEX report a16051.
Orientation	Whether the orientation of sampling achieves unbiased sampling of possible	Pacminex Pty Limited, 1973, unknown, refer WAMEX report a4098. Scorpion Minerals Limited- 2020, 2021 and 2025 RC Drilling
of data in relation to geological structure	structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	 Orientation of sampling has not necessarily achieved unbiased sampling of some structures, discussed in text. No knowledge of sampling bias at this early stage of understanding. OZZ Resources, 2021, RC Drilling. Historical diamond programs undertaken by BHP (1987-1989) recorded major penetrative foliation dipping ~700 west with carbonate-quartz stockwork dipping 350 west. Surface rodding through field mapping returned dip/strikes of ~900/280-3000. The historically recorded mineral elongation lineation plunges 800. The drill orientation is approximately perpendicular to the main historical mineralised trend supported by public record aeromagnetics and previous drill hole information. For all prospects, the true width of mineralisation is defined in the resource estimation process. E79 Gold Mines Limited, 2023, Auger Drilling, Sample lines were completed on an east west pattern, perpendicular to the trend of the main geological units. Emetals Limited, 2020 – 2021, RC Drilling, drilling was orthogonal to the interpreted dip of the target zones. Venus Metals, 2016 – 2020, Soil Sampling, given the potentially complex geometry of pegmatite bodies, it is at this stage uncertain whether the sampling was unbiased. As the dominant geological orientation of the pegmatite bodies appears to be north-south, east-west orientated sampling traverses would seem most appropriate. A small number of stream sediment samples were taken to verify historical assays, and this was done in first and second order streams. RC Drilling, 9 holes for 780 m depth were drilled. The orientation of the holes varies between 135°N and 360°N azimuth and dips vary between -55 and -60. The drill holes were oriented in-order to understand the trend & dip direction of the pegmatite and schistose lithological units under cover.
		 Alchemy Resources Limited 2010, AC Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a86265 for further details. Hannans Reward NL, 2004, AC Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a69137 for further details Newcrest Operations Limited, 1999, AC Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a59755 for further details. Hampton Hill Mining NL, 1994, RAB Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a45300 for further details.

Criteria	JORC Code explanation	Commentary
Sample security	The measures taken to ensure sample security. The measures taken to ensure sample security.	 Equinox Resources NL, 1994, RAB Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a43716 for further details. Newcrest Operations Limited, 1993, RAB Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX reports a38052 and a 40714 for further details. Guardian Resources NL, 1992, RAB Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a37370 for further details. Newcrest Mining Limited, 1992, RAB Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a37792 for further details. Newcrest Mining Limited, 1991, RAB Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a38754 for further details. BHP Gold Mines Limited, 1988-1989, RAB, RC and Diamond Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a27504 for further details. BHP Minerals Limited, 1987, Diamond Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a24612 for further details. BHP Minerals Limited, 1986, RAB and Diamond Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a21668 for further details. BHP Minerals Limited, 1986, RAB Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a20413 for further details. BHP Minerals Limited, 1985, RAB Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a18151 for further details. Pacminex Pty Limited, 1973, RC Drilling, perpendicular to the trend of the main geological units or magnetic anomalies, refer WAMEX report a20413 for further
		 E79 Gold Mines Limited, 2023, Auger Drilling, samples were stored on site and taken directly to the laboratory by via a freight company. Rock chip sampling, samples were stored on site and taken directly to the laboratory by E79 staff. Scorpion Minerals Limited Rock chip samples were collected in the field by Company geologists and hand delivered to the laboratory. Gold specimens/nuggets remain in the possession of the discoverers. Scorpion Minerals Limited- 2020 RC Drilling RC samples were collected in the field by Company geologists, bagged in Polyweaves and hand delivered to Toll Ipec depot in Cue. Palleted Bulka Bags were collected at night and delivered to Toll Ipec Depot in Perth the next morning, before courier delivery to Nagrom in Kelmscott, receipted by the laboratory that day. Emetals Limited, 2020 – 2021, RC Drilling, samples were delivered by company personnel to the laboratory. Venus Metals, 2016 – 2020, Rock Chip Sampling and RC Drilling, samples were bagged with appropriate sample numbers and secured by field staff prior to transporting to the laboratory. Soil Sampling, all samples were placed in zip-lock plastic bags. All samples taken along one traverse were then placed in polywoven bags and secured with cable ties. Samples were taken to Perth and delivered to the laboratory by Venus staff.

Criteria	JORC Code explanation	Commentary
		Alchemy Resources Limited 2010, AC Drilling, unknown, refer WAMEX report a86265.
		Hannans Reward NL, 2004, AC Drilling, unknown, refer WAMEX report a69137.
		Newcrest Operations Limited, 1999, AC Drilling, unknown, refer WAMEX report a59755.
		Hampton Hill Mining NL, 1994, RAB Drilling, unknown, refer WAMEX report a45300.
		Equinox Resources NL, 1994, RAB Drilling, unknown, refer WAMEX report a43716.
		Newcrest Operations Limited, 1993, RAB Drilling, unknown, refer WAMEX reports a38052 and a 40714.
		Newcrest Mining Limited, 1992, stream sampling, unknown, refer WAMEX report a35547.
		Guardian Resources NL, 1992, RAB Drilling, unknown, refer WAMEX report a37370.
		Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a37792.
		Newcrest Mining Limited, 1991, RAB Drilling, unknown, refer WAMEX report a38754.
		BHP Gold Mines Limited, 1988-1989, RAB, RC and Diamond Drilling, unknown, refer WAMEX report a27504.
		BHP Minerals Limited, 1987, Diamond Drilling, unknown, refer WAMEX report a24612.
		BHP Minerals Limited, 1986, RAB and Diamond Drilling, unknown, refer WAMEX report a21668.
		BHP Minerals Limited, 1986, RAB Drilling, unknown, refer WAMEX report a20413.
		BHP Minerals Limited, 1985, RAB Drilling, unknown, refer WAMEX report a18151.
		CRA Exploration Ltd 1983, RC Drilling, unknown, refer WAMEX report a16051.
Audits or	The results of any audits or reviews of sampling techniques and data.	Scorpion Minerals Limited- 2020, 2021 and 2025 RC Drilling Some assaying of resplit field duplicates
reviews		completed. Some possible upgrade in values. Re-splitting and duplicate sampling of some anomalous
		intervals.
		OZZ Resources, 2021, RC Drilling. No formal audits have been completed on sampling techniques and data
		due to the early-stage nature of the drilling. QA/QC data is regularly reviewed by OZZ, and results provide
		confidence in the assay data and laboratory performance. The laboratory was advised of any discrepancies
		and samples are re-assayed. Sampling techniques were informally reviewed on site periodically by the OZZ
		Exploration Manager to ensure industry standard sampling methods are being maintained to a high standard.
		E79 Gold Mines Limited, 2023, no audits or reviews have been undertaken.
		• Emetals Limited, 2020 – 2021, RC Drilling, review of the results has taken place with importing of collars,
		assays and surveys into MicroMine to confirm the interpretation and results.
		Venus Metals, 2016 – 2020, no audits or reviews were done.
		Alchemy Resources Limited 2010, AC Drilling, unknown, refer WAMEX report a86265.
		Hannans Reward NL, 2004, AC Drilling, unknown, refer WAMEX report a69137.
		Newcrest Operations Limited, 1999, AC Drilling, unknown, refer WAMEX report a59755.
		Hampton Hill Mining NL, 1994, RAB Drilling, unknown, refer WAMEX report a45300.
		Equinox Resources NL, 1994, RAB Drilling, unknown, refer WAMEX report a43716.
		Newcrest Operations Limited, 1993, RAB Drilling, unknown, refer WAMEX reports a38052 and a 40714.
		Newcrest Mining Limited, 1992, stream sampling, unknown, refer WAMEX report a35547.
		Guardian Resources NL, 1992, RAB Drilling, unknown, refer WAMEX report a37370.
		Newcrest Mining Limited, 1992, RAB Drilling, unknown, refer WAMEX report a37792.
		Newcrest Mining Limited, 1991, RAB Drilling, unknown, refer WAMEX report a38754.
		BHP Gold Mines Limited, 1988-1989, RAB, RC and Diamond Drilling, unknown, refer WAMEX report a27504.
		BHP Minerals Limited, 1987, Diamond Drilling, unknown, refer WAMEX report a24612.
		BHP Minerals Limited, 1986, RAB and Diamond Drilling, unknown, refer WAMEX report a21668.
		BHP Minerals Limited, 1986, RAB Drilling, unknown, refer WAMEX report a20413.
		BHP Minerals Limited, 1985, RAB Drilling, unknown, refer WAMEX report a18151.
		CRA Exploration Ltd 1983, RC Drilling, unknown, refer WAMEX report a16051.
		Pacminex Pty Limited, 1973, Stream Sampling, unknown, refer WAMEX report a4098.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary			
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	Scorpion Minerals Limited, PF E20/885, E20/896, E20/931, P20/2253 are granted exploration tenement holder. F79 Gold Mines Limited, Jung E20/926, E51/1803, E51/184 licences that E79 have a 100% E51/1681, E79 has a 100% int Details of the JV (joint venture titled 'Murchison Gold JV' OZZ Resources, Old Prospect P 20/2318 is a granted prospe	E20/948, E20/953, ation and prospection and Heritage Agree ar Flats 8, E51/1975, E51/5 interest in. erest in all mineral e) with E79 Gold Mineral actions licence, P 20/2	E20/962, E20/963, E20/964, E20/1020, ng licences held by Scorpion Minerals Limments between The Weld Range Wajarri V2122, E51/2173 and E51/2174 are grant rights excluding iron rights. les Limited can be found in ASX release dates and Scorpion Minerals can be found in t	nited. They are Yamatji and the ed exploration ted 14/02/2025
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	Data in this report is attributed Scorpion Minerals Limited E79 Gold Mines Limited OZZ Resources Emetals Limited Venus Metals Alchemy Resources Hannans Reward Newcrest Operations Limited Hampton Hill Mining NL Equinox Resources NL Newcrest Operations Limited Newcrest Mining Limited Guardian Resources NL Newcrest Mining Limited Newcrest Mining Limited BHP Gold Mines Limited BHP Minerals Limited CRA Exploration Ltd Kennecott Explorations Pacminex Pty Limited	d to the following. 2020 to 2025 2023 2021 2020 - 2021 2016 - 2020 2010 2004 1999 1994 1994 1993 1992 1992 1992 1992 1992 1991 1988-1989 1987 1986 1986 1985 1983 1973	WAMEX report a86265 WAMEX report a69137 WAMEX report a59755 WAMEX report a45300 WAMEX report a43716 WAMEX reports a38052 and a40714 WAMEX report a35547 WAMEX report a37370 WAMEX report a37792 WAMEX report a38754 WAMEX report a27504 WAMEX report a22668 WAMEX report a21668 WAMEX report a18151 WAMEX report a18151 WAMEX report a4301 WAMEX report a4098	

Criteria	JORC Code explanation	Commentary
Geology	Deposit type, geological setting and style of mineralisation.	The Company is targeting:
		Scorpion Minerals, Pharos Project Shear-hosted lode-style gold mineralisation within mafic, ultramafic and felsic volcanics Banded Iron Formation (BIF) hosted "Hill 50" style gold replacement deposits High grade quartz vein "Day Dawn" style gold mineralisation hosted within dolerite and basalt Felsic porphyry-hosted quartz stockwork and ladder vein mineralisation Weld Range-style Fe mineralisation Archean VMS Cu-Zn-Co-Au-Ag mineralisation Ni-Cu-PGE mineralisation associated with ultramafic intrusive
		E79 Gold Mines Limited, Jungar Flats
		The Jungar Flats Project is located 70 km west of Meekatharra, in the Murchison Province of the Archean Yilgarn Craton. The project area is considered prospective for orogenic gold, copper, PGE, iron and lithium mineralisation. Significant historical gold production in the Murchison includes the following mines and mining fields — Meekatharra/Paddys Flat, Bluebird, Big Bell, Cuddingwarra, and Day Dawn/Cue. The Jungar Flats Project area covers the interpreted northern extensions of the Big Bell Shear which is interpreted as an important structural control on the Big Bell gold deposit some 45 km to the southwest. Lithium is proposed to occur in greenstone belts proximal to fertile granite intrusions.
		OZZ Resources, 2021, Maguires and Old Prospect All historical drillholes have intersected moderate to high mylonised phyllite / metasediments. Any visible gold recorded is associated with arsenopyrite and euhedral pyrite and contained within a carbonate-quartz-sericite-biotite mylonite proximal to stock worked carbonate-quartz veining. Arsenic levels are high in the region overall. The top of fresh rock ranges from between 85 and 125m below surface. Gold mineralisation relates to carbonate-quartz stockworks, and veins hosted by a sheared, carbonate flooded, mafic-ultramafic volcanic succession. There is very obviously carbonate rich fluid flows and an accumulation of transitional ductile brittle structural regimes witnessed through the limited drilling to date.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	Refer to information in this and referenced reports.
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	Assays have been length weighted for calculation of intercepts, no top cut has been applied, lower cut 0.25 g/t Au have been used, allowing for 2m of downhole dilution.

Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	Intercept lengths are downhole lengths Not known Downhole lengths, true width not known
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to maps included in this report
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	The report lists both high and low grade values to provide balanced reporting
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	More detailed geological review will follow in subsequent reporting
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	Discussed in this report

Section 3 Estimation and Reporting of Mineral Resources

(Criteria listed in section 1, and where relevant in section 2, also apply to this section.)

(Applies to Old Prospect Resource)

Criteria	JORC Code explanation	Commentary
Database integrity	 Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. Data validation procedures used. 	 All data has been reviewed by Scorpion Minerals personnel and is deemed correct. Data was geologically logged onto paper. Collar and downhole surveys were received electronically as were the laboratory analysis results. These electronic files were loaded into a Datashed database by independent consultant Database Administrators. Additionally, validation checks are routinely run in the Datashed database, and they include the following: Sample data exceeding the recorded depth of hole; Checking for sample overlaps; Reporting missing assay intervals; Visual validation of co-ordinates of collar drill holes; Visual validation of downhole survey data. Missing collar information Missing logging, sampling, downhole survey data and hole diameter Checks for character data in numeric fields Data extracted from the database were validated visually in Seequent Leapfrog software. Also, when loading the data, any errors such as missing values and sample/logging overlaps are highlighted. In summary the database is good, with no significant errors due to data corruption or transcription.

Criteria	JORC Code explanation	Commentary
Site visits	 Comment on any site visits undertaken by the Competent Person and the outcome of those visits. If no site visits have been undertaken indicate why this is the case. 	Robert Seed, the Competent Person for Table 1 is Ozz Resources Exploration Manager and conducted regular site visits.
Geological interpretation	 Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. Nature of the data used and of any assumptions made. The effect, if any, of alternative interpretations on Mineral Resource estimation. The use of geology in guiding and controlling Mineral Resource estimation. The factors affecting continuity both of grade and geology. 	• All Ozz Resources and the previous operators, RC and diamond drill hole data was used to guide the interpretation of the mineralisation. The area is heavily weathered, and completely oxidised rock extends to 60m below surface. While fresh rock is intersected at about 80m. Mineralisation is controlled by shear zones, interpreted to be splays off the Big Bell Fault. Gold is associated with carbonate - sericite -biotite alteration adjacent to quartz -carbonate veining. The host rocks are a package of strongly foliated meta sediments/volcanics. Mineralisation shows good continuity Multiple mineralised lodes improve ounces per vertical meter. On surface strongly foliated outcrops have a consistent steep west dip. Outcrops are strongly rodded and indicate a steeply north plunge to the stretching direction. High grade shoots have a similar steep west dip and north plunge. The gold mineralisation at Old Prospect is hosted in several narrow steeply west dipping structures. Surface structural measurements were used as a guide to link mineralised intervals between holes. A 0.3 g/t cut off was used to manually wireframe the grade envelopes. These were used as domains to constrain the resource estimation.
Dimensions	The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.	The Old Prospect deposit extends over a strike length of 500m. It is divided into a southern portion with a strike of 115m and a northern zone of 215m strike. The two zones are separated by a weakly surface mineralised zone of 200m. In the southern prospect four mineralised structures are developed. In the north seven. The mineralisation has been modelled to 140m below surface. It is open at depth.
Estimation and modelling techniques	 The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used. The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data. The assumptions made regarding recovery of by-products. Estimation of deleterious elements or other non-grade variables of economic significance (eg sulphur for acid mine drainage characterisation). In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed. Any assumptions behind modelling of selective mining units. Any assumptions about correlation between variables. Description of how the geological interpretation was used to control the resource estimates. Discussion of basis for using or not using grade cutting or capping. The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available. 	■ Estimation of the mineral resource was by Ordinary Kriging using Leapfrog software. The raw data had a 1m sample length and this was used in the estimation. Each of the 0.3 g/t manually digitised grade envelopes were treated as separate domains with hard boundaries. Interpolation within the domain used only samples from within the domain. Search parameters and top cuts were selected for each domain from the variography. Across domains the search ellipse and parameters were very similar. Top cuts were based on inflections and discontinuities in the histograms and log-probability plots. Variography was performed on data transformed to normal scores, and the variogram models were back-transformed to original units. The variogram models had high nugget effects (~30-50% of total sill), with a range of 50m. Estimation via Ordinary Kriging was into a block model that was a non-rotated model in MGA94 grid, with a block size of 1 mE x 1 mN x 2 mRLData was capped for each domain: 25 ppm for all southern domains, 20 ppm for the northern domains. These caps were based on inflections and discontinuities in the histograms and log-probability plots. The ellipsoid search parameters were based on the variogram ranges, with the search ellipse dimensions the same as the variogram range. A minimum of 2 and maximum of 12 (1m composite) samples was used for the estimation. Estimates of gold grades were validated against the composited drill hole data by extensive visual checking in cross-section, plan and on screen in 3D, by global (per shoot) comparisons of input data and model, and by semi-local statistical methods (swath plots). All methods showed satisfactory results.
Moisture	Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.	Tonnages are estimated on a dry basis.

Criteria	JORC Code explanation	Commentary
Cut-off parameters	The basis of the adopted cut-off grade(s) or quality parameters applied.	The cut-off gold grade of 0.90 g/t was used to report the final resource.
Mining factors or assumptions	Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.	The Old Prospect deposits could be mined by open pit extraction. The resource is unconstrained, and no pit optimisation work was carried out.
Metallurgical factors or assumptions	The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.	No recovery test work is available from Old Prospect. The bulk of the deposit is strongly oxidised and so high recoveries can be expected from this part of the deposit.
Environmental factors or assumptions	Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.	There are no environmental factors identified to date that would add significant additional cost to the extraction of the material included in the resource.
Bulk density	 Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples. The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit. Discuss assumptions for bulk density estimates used in the evaluation process of the different materials. 	To estimate insitu bulk density over the two prospects a 3D model of oxidation was generated. The extent of oxidation was logged in all the 2021 RC holes. No density data is available from the Old Prospect project and density values have been assigned from local knowledge. The following density values were assigned to the model. Cover/Hardpan 1.80 t/m3 Oxide 2.10 t/m3 Transitional 2.40 t/m3 Fresh 2.75 t/m3
Classification	 The basis for the classification of the Mineral Resources into varying confidence categories. Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data). 	The classified mineral resource estimate is not constrained within an optimised pit shell. The Indicated Mineral Resource has a nominal drill spacing of 25 mN x 25 mE or closer, is was not extended more than 25m laterally beyond drilling. The Inferred Mineral Resource is material within the mineralised domain and not classified as indicated, with broader drill spacing than 25 mN x 25 mE. This classification considers the confidence of the resource estimate and the quality of the data and reflects the view of the Competent Person.

Criteria	JORC Code explanation	Commentary
	Whether the result appropriately reflects the Competent Person's view of the deposit.	
Audits or reviews	The results of any audits or reviews of Mineral Resource estimates.	 No external audits of the mineral resource have been conducted. All data has been reviewed by Scorpion Minerals personnel and is deemed correct.
Discussion of relative accuracy/ confidence	Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.	This is addressed in the relevant paragraph on Classification above. The Mineral Resource relates to global tonnage and grade estimates.
	 The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used. These statements of relative accuracy and confidence of the estimate should be compared with production data, where available. 	