



FEDERATION PROJECT EXPLORATION UPDATE SWEENEY'S AND ANOMALY 1 PROSPECTS

Highlights

Sweeney's

- **Two visible semi-massive sulphide intercepts have been observed in diamond core from drill hole number 3 at the Sweeney's prospect.**
- **A total of three holes are drilled to date for a total of 457m out of the planned 2000m program.**
- **These samples have been submitted for analysis with results due mid-February.**

Anomaly 1

- **High-grade zinc, copper, silver, tin and indium from rock chip samples taken from Anomaly 1 Prospect including:**
 - **12.75% zinc (Zn), 0.81% copper (Cu), 199g/t silver (Ag) and 0.61% tin (Sn) and >500ppm indium.**
- **Historic drill intercepts at Anomaly 1 from 1982 include 37m @ 0.21% copper, 0.26% tin, 0.86 zinc and 33g/t silver from 30m.**

Octava Minerals Ltd (ASX:OCT) ("Octava" or the "Company"), an Australian focused explorer of critical minerals is pleased to report drilling has recommenced at Sweeney's with 3 holes completed for 457m with visible semi massive sulphides in hole OFD003 occurring within two separate lodes. Also rock chips taken from mineralisation at surface at the Company's Anomaly 1 prospect have returned high grade copper, zinc, silver, tin and indium. Anomaly 1 is located 750m NE of the Sweeney's prospect in western Tasmania.

Federation Cu-Zn-Ag Project

The Federation project is located 12km west of the town of Zeehan, in Western Tasmania and comprises 2 granted tenements EL 16/2023 and EL 1/2023 covering approximately 121km². The project is well located in close proximity to a number of mining centres with processing and infrastructure, as well as a number of Hydro Power Stations.



Office Address
159 Stirling Hwy
Nedlands, WA, 6009
info@octavaminerals.com

Board Members
Clayton Dodd – Chairman
Damon O'Meara – Non – Executive Director
Feiyu Qi – Non – Executive Director
Bevan Wakelam – Managing Director / CEO

Projects
Federation – copper, zinc, silver
Byro – REE's & lithium
Yallalong – antimony, gold & nickel
East Kimberley – nickel & PGM's

Drilling at Sweeney's Prospect

Drilling has re-commenced on the Sweeney's prospect at the Federation Project. Approximately 3 diamond core holes have been completed for approximately 475m of the planned 2000m program. See Figure 1.

Visible semi massive sulphides have been observed in hole OFD003 occurring within two separate lodes. Mineralisation within the lodes consists of semi-massive sulphides within a quartz-gangue.

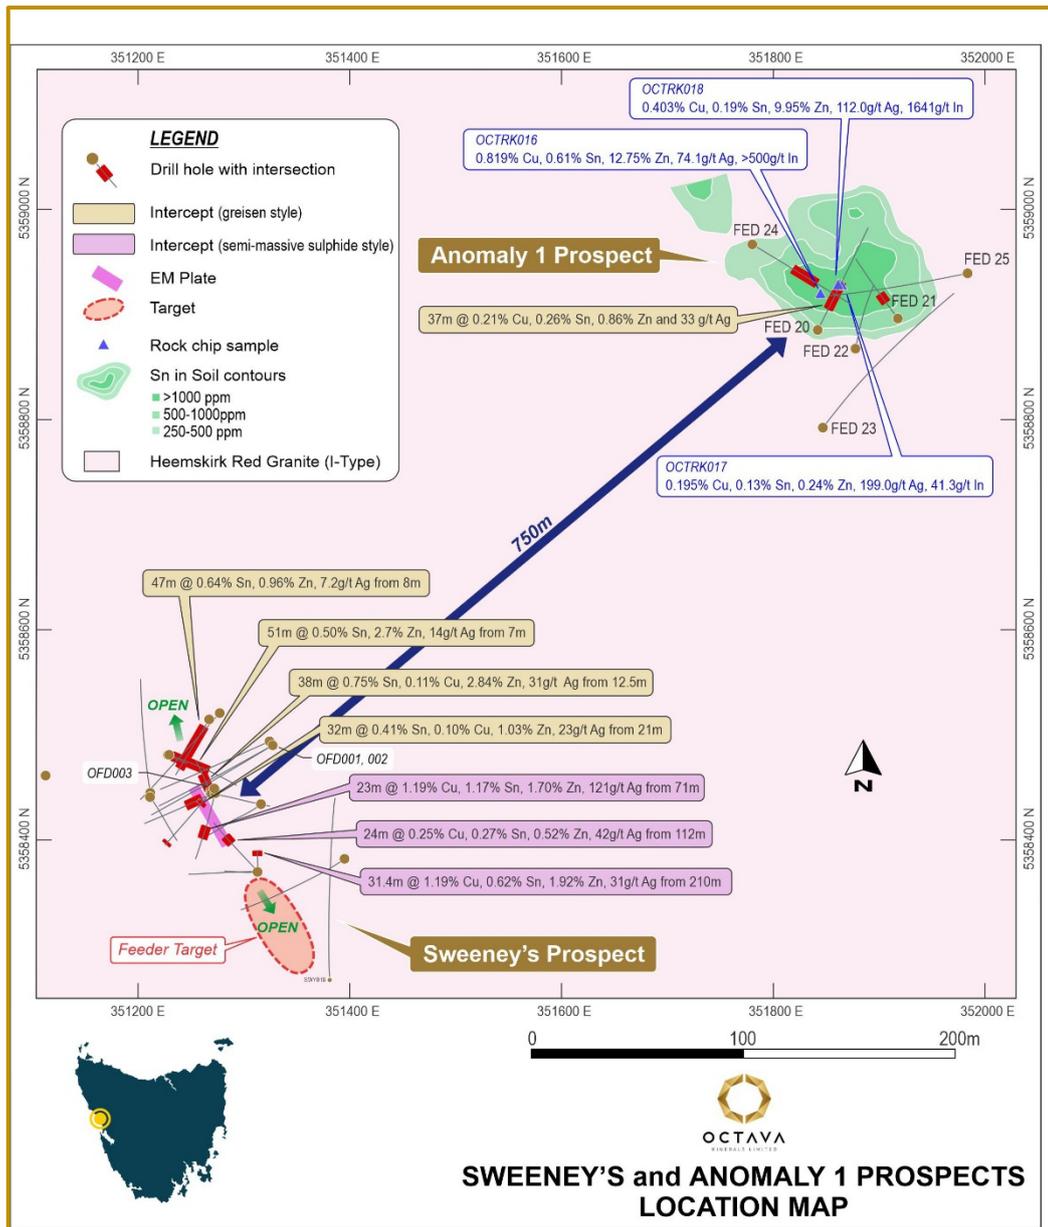


Figure 1. Location map showing Sweeney's current & historic drillholes and Anomaly 1 Prospect rock chip sample locations and historic soil samples and drill intercepts.

Outside of the sulphide quartz lodes is a halo of strong sericite, siderite alteration with minor disseminated pyrrhotite, pyrite and sphalerite within the Heemskirk Granite.

OFD003 was drilled to test the upper limit of modelled EM plate from a FLEM survey¹ in the shallow zone of interpreted historic drillhole results. See Photos 2 & 3. The core has been cut and samples dispatched to the laboratory for analysis.



Photo 2 & 3. Sweeneys Drillhole OFD003 Core Tray showing granite host rocks with sulphide lodes observed at depths of 33.55 – 39.80m (on the left) and 135-139.55m (on the right).

Table 1. Summary geological log of sulphide quartz lode (description, sulphide species and visual estimate %).

Hole ID	from (m)	to(m)	interval	Observed sulphide/minerals & percentage estimate %
OFD003	33.55	39.80	6.3	Pyrrhotite (15%), pyrite (10%), sphalerite (2%)
	135	137	2.0	Pyrrhotite (25%), pyrite (5%), sphalerite (2%), boulangerite (0.5%) fluorite (1%)
	137	139.55	2.55	Sphalerite (20%), pyrrhotite (5%), boulangerite (5%), pyrite (2%), fluorite (1%)

Cautionary Statement

Note: Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.

Table 2. Location and attitude of completed Octava Minerals drillholes at Sweeney's

	Easting (GDA94z55)	Northing (GDA94z55)	RL (mAHD)	Depth (m)	Dip	Azi (true)
OFD001	351327	5358490	285	130.1	-21.2	240.9
OFD002	351327	5358490	285	166.8	-38.4	238.9
OFD003	351272	5358449	317	144	-60.2	220.8

Anomaly 1 Prospect

Encouraging base and precious metal results have been received from reconnaissance rock chip sampling of veins exposed during earthworks for drilling at Anomaly 1 (see photo 1). Sampled vein material includes observed pyrite, sphalerite and pyrrhotite within an alteration selvage of chlorite and sericite within broader zone of silicification.



Photo 1. Outcropping sulphide vein at the Anomaly 1 prospect within the Federation project.

Results for the three samples are presented in Table 1 in Appendix 2. The strongest results were returned for OCTRK016 with **0.81% copper, >500ppm indium, 12.75% zinc, 0.61% tin and 199 g/t silver**. The outcropping mineralisation is located within a broader coherent multi element historic soil anomaly best illustrated by contoured tin. Figure 1 illustrates the location of the soil samples within the contoured tin in soil samples (see Table 2 in appendix 2 for results).

Previous Exploration

Six drillholes were completed by Renison Consolidated Goldfields in 1982 at the Anomaly 1 Prospect, intersecting significant mineralisation in 3 of the 6 holes (see Figure 1 for location of drillhole traces).

FED20 recorded the most encouraging intercept at Anomaly 1 to date. FED20 intersected a strongly altered sulphidic zone between 30-67m (37m) within the Heemskirk Red Granite (I-type), grading **37m @ 0.21% copper, 0.26% tin, 0.86% zinc and 33 g/t silver**. Within this broad interval was a semi-massive sulphide zone grading **8m @ 0.68% copper, 0.72% tin, 3.09% Zn and 122g/t silver from 30m** (see table in appendix 2 for results).

The mineralisation at Anomaly 1 is geologically complex and with minimal surface outcrop. The company has completed earthworks to permit drill testing open targets at this exciting prospect.

The company looks forward to reporting further results later in the field season when drilling at Anomaly 1 commences.

This announcement has been authorised for release by the Managing Director/CEO.

For more information, please contact:

Investor Enquiries

MD /CEO

Bevan Wakelam

info@octavaminerals.com

Chairman

Clayton Dodd

info@octavaminerals.com

¹ Octava Minerals Announcement 25/11/2025

About Octava Minerals Ltd

Octava Minerals Limited (ASX:OCT) is a Western Australian based critical minerals exploration company. The Company has strategically located projects in geographically proven discovery areas within Australia.

Competent Person Statement

The information in this report that relates to Exploration Results is based on and fairly represents, information and supporting documentation compiled by Ben Jones, a Competent Person who is a Member of the Australasian Institute of Geoscientists. Mr Jones has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Jones consents to the inclusion in the report of the matters based on this information in the form and context in which it appears.

Where the Company references exploration results previously released it confirms it is not aware of any new information or data that materially effects the information included in the relevant market announcement. The form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

Previously Released ASX Material

ASX OCT 4 December 2025

ASX OCT 25 November 2025

ASX:OCT 5 November 2025

ASX:OCT 25 July 2025

Forward looking Statements

This announcement includes certain "forward looking statements". All statements, other than statements of historical fact, are forward looking statements that involve risks and uncertainties. There can be no assurances that such statements will prove accurate, and actual results and future events could differ materially from those anticipated in such statements. Such information contained herein represents management's best judgement as of the date hereof based on information currently available. The Company does not assume any obligation to update forward looking statements.

Table 1

Appendix 1 – Sweeney’s & Anomaly 1

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> • <i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i> • <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> • <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> • <i>In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> • Grab samples collected from outcropping mineralisation • Weight of sample was on average 1kg. • Samples sent to ALS, Burnie, TAS and were assayed using a four-acid digest and read by ICP-MS analytical instrument. A total of 48 elements are reported including Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn. Zr. XRF fusion was also completed for the following analytes: Bi, Cu, Pb, Sb, S, Zn, W, As, Sn. • A total of six historic diamond holes were drilled at Anomaly 1 in 1982/83 for a total of 1122.7m. The sample intervals were aligned near lithological contacts to be coincident. • Historical soil samples collected using handheld auger were collected by RGC in 1981. Samples of B-horizon soil were collected from various depths and analysed for Sn As Cu Pb Zn (no analytical method recorded).
Drilling techniques	<ul style="list-style-type: none"> • <i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i> 	<ul style="list-style-type: none"> • All surface drilling by standard wireline diamond drilling. Historic drillholes were collared in NQ before reducing to BQ diameter in competent ground. Company drillholes collared in HQ and drilled NQ2. • Historical data has no information regarding the core orientation procedures recorded. Company drilled holes have been orientated with core orientation by Reflex tool each run.

Table 1**Appendix 1 – Sweeney’s & Anomaly 1**

Criteria	JORC Code explanation	Commentary
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • Based on logs historic diamond core recovery was greater than 99% for all holes. Recovery in Company drillholes is 100% in mineralised zones and >92% for the program to date.
<i>Logging</i>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • Sampling and logging procedures have not been specified in the historical reports however, the geological logging, assays and hole details are all recorded in detail. Drillhole planning and logging was completed by geologists from Renison Consolidated Goldfields (RGC). • Company completed drillholes have been designed, logged, photographed by Octava geologists. Visibly mineralised intervals have been selected for sampling.
<i>Sub-sampling techniques and sample preparation</i>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> 	<ul style="list-style-type: none"> • 1m samples were taken from diamond saw cut drill core. The sampling intervals were aligned to respect geological contacts where appropriate in both historic and Company drillholes.

Table 1**Appendix 1 – Sweeney’s & Anomaly 1**

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	
<i>Quality of assay data and laboratory tests</i>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • The analytical methods have not been specified in the historical reporting. The majority of the analysis was completed by RGC’s lab at the Renison Bell Mine near Zeehan. • No certified reference material or blanks information from drilling campaigns was able to be located from the historic reports. • Company drillhole samples are collected with the following sampling protocols: Appropriate standard every 30 samples, coarse blank every 30 samples, duplicate every 30 samples.
<i>Verification of sampling and assaying</i>	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> • Significant intersections reported by company personnel and an independent consultant. • Historic data was collected by qualified geologists and entered onto paper logging sheets. Qualified geologists entered the original data into MS Excel spreadsheets. • Company data collected with computer into MSEXcel sheets, imported and stored in a database.
<i>Location of data points</i>	<ul style="list-style-type: none"> • <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> 	<ul style="list-style-type: none"> • All grab sample locations surveyed using handheld GPS – Datum is MGA94 Zone 55. • Historical drilling was compiled in local coordinates and converted to GDA94. The

Table 1

Appendix 1 – Sweeney’s & Anomaly 1

Criteria	JORC Code explanation	Commentary
<ul style="list-style-type: none"> • <i>Quality and adequacy of topographic control.</i> 	<p>location of collars has been verified in the field by the author using a handheld Garmin 65 to a working accuracy of +/-1.8m metres.</p> <ul style="list-style-type: none"> • Company drillholes are surveyed with a IMDEX North seeking gyro with 3m station spacing. • Company drillhole collars are surveyed with a handheld Garmin 65 to a working accuracy of +/- 1.8m • The location of historical soil samples is based on conversion from local grid to GDA94 where some error may be expected. 	
<p><i>Data spacing and distribution</i></p>	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • Data spacing and distribution at this stage of exploration drilling is not considered adequate for the estimation of a Mineral Resource. • No composites have been applied to this data. • Historical soil samples were collected at variable spacing down to 30 x 30m.
<p><i>Orientation of data in relation to geological structure</i></p>	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • At this early stage of exploration drilling, and given the complex style of mineralisation, the orientation of drill holes is considered angled relative to the strike of the mineralisation in many cases. • This may have introduces a modest degree of sample bias within the mineralised structures.

Table 1**Appendix 1 – Sweeney’s & Anomaly 1**

Criteria	JORC Code explanation	Commentary
<i>Sample security</i>	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> All sampling packaging and security completed by Octava Minerals personnel, from collection of sample to delivery at laboratory. Sample security for historic drill core samples and soil samples was not documented in the historic reports.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> No audits completed.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the</i> 	<ul style="list-style-type: none"> The Federation project is located 12km west of the town of Zeehan, in Western Tasmania and comprises 2 granted exploration licences EL 16/2023 and EL 1/2023 (final dates: 26/06/2029) covering approximately 121km². The tenements are 100% owned by Octava Minerals Limited.

Criteria	JORC Code explanation	Commentary
	area.	<ul style="list-style-type: none"> All Tenements are in a state of good standing and have no known impediments to operate in the area.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Rock chip samples collected solely completed by Octava Minerals. During the late 1970's RGC were exploring for tin deposits in the South Heemskirk Tin Field. Exploration focussed initially around the Sweeney's adit and surface costeans where a total of 18 holes were drilled between 1977-78. Exploration drilling continued to the ENE at Anomaly 1 based on ground electrical geophysics and surface sampling. total of six historic diamond holes were drilled at Anomaly 1 in 1982/83 for a total of 1122.7m.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The Federation Project Deposit type is considered to be a greisen-style tin and sulphide-rich, feeder-style, steeply-dipping polymetallic mineralisation hosted within Devonian granite.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar 	<ul style="list-style-type: none"> Drillhole details are reported in Appendix 2

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> ● <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	
<p><i>Data aggregation methods</i></p>	<ul style="list-style-type: none"> ● <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i> ● <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> ● <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> ● For diamond drill assay results the intervals reported are thickness-weighted averages. Reported intervals are calculated using a 0.1% cut off grade and using a 1m minimum internal dilution (unless otherwise stated).
<p><i>Relationship between mineralisation widths and intercept lengths</i></p>	<ul style="list-style-type: none"> ● <i>These relationships are particularly important in the reporting of Exploration Results.</i> ● <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> ● <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. ‘down hole length, true width not known’).</i> 	<ul style="list-style-type: none"> ● At this early stage of exploration drilling, the geometry of mineralisation is yet to be fully determined. Consequently down hole lengths are listed, true widths are no known.
<p><i>Diagrams</i></p>	<ul style="list-style-type: none"> ● <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations</i> 	<ul style="list-style-type: none"> ● Figure 1 – Anomaly 1 and Sweeneys Location, Significant drillhole intercepts and new rock chip locations

Criteria	JORC Code explanation	Commentary
	<i>and appropriate sectional views.</i>	
<i>Balanced reporting</i>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • Table 1. Rock chip grab sample locations and selected relevant assays.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • Historical soil sampling results at Anomaly 1 are presented in Figure 1. Simple contouring of the tin results present a coherent anomaly above the anomalous drillhole intercepts and newly reported surface sampling.
<i>Further work</i>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • Diamond drilling strike and depth extensions to mineralisation. • Subsequent downhole EM to test for ‘off-hole’ conductors.

Appendix 2

Table 1. Anomaly 1 - Rock Chip Grab sample locations and selected relevant assays.

Sample	Easting GDA94_z55	Northing GDA94_z55	Ag ppm	Bi ppm	Cu %	Ga ppm	In ppm	Pb %	S %	Sb ppm	Zn %	Sn %
OCTRK016	351259	5358450	74.1	126	0.819	8.2	>500	0.014	14.3	460	12.75	0.61
OCTRK017	351257	5358455	199	2770	0.195	17.3	41.3	0.279	5.65	537	0.24	0.13
OCTRK018	351258	5358474	112	503	0.403	12.5	164	0.071	23.4	348	9.95	0.19

Table 2. Anomaly 1 - Historic Soil Sample locations and grades.

SampleID	X_GDA94z 55	Y_GDA94z 55	As_ppm	Cu_ppm	Pb_ppm	Sn_ppm	Zn_ppm
AG_650E990N	351827	5359000	1150	30	335	460	465
AG_550E9300N	351774	5358945	40	5	20	360	95
AG_650E840N	351888	5358889	610	185	140	600	90
AG_650E900N	351866	5358932	90	20	60	1620	60
AG_750E690N	352053	5358864	-10	4	20	-10	60
AG_650E870N	351878	5358909	200	150	135	1550	45
AG_750E750N	352027	5358909	-10	3	20	-10	45
AG_550E9600N	351759	5358968	20	5	20	235	40
AG_750E660N	352068	5358839	-10	9	20	10	40
AG_550E1020N	351729	5359017	50	10	25	600	35
AG_650E960N	351839	5358978	30	10	20	440	35
AG_550E990N	351745	5358994	70	5	20	380	35
AG_650E1110N	351787	5359076	30	20	15	-10	35
AG_650E1080N	351798	5359059	-10	20	20	-10	30
AG_550E840N	351816	5358874	60	10	15	50	25
AG_650E1020N	351815	5359019	-10	20	30	-10	25
AG_750E870N	351973	5359003	-10	14	15	-10	25
AG_750E840N	351986	5358979	-10	6	10	-10	25
AG_650E720N	351934	5358800	-10	10	5	-10	25
AG_650E930N	351854	5358956	10	5	15	420	20
AG_750E720N	352039	5358885	-10	5	15	10	20
AG_650E810N	351901	5358864	15	20	15	-10	20
AG_750E960N	351931	5359071	-10	3	15	-10	20
AG_750E780N	352016	5358927	-10	6	10	-10	20
AG_750E630N	352083	5358811	-10	5	5	280	15
AG_550E780N	351840	5358834	-10	10	5	10	15
AG_550E810N	351829	5358854	-10	5	5	10	15
AG_750E810N	352003	5358952	-10	4	15	-10	15
AG_650E660N	351960	5358757	-10	5	10	-10	15
AG_725E1020	351867	5359084	10	15	5	-10	15
AG_725E900N	351923	5358996	60	10	5	-10	15
AG_650E630N	351972	5358733	-10	5	5	-10	15
AG_550E870N	351800	5358899	10	10	5	85	10
AG_750E930N	351945	5359048	10	2	-5	10	10
AG_650E1050N	351804	5359042	-10	5	10	-10	10
AG_650E750N	351924	5358822	-10	5	10	-10	10
AG_750E990N	351917	5359095	-10	2	10	-10	10
AG_550E900N	351788	5358921	-10	5	5	-10	10
AG_650E690N	351945	5358779	-10	5	5	-10	10
AG_650E780N	351916	5358841	-10	5	5	-10	10

AG_750E900N	351959	5359026	-10	4	5	-10	10
AG_750E1110N	351866	5359186	-10	2	5	-10	10
AG_725E840N	351950	5358951	50	5	-5	40	5
AG_725E930N	351910	5359017	30	-5	5	35	5
AG_725E990N	351880	5359064	75	10	5	30	5
AG_725E810N	351966	5358929	30	-5	5	30	5
AG_725E870N	351938	5358971	20	-5	-5	30	5
AG_725E960N	351897	5359038	70	5	10	10	5
AG_600E930N	351825	5358935		10	45	1820	
AG_700E900N	351905	5358953		75	190	1370	
AG_600E900N	351838	5358914		30	120	1220	
AG_700E960N	351878	5358998		25	30	1000	
AG_700E840N	351930	5358908		30	100	850	
AG_700E870N	351915	5358931		30	90	830	
AG_600E870N	351850	5358894		100	95	800	
AG_700E930N	351891	5358977		30	80	740	
AG_00E630N	351383	5358418		10	40	715	
AG_600E960N	351814	5358958		5	15	550	
AG_00E600N	351401	5358399		20	20	215	
AG_900E990N	352005	5359180		-5	-10	200	
AG_900E810N	352087	5359034		-5	10	180	
AG_700E810N	351941	5358889		45	60	170	
AG_00E840N	351281	5358575		10	10	165	
AG_300E1110N	351464	5358947		15	20	160	
AG_600E990N	351805	5358977		10	30	150	
AG_00E690N	351357	5358457		30	25	150	
AG_700E1080N	351826	5359088		-5	-10	120	
AG_00E540N	351429	5358353		-5	10	115	
AG_900E600N	352186	5358864		5	25	100	
AG_600E600N	351956	5358697		-5	-10	100	
AG_700E990N	351864	5359021		10	50	70	
AG_600E570N	351965	5358677		10	10	70	
AG_800E1110N	351880	5359222		10	10	60	
AG_700E1110N	351813	5359109		-5	10	60	
AG_700E1020N	351854	5359042		10	50	50	
AG_800E870N	351987	5359027		5	35	50	
AG_800E960N	351950	5359097		10	30	50	
AG_400E870N	351659	5358803		5	30	50	
AG_700E1140N	351801	5359130		5	25	50	
AG_700E1050N	351841	5359064		-5	10	50	
AG_700E1170N	351793	5359151		5	-10	50	
AG_00E510N	351439	5358329		50	150	45	
AG_500E930N	351714	5358916		-5	-10	45	
AG_800E810N	352018	5358977		10	65	40	
AG_800E750N	352039	5358933		10	30	40	

AG_700E780N	351954	5358866		5	40	30	
AG_800E720N	352057	5358906		10	30	30	
AG_600E1020N	351793	5358999		5	30	30	
AG_800E600N	352111	5358810		-5	15	30	
AG_00E720N	351337	5358487		35	10	30	
AG_700E570N	352041	5358709		-5	10	30	
AG_00E660N	351370	5358439		10	30	25	
AG_900E540N	352215	5358813		10	100	20	
AG_800E780N	352031	5358953		10	80	20	
AG_800E990N	351932	5359125		10	20	20	
AG_900E630N	352172	5358889		5	20	20	
AG_900E780N	352104	5359010		5	20	20	
AG_100E720N	351433	5358569		5	10	20	
AG_600E840N	351862	5358872		5	10	20	
AG_100E600N	351487	5358467		-5	10	20	
AG_700E690N	351991	5358799		-5	10	20	
AG_900E1050N	351977	5359228		-5	10	20	
AG_600E1050N	351780	5359020		10	5	20	
AG_100E1080N	351270	5358875		5	-10	20	
AG_100E750N	351422	5358594		5	-10	20	
AG_100E840N	351381	5358669		5	-10	20	
AG_400E750N	351705	5358715		5	-10	20	
AG_200E1140N	351381	5358914		-5	-10	20	
AG_300E870N	351566	5358760		-5	-10	20	
AG_500E900N	351727	5358892		-5	-10	20	
AG_500E1050N	351663	5359009		-5	-10	15	
AG_500E840N	351754	5358844		-5	-10	15	
AG_500E990N	351691	5358964		-5	-10	15	
AG_800E630N	352096	5358835		10	90	10	
AG_900E660N	352156	5358915		5	25	10	
AG_100E540N	351516	5358417		5	20	10	
AG_300E750N	351613	5358670		5	20	10	
AG_900E690N	352142	5358942		5	20	10	
AG_600E660N	351930	5358742		-5	15	10	
AG_400E660N	351742	5358649		25	10	10	
AG_00E810N	351295	5358552		5	10	10	
AG_100E1020N	351297	5358826		5	10	10	
AG_100E690N	351448	5358544		5	10	10	
AG_100E990N	351312	5358798		5	10	10	
AG_200E840N	351418	5358842		5	10	10	
AG_300E720N	351625	5358647		5	10	10	
AG_300E780N	351600	5358690		5	10	10	
AG_400E1170N	351537	5359029		5	10	10	
AG_400E840N	351671	5358782		5	10	10	
AG_600E750N	351897	5358803		5	10	10	

AG_100E780N	351406	5358620		-5	10	10	
AG_200E780N	351527	5358636		-5	10	10	
AG_300E540N	351704	5358503		-5	10	10	
AG_400E1020N	351595	5358914		-5	10	10	
AG_400E1050N	351583	5358939		-5	10	10	
AG_400E540N	351792	5358556		-5	10	10	
AG_700E600N	352029	5358735		-5	10	10	
AG_700E660N	352005	5358776		-5	10	10	
AG_700E630N	352016	5358755		-5	5	10	
AG_700E720N	351979	5358823		-5	5	10	
AG_800E570N	352125	5358786		15	-10	10	
AG_100E810N	351393	5358645		5	-10	10	
AG_100E870N	351365	5358699		5	-10	10	
AG_200E540N	351622	5358451		5	-10	10	
AG_300E1020N	351501	5358878		5	-10	10	
AG_300E1140N	351453	5358970		5	-10	10	
AG_300E660N	351650	5358599		5	-10	10	
AG_300E900N	351550	5358786		5	-10	10	
AG_300E990N	351516	5358852		5	-10	10	
AG_800E1080N	351896	5359201		5	-10	10	
AG_200E1110N	351393	5358889		-5	-10	10	
AG_200E1170N	351370	5358934		-5	-10	10	
AG_200E660N	351591	5358518		-5	-10	10	
AG_200E720N	351538	5358614		-5	-10	10	
AG_200E870N	351440	5358799		-5	-10	10	
AG_200E900N	351451	5358776		-5	-10	10	
AG_300E1080N	351474	5358926		-5	-10	10	
AG_300E840N	351580	5358737		-5	-10	10	
AG_400E570N	351780	5358577		-5	-10	10	
AG_100E960N	351324	5358772		450	100	-10	
AG_800E840N	352003	5359003		5	40	-10	
AG_900E570N	352201	5358841		5	35	-10	
AG_600E1080N	351770	5359043		-5	30	-10	
AG_800E690N	352070	5358884		15	25	-10	
AG_900E1110N	351951	5359276		10	25	-10	
AG_900E870N	352063	5359081		10	25	-10	
AG_100E1050N	351284	5358848		55	20	-10	
AG_400E1080N	351575	5358962		25	20	-10	
AG_00E780N	351310	5358528		10	20	-10	
AG_800E660N	352084	5358860		10	20	-10	
AG_800E900N	351976	5359053		10	20	-10	
AG_600E720N	351912	5358782		5	20	-10	
AG_900E750N	352115	5358987		5	20	-10	
AG_800E1140N	351866	5359245		10	15	-10	
AG_900E840N	352076	5359059		5	15	-10	

AG_600E780N	351888	5358824		-5	15	-10	
AG_00E750N	351323	5358507		10	10	-10	
AG_400E1140N	351550	5359003		10	10	-10	
AG_800E930N	351963	5359076		10	10	-10	
AG_100E570N	351501	5358444		5	10	-10	
AG_100E630N	351475	5358491		5	10	-10	
AG_100E660N	351459	5358520		5	10	-10	
AG_100E900N	351353	5358723		5	10	-10	
AG_200E1020N	351475	5358730		5	10	-10	
AG_200E570N	351609	5358474		5	10	-10	
AG_400E1110N	351561	5358982		5	10	-10	
AG_400E720N	351718	5358693		5	10	-10	
AG_400E780N	351698	5358736		5	10	-10	
AG_400E810N	351683	5358758		5	10	-10	
AG_400E930N	351635	5358847		5	10	-10	
AG_500E570N	351868	5358636		5	10	-10	
AG_600E1140N	351748	5359083		5	10	-10	
AG_800E1020N	351918	5359150		5	10	-10	
AG_900E1080N	351963	5359254		5	10	-10	
AG_900E720N	352131	5358965		5	10	-10	
AG_900E900N	352047	5359106		5	10	-10	
AG_100E510N	351531	5358390		-5	10	-10	
AG_100E930N	351339	5358748		-5	10	-10	
AG_200E600N	351599	5358498		-5	10	-10	
AG_200E630N	351562	5358568		-5	10	-10	
AG_200E810N	351515	5358657		-5	10	-10	
AG_200E990N	351503	5358679		-5	10	-10	
AG_300E930N	351540	5358805		-5	10	-10	
AG_400E600N	351766	5358603		-5	10	-10	
AG_400E900N	351646	5358824		-5	10	-10	
AG_400E960N	351622	5358870		-5	10	-10	
AG_400E990N	351609	5358895		-5	10	-10	
AG_500E540N	351881	5358613		-5	10	-10	
AG_500E660N	351827	5358706		-5	10	-10	
AG_500E780N	351779	5358798		-5	10	-10	
AG_500E810N	351765	5358823		-5	10	-10	
AG_800E1050N	351909	5359173		-5	10	-10	
AG_900E1020N	351991	5359203		-5	10	-10	
AG_600E810N	351875	5358848		5	5	-10	
AG_600E1110N	351758	5359065		25	-10	-10	
AG_00E570N	351414	5358376		15	-10	-10	
AG_300E630N	351665	5358574		10	-10	-10	
AG_00E870N	351267	5358596		5	-10	-10	
AG_300E1050N	351487	5358902		5	-10	-10	
AG_300E570N	351691	5358528		5	-10	-10	

AG_300E690N	351642	5358620		5	-10	-10	
AG_300E960N	351528	5358827		5	-10	-10	
AG_600E630N	351943	5358718		5	-10	-10	
AG_200E1050N	351428	5358822		-5	-10	-10	
AG_200E1080N	351408	5358865		-5	-10	-10	
AG_200E690N	351576	5358543		-5	-10	-10	
AG_200E750N	351548	5358593		-5	-10	-10	
AG_200E930N	351466	5358753		-5	-10	-10	
AG_200E960N	351490	5358704		-5	-10	-10	
AG_300E600N	351678	5358551		-5	-10	-10	
AG_300E810N	351593	5358712		-5	-10	-10	
AG_400E630N	351757	5358624		-5	-10	-10	
AG_400E690N	351730	5358671		-5	-10	-10	
AG_500E1020N	351678	5358987		-5	-10	-10	
AG_500E1080N	351653	5359031		-5	-10	-10	
AG_500E1110N	351640	5359054		-5	-10	-10	
AG_500E1140N	351627	5359079		-5	-10	-10	
AG_500E600N	351854	5358662		-5	-10	-10	
AG_500E630N	351839	5358685		-5	-10	-10	
AG_500E690N	351815	5358733		-5	-10	-10	
AG_500E720N	351804	5358756		-5	-10	-10	
AG_500E960N	351700	5358942		-5	-10	-10	
AG_600E690N	351920	5358763		-5	-10	-10	
AG_700E750N	351969	5358842		-5	-10	-10	
AG_800E540N	352140	5358761		-5	-10	-10	
AG_900E930N	352032	5359129		-5	-10	-10	
AG_900E960N	352019	5359155		-5	-10	-10	
AG_900E1140N	351933	5359302			-10	-10	
AG_500E750N	351793	5358776					
AG_500E870N	351740	5358870					
AG_725E780N	351979	5358907					

Table 3. Anomaly 1 - Historical Drillhole Data

BHID	GDA94 Easting	GDA94 Northing	RL (m)	Dip (deg)	Azimuth (True North)	Length (m)	Comments
FED20	351841	5358885	315.2	-47	26	158.2	37m @ 0.26% Sn 0.21% Cu 0.003% Pb 0.86% Zn 33g/t Ag 7% S from 30m including 8m @ 0.68% Cu, 0.72% Sn, 3.09% Zn, 122g/t Ag from 30m
FED21	351918	5358896	288.6	-53.7	323	117	16m @ 0.54% Sn 0.01% Cu 0.01% Pb 0.02% Zn from 34m
FED22	351878	5358867	313	-74	9	230.5	
FED23	351846	5358791	299.3	-41	36	232.8	
FED24	351779	5358966	348.1	-53	119	186	23m @ 0.55% Sn from 79m