

New Copper/ Gold drill targets identified

- **G11 Resources Ltd (G11) has recently commenced a systematic modern day exploration program comprising both diamond drilling (now underway at Zig Zag) and geophysics in the under explored northern extent of the Great Lyell fault in Tasmania's Mr Read volcanic belt.**
- **This under explored strike extent has the same structure and stratigraphic sequence that hosts the ore bodies that comprise the world class Mt Lyell mine. (Refer Figure 1 below)**
- **A recently completed geophysical review of the northern portion of the newly acquired EL6/2024 (Linda Project) in Tasmania's Mt Read volcanic belt has now defined new EM anomalies providing G11 with additional copper-gold drill targets.**
- **These anomalies are located in the Comstock valley area and represent compelling additional new drill targets due to their location near an interpreted juncture in the Great Lyell fault along strike from the Copper Chert ore body¹.**

G11 Resources Ltd ('the Company' or 'G11 Resources') is pleased to advise on the definition of new drill targets in the Comstock valley area in the northern portion of its newly acquired Linda project (EL6/2024). These new drill targets are in addition to its Zig Zag anomaly that is currently being drill tested with an approximate 2400m diamond drilling program (Refer to ASX Release 4 February 2026).

The Great Lyell fault is the main structural control within the Mt Read volcanics that gives rise to the numerous ore bodies that comprise the Mt Lyell Copper / Gold mine next to Queenstown in Tasmania. This structure is very poorly explored along strike to the north in G11 Resources ground with no modern exploration and very few historic drill holes.

The Mt Lyell Copper/ Gold Mine is owned by Sibanye Stillwater (JSE:SSW, NYSE: SWSW) and is currently under care and maintenance. A feasibility study into the best option for the re-establishment of the mining operation is underway. Mt Lyell is comprised of multiple ore bodies that are part of a very large mineralised system along the Great Lyell fault in Tasmania's Mt Read volcanics. Mt Lyell itself is comprised of at least six individual ore bodies (refer to Figure 1).

In addition to the current drill program, the Company's technical team has systematically worked through extensive geophysical data along the Great Lyell fault, within its current tenement holdings, that surround Mt Lyell and have now identified more copper/ gold drill targets in this under explored region.

These new targets are EM (Electro Magnetic) anomalies that sit at a juncture of the Great Lyell Fault (along strike to the Copper Chert ore body¹) and along an interpreted northwest-southeast fault. The location of these EM anomalies is important to hosting mineralisation in the area, within the under explored Comstock valley just north of the Mt Lyell Copper-Gold mine.

The company will apply for drill approvals with Mineral Resources Tasmania (MRT) as soon as possible to test these new targets.

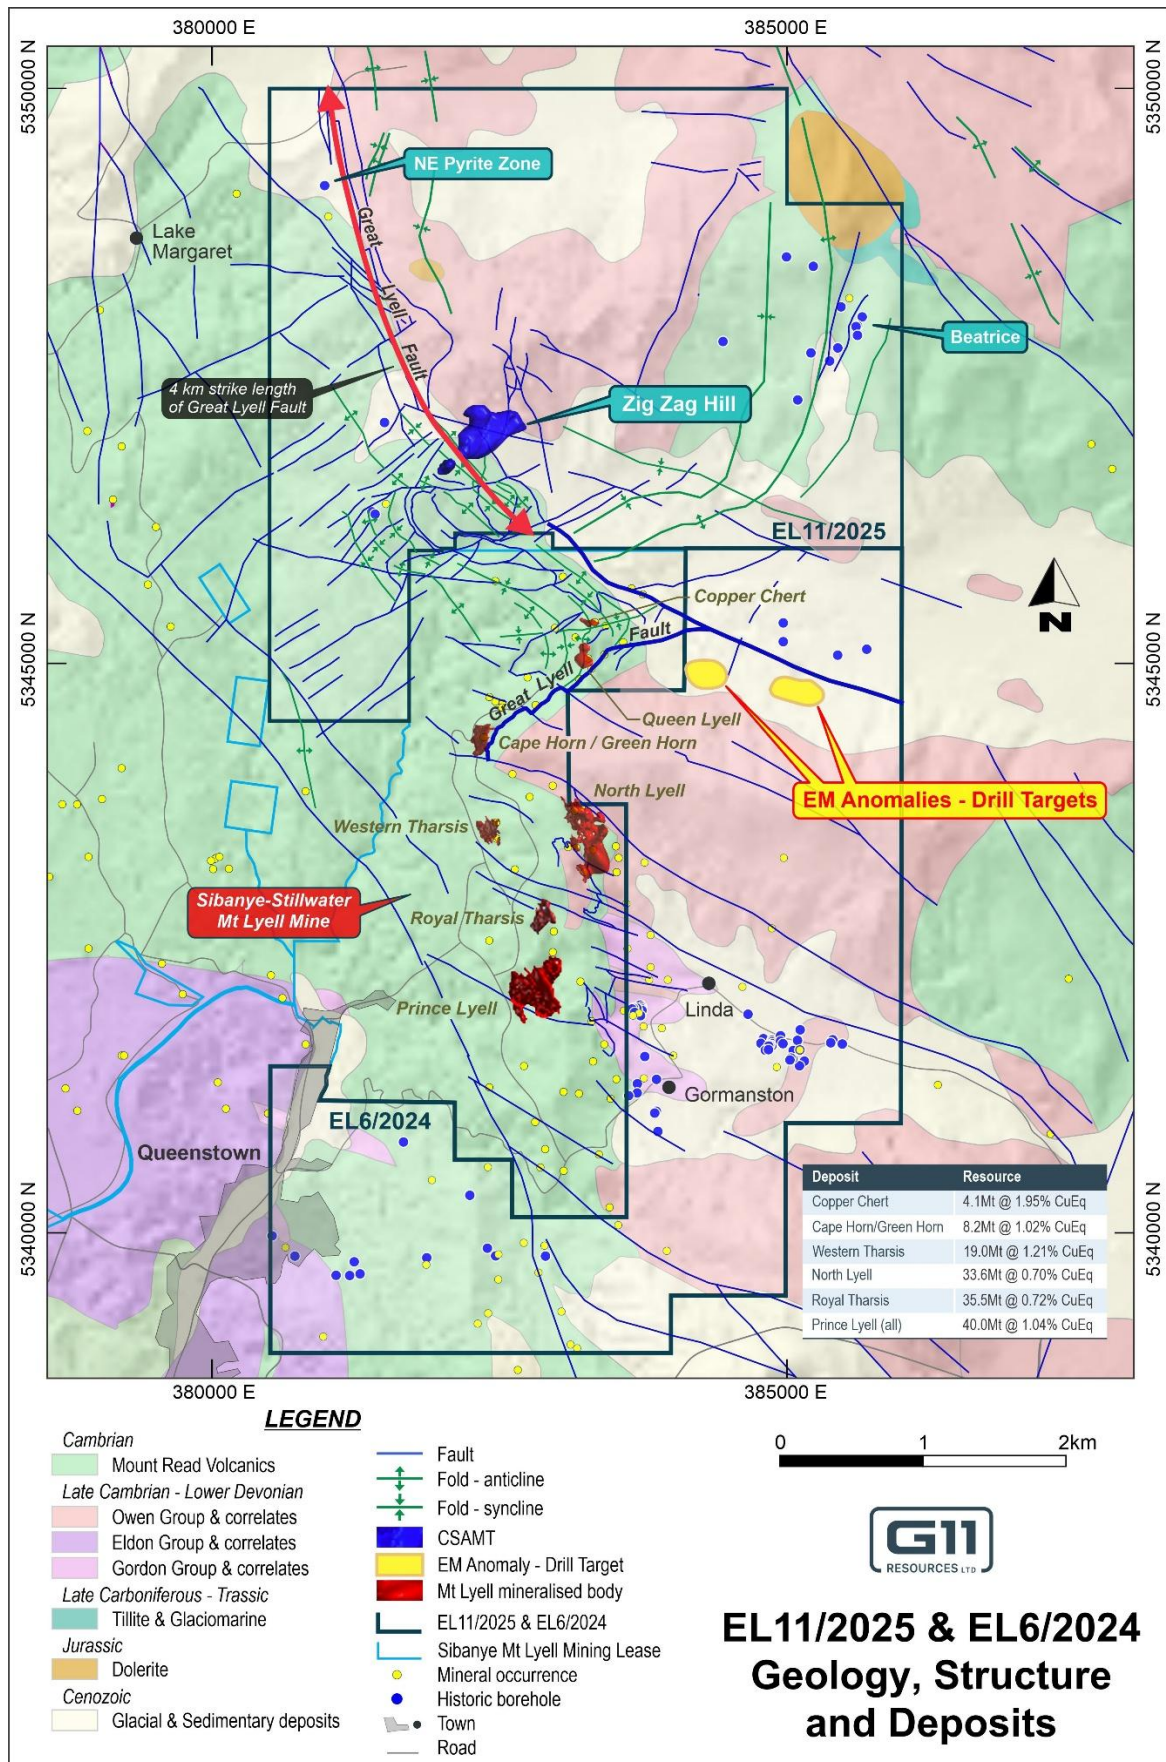



Figure 1. G11 Resources tenements showing geophysical drill targets overlaid on geology, structure and the adjacent deposits that comprise the Mt Lyell Mine¹.

The following announcements contain further information, Competent Person's Consent, material assumptions and technical parameters concerning historical work:

¹ Refer to New Century Resources ASX announcement 23/01/2023 – Mt Lyell Copper Mine Prefeasibility Study.

Proximate Statements

This announcement contains references to JORC Mineral Resources derived by other parties either nearby or proximate to the Project and includes references to topographical or geological similarities of that of the Project. It is important to note that such discoveries or geological similarities do not in any way guarantee that the Company will have any success or similar successes in delineating a JORC compliant Mineral Resource on the Project, if at all.

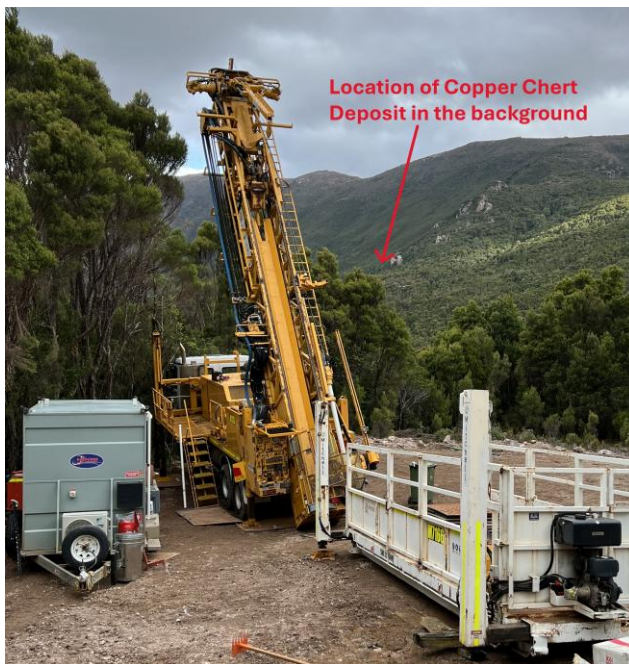

Images 1 and 2 - Photograph showing diamond rig onsite drilling the Zig Zag anomaly with location of Copper Chert deposit in background

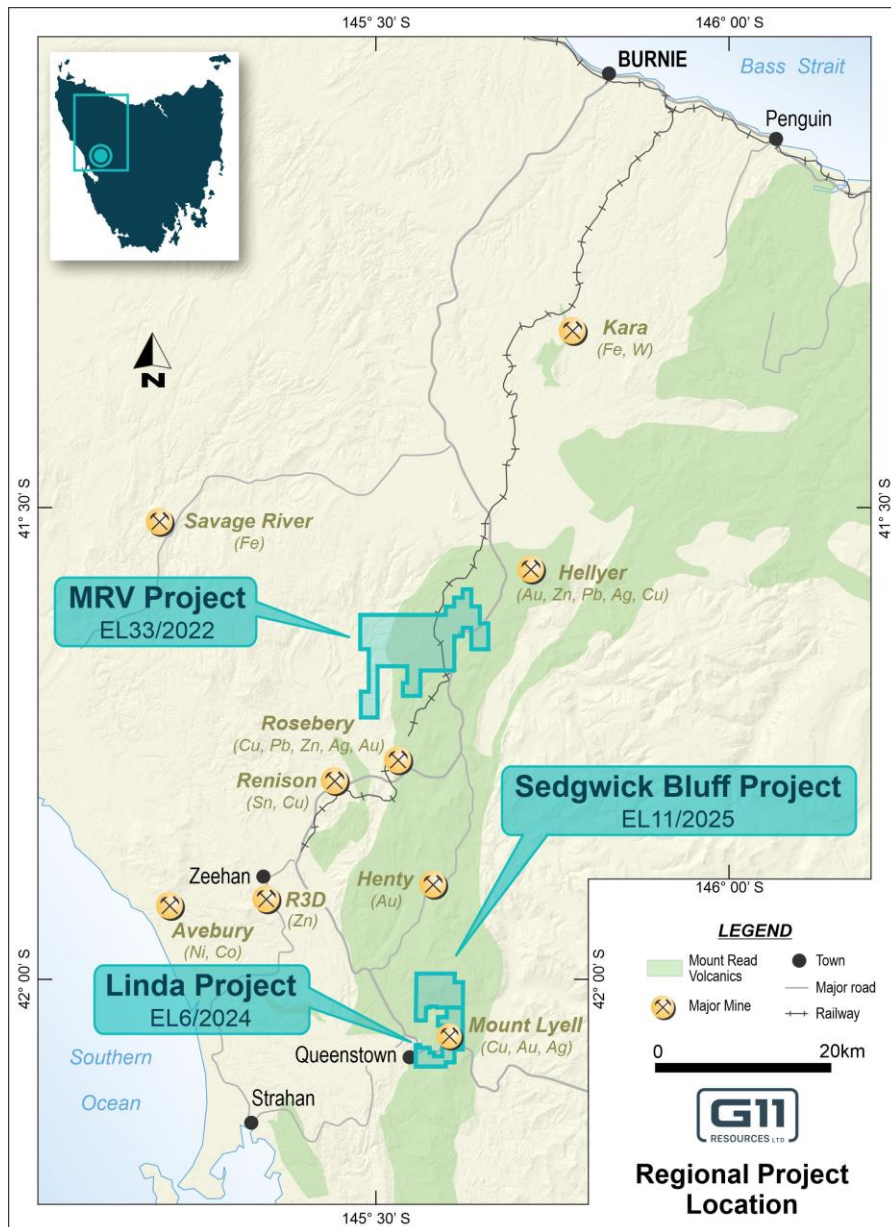


Figure 3: Regional Location Plan of Sedgwick Bluff EL11/2025, MRV EL33/2022 and Linda EL6/2024 in relation to major western Tasmania Mines

ABOUT TASMANIA AND THE MT READ VOLCANIC BELT

Tasmania's Mt Read Volcanic belt is home to a world class mineral endowment and has mines such as Mt Lyell (Cu, Au), Henty (Au), Roseberry (Zn, Pb, Cu, Ag, Au), Hellyer (Zn, Pb, Cu, Ag, Au), and Renison Bell (Sn). The Mt Read Volcanic belt still remains largely underexplored predominantly due to access. Mining is the largest contributor to Tasmania's GDP and western Tasmania's economy is highly reliant on mining and mineral exploration. The state government is highly supportive of the mining and exploration industry. Significantly Tasmania is powered 100% by renewable energy.

This announcement has been approved for release by the Board of Directors of G11 Resources Ltd.

-ENDS-



For further information, please visit www.g11resources.com.au or contact:

G11 Resources Ltd

E: info@g11resources.com.au

Competent Person Statement

The information in this report that relates to Exploration Results is an accurate representation of the available data and is based on information compiled by Mr Andrew Radonjic who is a Member of the AusIMM. Mr Radonjic is a full time employee of G11 Resources Limited. Mr Radonjic has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person (CP) as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC). "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Radonjic consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary																																																																																																				
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sounds, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	- No subsurface sampling has been undertaken for this current announcement. - Sampling techniques are limited to a heli-borne Versatile Time Domain Electromagnetic (VTEM) survey undertaken by Geotech Airborne Pty Ltd in Jan-Mar 2011 for Corona Gold Limited, across two blocks. The tables below show the line spacings/orientations as well as the system specifications: - Survey block specifications: <table><tr><th>Survey block</th><th>Line spacing (m)</th><th>Line-km (contractual)</th><th>Line-km (delivered)</th><th>Flight direction</th><th>Line number</th></tr><tr><td>Block 1</td><td>250</td><td>849</td><td>815</td><td>090 – 270</td><td>L10010 – L12350</td></tr><tr><td>Block 2</td><td>250</td><td>N/A</td><td>111</td><td>000 - 180</td><td>L20010 – L20200</td></tr></table> - System Specifications: <table><tr><th colspan="2">Survey Helicopter</th></tr><tr><td>Model</td><td>AS 350 B3</td></tr><tr><td>Registration</td><td>VH-VTX</td></tr><tr><td>Nominal survey speed</td><td>80 km/h</td></tr><tr><td>Nominal terrain clearance</td><td>80 m</td></tr><tr><th colspan="2">VTEM Transmitter</th></tr><tr><td>Coil diameter</td><td>26 m</td></tr><tr><td>Number of turns</td><td>4</td></tr><tr><td>Pulse repetition rate</td><td>25 Hz</td></tr><tr><td>Peak current</td><td>200 Amp</td></tr><tr><td>Duty cycle</td><td>42%</td></tr><tr><td>Peak dipole moment</td><td>425,000 NIA</td></tr><tr><td>Pulse width</td><td>8.33 ms</td></tr><tr><td>Nominal terrain clearance</td><td>48 m</td></tr><tr><th colspan="2">VTEM Receiver</th></tr><tr><td>Coil diameter</td><td>1.2 metre</td></tr><tr><td>Number of turns</td><td>100</td></tr><tr><td>Effective area</td><td>113.1 m²</td></tr><tr><td>Sampling interval</td><td>0.1 s</td></tr><tr><td>Nominal terrain clearance</td><td>48 m</td></tr><tr><th colspan="2">Magnetometer</th></tr><tr><td>Type</td><td>Geometrics</td></tr><tr><td>Model</td><td>Optically pumped cesium vapour</td></tr><tr><td>Sensitivity</td><td>0.02 nT</td></tr><tr><td>Sampling interval</td><td>0.1 s</td></tr><tr><td>Cable length</td><td>13 m</td></tr><tr><td>Nominal terrain clearance</td><td>71 m</td></tr><tr><th colspan="2">Radar Altimeter</th></tr><tr><td>Type</td><td>Terra TRA 3000/TRI 40</td></tr><tr><td>Position</td><td>Beneath cockpit</td></tr><tr><td>Sampling interval</td><td>0.2 s</td></tr><tr><th colspan="2">GPS navigation system</th></tr><tr><td>Type</td><td>NovAtel</td></tr><tr><td>Model</td><td>WAAS enabled OEM4-G2-3151W</td></tr><tr><td>Antenna position</td><td>Helicopter tail</td></tr><tr><td>Sampling interval</td><td>0.2 s</td></tr><tr><th colspan="2">Base Station Magnetometer/GPS</th></tr><tr><td>Type</td><td>Geometrics</td></tr><tr><td>Model</td><td>Cesium vapour</td></tr><tr><td>Sensitivity</td><td>0.001 nT</td></tr><tr><td>Sampling interval</td><td>1 s</td></tr></table>	Survey block	Line spacing (m)	Line-km (contractual)	Line-km (delivered)	Flight direction	Line number	Block 1	250	849	815	090 – 270	L10010 – L12350	Block 2	250	N/A	111	000 - 180	L20010 – L20200	Survey Helicopter		Model	AS 350 B3	Registration	VH-VTX	Nominal survey speed	80 km/h	Nominal terrain clearance	80 m	VTEM Transmitter		Coil diameter	26 m	Number of turns	4	Pulse repetition rate	25 Hz	Peak current	200 Amp	Duty cycle	42%	Peak dipole moment	425,000 NIA	Pulse width	8.33 ms	Nominal terrain clearance	48 m	VTEM Receiver		Coil diameter	1.2 metre	Number of turns	100	Effective area	113.1 m²	Sampling interval	0.1 s	Nominal terrain clearance	48 m	Magnetometer		Type	Geometrics	Model	Optically pumped cesium vapour	Sensitivity	0.02 nT	Sampling interval	0.1 s	Cable length	13 m	Nominal terrain clearance	71 m	Radar Altimeter		Type	Terra TRA 3000/TRI 40	Position	Beneath cockpit	Sampling interval	0.2 s	GPS navigation system		Type	NovAtel	Model	WAAS enabled OEM4-G2-3151W	Antenna position	Helicopter tail	Sampling interval	0.2 s	Base Station Magnetometer/GPS		Type	Geometrics	Model	Cesium vapour	Sensitivity	0.001 nT	Sampling interval	1 s
Survey block	Line spacing (m)	Line-km (contractual)	Line-km (delivered)	Flight direction	Line number																																																																																																	
Block 1	250	849	815	090 – 270	L10010 – L12350																																																																																																	
Block 2	250	N/A	111	000 - 180	L20010 – L20200																																																																																																	
Survey Helicopter																																																																																																						
Model	AS 350 B3																																																																																																					
Registration	VH-VTX																																																																																																					
Nominal survey speed	80 km/h																																																																																																					
Nominal terrain clearance	80 m																																																																																																					
VTEM Transmitter																																																																																																						
Coil diameter	26 m																																																																																																					
Number of turns	4																																																																																																					
Pulse repetition rate	25 Hz																																																																																																					
Peak current	200 Amp																																																																																																					
Duty cycle	42%																																																																																																					
Peak dipole moment	425,000 NIA																																																																																																					
Pulse width	8.33 ms																																																																																																					
Nominal terrain clearance	48 m																																																																																																					
VTEM Receiver																																																																																																						
Coil diameter	1.2 metre																																																																																																					
Number of turns	100																																																																																																					
Effective area	113.1 m²																																																																																																					
Sampling interval	0.1 s																																																																																																					
Nominal terrain clearance	48 m																																																																																																					
Magnetometer																																																																																																						
Type	Geometrics																																																																																																					
Model	Optically pumped cesium vapour																																																																																																					
Sensitivity	0.02 nT																																																																																																					
Sampling interval	0.1 s																																																																																																					
Cable length	13 m																																																																																																					
Nominal terrain clearance	71 m																																																																																																					
Radar Altimeter																																																																																																						
Type	Terra TRA 3000/TRI 40																																																																																																					
Position	Beneath cockpit																																																																																																					
Sampling interval	0.2 s																																																																																																					
GPS navigation system																																																																																																						
Type	NovAtel																																																																																																					
Model	WAAS enabled OEM4-G2-3151W																																																																																																					
Antenna position	Helicopter tail																																																																																																					
Sampling interval	0.2 s																																																																																																					
Base Station Magnetometer/GPS																																																																																																						
Type	Geometrics																																																																																																					
Model	Cesium vapour																																																																																																					
Sensitivity	0.001 nT																																																																																																					
Sampling interval	1 s																																																																																																					

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
		- As an adjunct to the VTEM survey, Southern Geoscience Consultants (SGC) were contracted by Corona Gold Limited at the time, to act as project managers and data processors for the VTEM data. As part of the data processing workflow, SGC calculated a Conductivity-Depth inversion (CDI). The results of their work produced images, contours, stacked profiles, flight path and grids of the VTEM data, as well as Multiplots and depth slices from the CDI. - G11 and their consultant geophysicist have analysed these various products in 3D and have used one of the CDI depth slices (450m), to generate modelled conductivity anomalies at depth beneath the project which have been the basis for the interpreted drill targets shown in Figure 1.
Drilling Techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i>	No drilling results have been included in this ASX Release.
Drill Sample Recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No drilling results have been included in this ASX Release.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i>	No drilling results have been included in this ASX Release.

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	• No drilling results have been included in this ASX Release.
Quality of assay data and laboratory tests	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	• No drilling results have been included in this ASX Release.
Verification of sampling and assaying	• The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data.	• No drilling results have been included in this ASX Release.
Location of data points	• Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control.	• The grid system used was GDA94 Zone 55S.

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	- The 2011 VTEM survey undertaken by Geotech Airborne Pty Ltd in Jan-Mar 2011 for Corona Gold Limited and Southern Geoscience Consultants (SGC) was flown across two blocks. A total of 926 line km were flown, with line spacing of 250 m with a nominal terrain clearance of 48 m. - These survey configurations are considered adequate to support interpolation of sub-surface geophysical features at a medium to coarse resolution.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	- The 2011 VTEM survey used flight lines oriented 090-270 and 000-180 across Blocks 1 and 2 respectively. - The geological strike is interpreted to be structurally complex with folded fault architecture that varies from approximately N-S orientation (e.g. Great Lyell Fault) to approximately ESE (e.g. major fault splays). - These survey configurations are considered adequate to support interpretation of sub-surface geophysical features of variable orientations in 3D.
Sample security	<i>The measures taken to ensure sample security.</i>	No samples were collected.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	A review of the survey parameters and results obtained from the VTEM survey has been completed by Geokincern Pty Ltd.

Section 2: Reporting of Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	- The Linda Project is located within the Mt Read Volcanics in Western Tasmania, directly to the east and south of the Mt Lyell Mining Centre. The project is made up of one granted exploration (EL6/2024) held by Iltani Resources Limited (ASX: ILT) which was part of the acquisition announced on 22 December 2025, where the Company entered into a Tenement Sale Agreement with Iltani Resources Limited (ASX: ILT) for the acquisition of two tenements including EL6/2024. - There are no encumbrances or royalties over the tenements - There is no native title in place. The tenement is in good standing.

Section 2: Reporting of Results

Criteria	JORC Code explanation	Commentary																												
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	The Linda Bluff licence (formerly EL 21/2010) has had a long exploration history involving major explorers such as Lyell Picklands, Goldfields Exploration, Mount Lyell Mining and Railway, and Copper Mines of Tasmania. Exploration began in 1957 and has focused on targeting extensions to the Mount Lyell style of base metal and gold mineralisation within the Mount Read Volcanics. The historical work programs are summarised in the table below. <table><tr><th>Period</th><th>Company</th><th>Exploration Activities</th><th>Outcomes / Notes</th></tr><tr><td>1957-1961</td><td>Lyell E.Z</td><td>Turam E.M and IP surveys over the Great Lyell area and then follow-up drilling.</td><td>Targets were tested by five drill-holes (GL1-5) in 1961 with best assay in hole GL2 returned 1.5m @ 0.8% Cu.</td></tr><tr><td>1967–1970</td><td>Picklands Mather, Placer Exploration Ltd & Mount Lyell Mining and Railway (MLMR)</td><td>Picklands completed stream sediment sampling, soil sampling, EM, IP, ground magnetics regional exploration in the Roaring Meg area and Placer did an S.P survey at Gormanston. MLMR did follow-up drilling at Gormanston.</td><td>Picklands drilled 8 diamond holes (only 5 reached the target depth :RM201-205). Best reported intersection was 1.5m @ 0.49% Cu, 9 g/t Ag in RM201. Placer received several small chargeable anomalies. Two diamond drill holes were completed by MLMR in 1968, no results reported.</td></tr><tr><td>1970–1980</td><td>Mount Lyell Mining and Railway</td><td>Geological mapping, I.P, ground magnetics and drilling.</td><td>69 anomalies were identified and several extensive I.P. zones were delineated. A ten hole diamond drilling program was recommended but was not completed.</td></tr><tr><td>1980–1990</td><td>Goldfields Exploration</td><td>Geological mapping and trench sampling in the adits and then drilling.</td><td>Little Owen adits returned a significant gold zone 16m wide with the best trench sample returning 5.7m @ 6.2 g/t Au. Two diamond holes were drilled (LO1 and LO2) to test beneath the mineralised trench sampling and intersected 14m @ 0.13g/t Au in LO1 and 21m @ 0.3 g/t Au in LO2.</td></tr><tr><td>1994–1998</td><td>Copper Mines of Tasmania (CMT)</td><td>Costeaning at Cemetery Creek. CSAMT line over the Chamouni Zinc prospect. Both prospects had follow-up drilling.</td><td>Costean returned 10m @ 1% Zn. Followed up with two RC drill holes with best intersection of 12m @ 2.4% Zn. CSAMT anomaly was tested by an RC drill hole with a Diamond tail but was not explained.</td></tr><tr><td>2003–2006</td><td>Copper Mines of Tasmania</td><td>CSAMT survey</td><td>A moderate anomaly was recorded in the area of the Copper estates prospect.</td></tr></table>	Period	Company	Exploration Activities	Outcomes / Notes	1957-1961	Lyell E.Z	Turam E.M and IP surveys over the Great Lyell area and then follow-up drilling.	Targets were tested by five drill-holes (GL1-5) in 1961 with best assay in hole GL2 returned 1.5m @ 0.8% Cu.	1967–1970	Picklands Mather, Placer Exploration Ltd & Mount Lyell Mining and Railway (MLMR)	Picklands completed stream sediment sampling, soil sampling, EM, IP, ground magnetics regional exploration in the Roaring Meg area and Placer did an S.P survey at Gormanston. MLMR did follow-up drilling at Gormanston.	Picklands drilled 8 diamond holes (only 5 reached the target depth :RM201-205). Best reported intersection was 1.5m @ 0.49% Cu, 9 g/t Ag in RM201. Placer received several small chargeable anomalies. Two diamond drill holes were completed by MLMR in 1968, no results reported.	1970–1980	Mount Lyell Mining and Railway	Geological mapping, I.P, ground magnetics and drilling.	69 anomalies were identified and several extensive I.P. zones were delineated. A ten hole diamond drilling program was recommended but was not completed.	1980–1990	Goldfields Exploration	Geological mapping and trench sampling in the adits and then drilling.	Little Owen adits returned a significant gold zone 16m wide with the best trench sample returning 5.7m @ 6.2 g/t Au. Two diamond holes were drilled (LO1 and LO2) to test beneath the mineralised trench sampling and intersected 14m @ 0.13g/t Au in LO1 and 21m @ 0.3 g/t Au in LO2.	1994–1998	Copper Mines of Tasmania (CMT)	Costeaning at Cemetery Creek. CSAMT line over the Chamouni Zinc prospect. Both prospects had follow-up drilling.	Costean returned 10m @ 1% Zn. Followed up with two RC drill holes with best intersection of 12m @ 2.4% Zn. CSAMT anomaly was tested by an RC drill hole with a Diamond tail but was not explained.	2003–2006	Copper Mines of Tasmania	CSAMT survey	A moderate anomaly was recorded in the area of the Copper estates prospect.
Period	Company	Exploration Activities	Outcomes / Notes																											
1957-1961	Lyell E.Z	Turam E.M and IP surveys over the Great Lyell area and then follow-up drilling.	Targets were tested by five drill-holes (GL1-5) in 1961 with best assay in hole GL2 returned 1.5m @ 0.8% Cu.																											
1967–1970	Picklands Mather, Placer Exploration Ltd & Mount Lyell Mining and Railway (MLMR)	Picklands completed stream sediment sampling, soil sampling, EM, IP, ground magnetics regional exploration in the Roaring Meg area and Placer did an S.P survey at Gormanston. MLMR did follow-up drilling at Gormanston.	Picklands drilled 8 diamond holes (only 5 reached the target depth :RM201-205). Best reported intersection was 1.5m @ 0.49% Cu, 9 g/t Ag in RM201. Placer received several small chargeable anomalies. Two diamond drill holes were completed by MLMR in 1968, no results reported.																											
1970–1980	Mount Lyell Mining and Railway	Geological mapping, I.P, ground magnetics and drilling.	69 anomalies were identified and several extensive I.P. zones were delineated. A ten hole diamond drilling program was recommended but was not completed.																											
1980–1990	Goldfields Exploration	Geological mapping and trench sampling in the adits and then drilling.	Little Owen adits returned a significant gold zone 16m wide with the best trench sample returning 5.7m @ 6.2 g/t Au. Two diamond holes were drilled (LO1 and LO2) to test beneath the mineralised trench sampling and intersected 14m @ 0.13g/t Au in LO1 and 21m @ 0.3 g/t Au in LO2.																											
1994–1998	Copper Mines of Tasmania (CMT)	Costeaning at Cemetery Creek. CSAMT line over the Chamouni Zinc prospect. Both prospects had follow-up drilling.	Costean returned 10m @ 1% Zn. Followed up with two RC drill holes with best intersection of 12m @ 2.4% Zn. CSAMT anomaly was tested by an RC drill hole with a Diamond tail but was not explained.																											
2003–2006	Copper Mines of Tasmania	CSAMT survey	A moderate anomaly was recorded in the area of the Copper estates prospect.																											

Section 2: Reporting of Results					
Criteria	JORC Code explanation	Commentary			
		2006–2009	Copper Strike	Drilling (Gorm1 and LOS1)	No significant mineralisation recorded.
		2010–2018	Corona Minerals	Airborne TEM and aeromagnetic survey, geochemical sampling, mapping 15 aircore reverse circulation holes and 7 vertical PQ3 and HQ3 diamond holes in the Chamonix Prospect.	Best intersection of 12m @ 5.3% Zn, 0.9% Pb and 15.4g/t Ag from 16m. Mineralisation identified as pyrite-sphalerite-galena-tetrahedrite hosted in silicified and sericitised carbonaceous shale.
Geology	Deposit type, geological setting and style of mineralisation.	The regional geology consists of Cambrian volcano sedimentary rocks of the Mount Read Volcanics which are locally intensely hydrothermally altered and mineralised. Known mineralisation is dominantly synergised to epigenetic disseminated chalcopyrite and bornite with varying amounts of pyrite and localised high-grade vein mineralisation. Copper grades typically average 1.0 to 1.5% copper, with significant gold and silver mineralisation. Zinc, lead and silver and surficial secondary copper mineralisation is also present within the Mt Read Volcanics. The mineralised mine sequence is overlain by Palaeozoic sedimentary sequences and locally cut by Tertiary intrusives. Cenozoic glaciation has modified the topography and resulted in local glacial sediment cover. Mineralisation is typically hosted by schistose felsic to intermediate volcanics of the Central Volcanic Complex (CVC) of the 250 km long, middle to late Cambrian Mt Read Volcanic Arc. To the south-east of the Henty Fault this complex is composed of rhyolitic to dacitic acid lavas and pyroclastics with some andesites and minor shale. The CVC rocks consist of metamorphic assemblages of quartz, sericite, chlorites and sulphides (lower greenschist facies).			
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	No drilling results have been included in this ASX Release.			
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	No analytical results have been included in this ASX Release.			

Section 2: Reporting of Results		
Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	There are no analytical results to report in this release.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Appropriate maps are included in the announcement.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All EM anomalies that have been identified in the Comstock valley target area have been represented as drill targets in Figure 1.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	EM survey has been detailed above with no other substantive exploration data included in this announcement.
Further work	- The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Further work programs at Linda will include, but not be limited to: - Additional ground based geophysical surveys, including electromagnetic (DHEM, MLEM), IP, CSAMT, Gravity, and magnetics. - Surface geochemical sampling including rock chips, soil and ionic leach soil and stream sediment sampling (in areas of cover). - RC and DD drill testing of high priority coincident geophysical and geochemical anomalies.