

4 March 2026

Significant High-Grade Intercepts Further Strengthens Kokoseb's Underground Growth Potential

Wia Gold Limited (ASX: WIA) (**Wia** or the **Company**) reports additional significant assay results from 13,166 meters of recent drilling at its 2.93Moz **Kokoseb Gold Project** in Namibia. Results from eighteen (18) diamond drill holes (**DD**) targeting mineralised depth extensions beyond the current open-pit Mineral Resource Estimate (**MRE**) further confirm the continuity, scale and robustness of high-grade plunging shoots, while ten (10) Reverse Circulation (**RC**) holes have successfully advanced infill drilling within the open pit area.

Assay results from the 28 drill holes include:

- **Southern Zone high-grade plunging shoot extended to at least 400m below the Scoping Study pit shell, significantly enhancing underground development potential:**
 - 10.8m @ 5.16 g/t Au from 537.6m, inc. 4.6m @ 11.24 g/t Au in KDD134
 - 6.3m @ 5.41 g/t Au from 550.9m, inc. 3.0m @ 10.09 g/t Au in KDD134
 - 22.6m @ 2.13 g/t Au from 424.4m, inc. 5.0m @ 7.02 g/t Au in KDD125
 - 4m @ 19.41 g/t Au from 367m in KRC577
- **New high-grade targets identified beneath the Central Zone pit shell, reinforcing underground growth potential:**
 - 20.7m @ 5.77 g/t Au from 578.8m, inc. 11.0m @ 9.94 g/t Au in KDD129
 - 8.8m @ 2.60 g/t Au from 668.0m, inc. 3.0m @ 4.92 g/t Au in KDD120
 - 16.0m @ 7.55 g/t Au from 708.0m in KDD114
 - 7.0m @ 5.77 g/t Au from 743.0m in KDD114
- **Strong continuity confirmed in Central Zone high-grade plunging shoots, which remains open at depth:**
 - 5.6m @ 36.54 g/t Au from 370.0m in KDD123
 - 18.0m @ 2.80 g/t Au from 358.0m, inc. 3.1m @ 11.09 g/t Au in KDD116

Six diamond drill rigs are currently advancing the definition of high-grade zones to underpin future underground resource potential, while a dedicated RC rig is carrying out shallow infill drilling to enhance and expand the open-pit resource base.

Commenting on the results, Wia Managing Director and CEO, Henk Diederichs, said:

"These drilling results continue to confirm the continuity and scale of the high-grade gold system at depth, further enhancing the prospectivity of an underground mining operation beyond the open pit shell. In the Southern Zone, mineralisation has now been extended by at least 400 metres below the Scoping Study pit shell, with the discovery of new high-grade targets beneath the Central Zone. Both zones remain open at depth. With six diamond rigs and one RC rig currently operating, we are accelerating underground resource definition and expansion whilst also de-risking the open pit ahead of completing our Definitive Feasibility Study in H2 2026."

Southern Zone high-grade plunging shoot extended 400m below pit shell

Recent drilling further demonstrates the scale, continuity and underground potential of the high-grade plunging shoot at the Southern Zone, extending to at least 400m below the base of the Scoping Study pit shell.

The Southern Zone plunging shoot displays a consistent and well-defined geometry, with an approximate width of 150m and a moderate plunge of approximately 55° to the south. Mineralisation is steeply dipping (>80°) and characterised by strong internal grade continuity, including coherent high-grade domains.

This geometry, combined with the grade tenor and continuity at depth, reinforces the Southern Zone as a compelling underground development target.

The shoot remains completely open down-plunge. Latest diamond drill hole **KDD134** has confirmed mineralisation continuity to 400m below the Scoping Study pit shell, significantly extending the known depth of the high-grade system (Figure 1 below).

Key intercepts include:

25.0m @ 1.58 g/t Au from 407m, inc. 2.3m @ 3.65 g/t Au and 2.0m @ 3.58 g/t Au in KDD121

22.6m @ 2.13 g/t Au from 424.4m, inc. 5.0m @ 7.02 g/t Au in KDD125

10.8m @ 5.16 g/t Au from 537.6m, inc. 4.6m @ 11.24 g/t Au in KDD134

6.3m @ 5.41 g/t Au from 550.9m, inc. 3.0m @ 10.09 g/t Au in KDD134

34m @ 1.43 g/t Au from 316m, inc. 5.0m @ 4.31 g/t Au in KRC577

4m @ 19.41 g/t Au from 367m in KRC577

13m @ 1.56 g/t Au from 381m, inc. 2.0m @ 3.84 g/t Au in KRC578

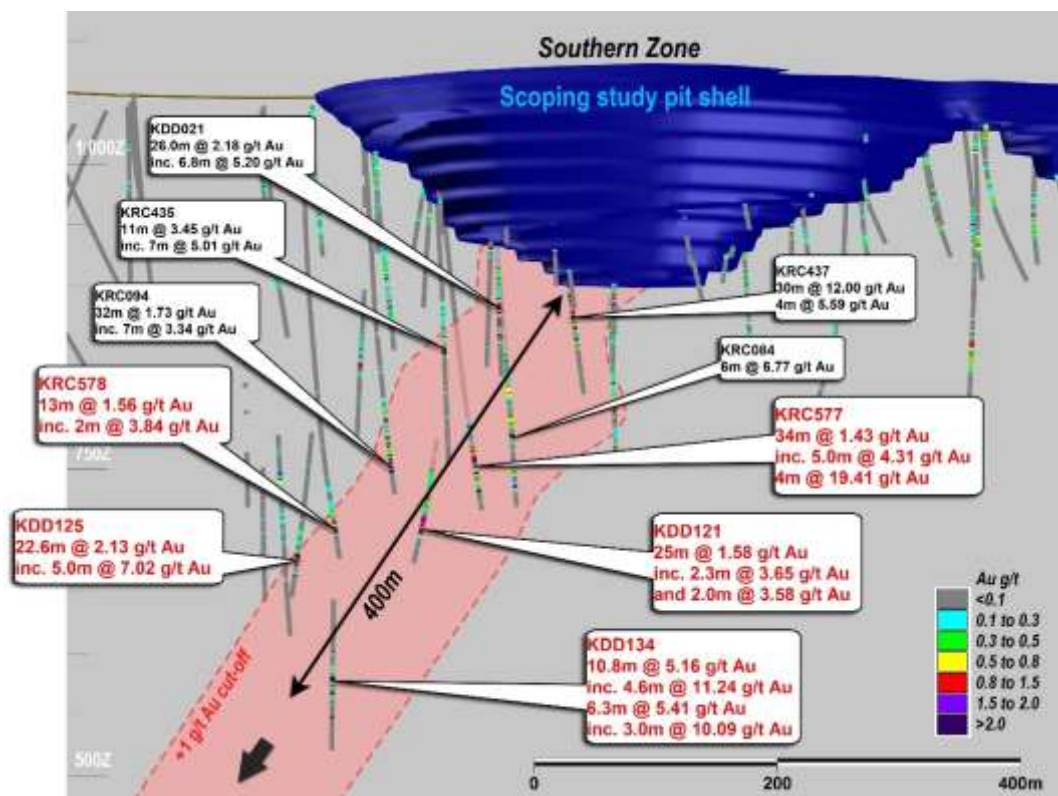


Figure 1 – Long section view at the Southern Zone plunging shoot. Location of high-grade intercepts reported in this announcement¹ (intercepts in black previously reported)²

¹ Intercept calculated using 0.5 g/t cut-off grade and 2m maximum consecutive internal low grade.

² Refer to ASX announcements dated 15 May 2023, 29 May 2023, 12 March 2024 and 3 July 2025.

New high-grade targets identified beneath the Central Zone pit shell, reinforcing underground growth potential

Drilling beneath the Scoping Study pit shell at Central Zone has identified new high-grade target zones at depth, reinforcing the potential for future underground development (Figure 2).

Diamond drill hole **KDD129** intersected a substantial high-grade zone down plunge of previously reported strong intercepts in KDD055 (26.0 @ 7.90 g/t Au)³ and KDD109 (23.7 @ 6.59 g/t Au)⁴:

20.7m @ 5.77 g/t Au from 578.8m, inc. 11.0m @ 9.94 g/t Au in KDD129

These results define a coherent mineralised trend over approximately 350m of strike, confirming the continuity of high-grade gold mineralisation at depth and outlining a compelling new underground target zone.

Drilling beneath the Central high-grade shoot has delivered further encouraging results. Diamond drill holes **KDD114** and **KDD120**, together with earlier hole KDD106 (11.0 @ 4.46 g/t Au)⁴ indicate the discovery of an additional high-grade zone below the Central high-grade shoot.

Key intercepts include:

16.0m @ 7.55 g/t Au from 708m in KDD114

7.0m @ 5.77 g/t Au from 743m in KDD114

8.8m @ 2.60 g/t Au from 668.0m, inc. 3.0m @ 4.92 g/t Au in KDD120

The newly identified high-grade target zones remain open and will be prioritised in upcoming drilling campaigns.

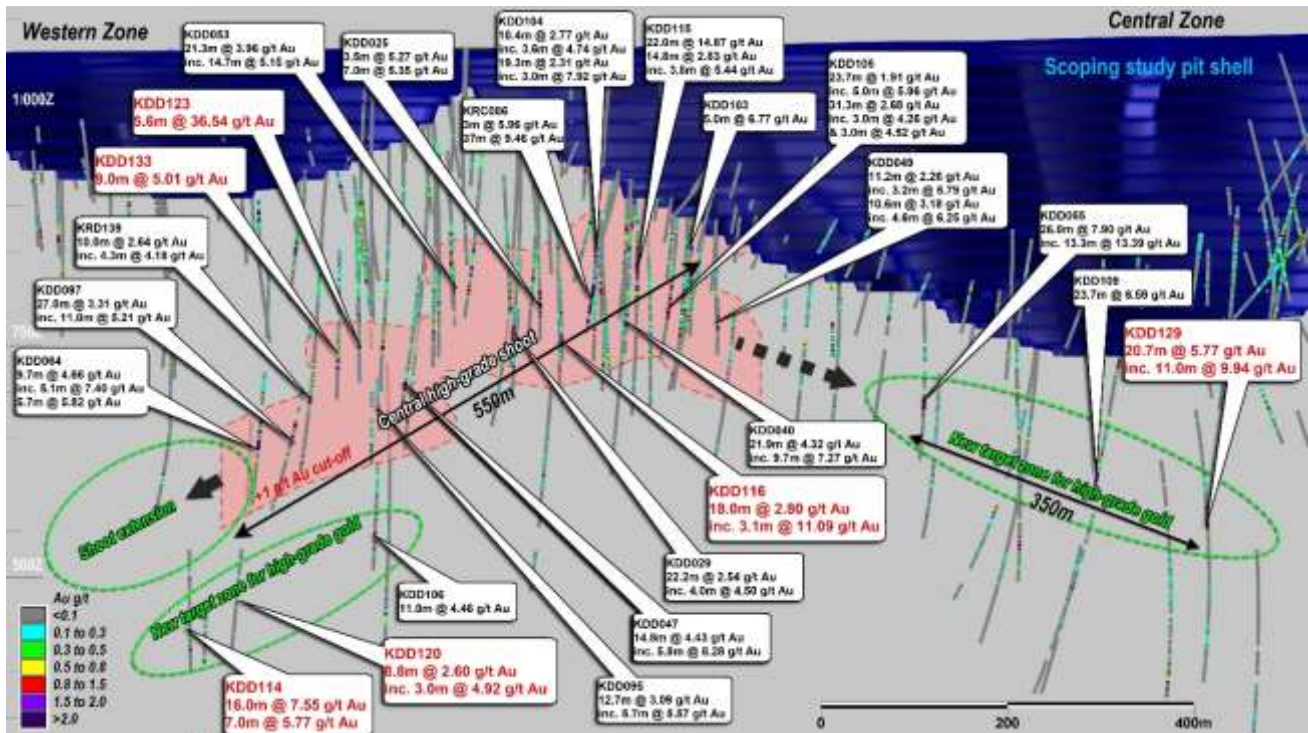


Figure 2 – Long section view showing the Central high-grade shoot and the new deep target zones beneath the scoping study pit, under the Western and Central Zones of Kokoseb. Location of high-grade intercepts reported in this announcement⁵ (intercepts in black previously reported)⁶

³ Refer to ASX announcement dated 12 June 2025.

⁴ Refer to ASX announcement dated 8 December 2025.

⁵ Intercept calculated using 0.5 g/t cut-off grade and 2m maximum consecutive internal low grade.

⁶ Refer to ASX announcements dated 29 May 2023, 5 February 2024, 20 May 2024, 13 January 2025, 27 February 2025, 15 April 2025, 3 July 2025 and 8 December 2025.

Central Zone high-grade shoot continues to show strong continuity

Infill drilling at the Central Zone high-grade shoot continues to deliver highly consistent results, further validating the geological continuity of high-grade gold mineralisation and strengthening the case for a future underground Mineral Resource.

The Central Zone high-grade shoot is currently defined over approximately 550m of strike, plunging beneath the base of the Scoping Study pit shell (Figure 2). The system remains open down-plunge and locally along portions of its lateral margins, indicating clear potential for further expansion.

Ongoing drill testing of plunge and strike extensions will remain a key priority over the coming months.

Recent significant intercepts include:

18.0m @ 2.80 g/t Au from 358m, inc. 3.1m at 11.09 g/t Au in KDD116

5.6m @ 36.54 g/t Au from 370.0m in KDD123 (Figure 3)

9.0m @ 5.01 g/t Au from 407m in KDD133



Figure 3 – Native gold cluster at 374.6m depth in KDD123

RC Infill Drilling

Shallow RC infill drilling in the Gap and Central Zones (Figure 4) confirm near-surface grade continuity and highlights opportunities for incremental resource expansion.

Significant intercepts include the following:

3m @ 10.86 g/t Au from 177m in KRC568

7m @ 1.04 g/t Au from 230m in KRC568

12m @ 1.35 g/t Au from 240m in KRC568

26m @ 1.21 g/t Au from 102.0m in KRC571

12m @ 1.76 g/t Au from 105m in KRC572

4m @ 4.02 g/t Au from 144m in KRC572

15m @ 1.20 g/t Au from 177.0m in KRC573

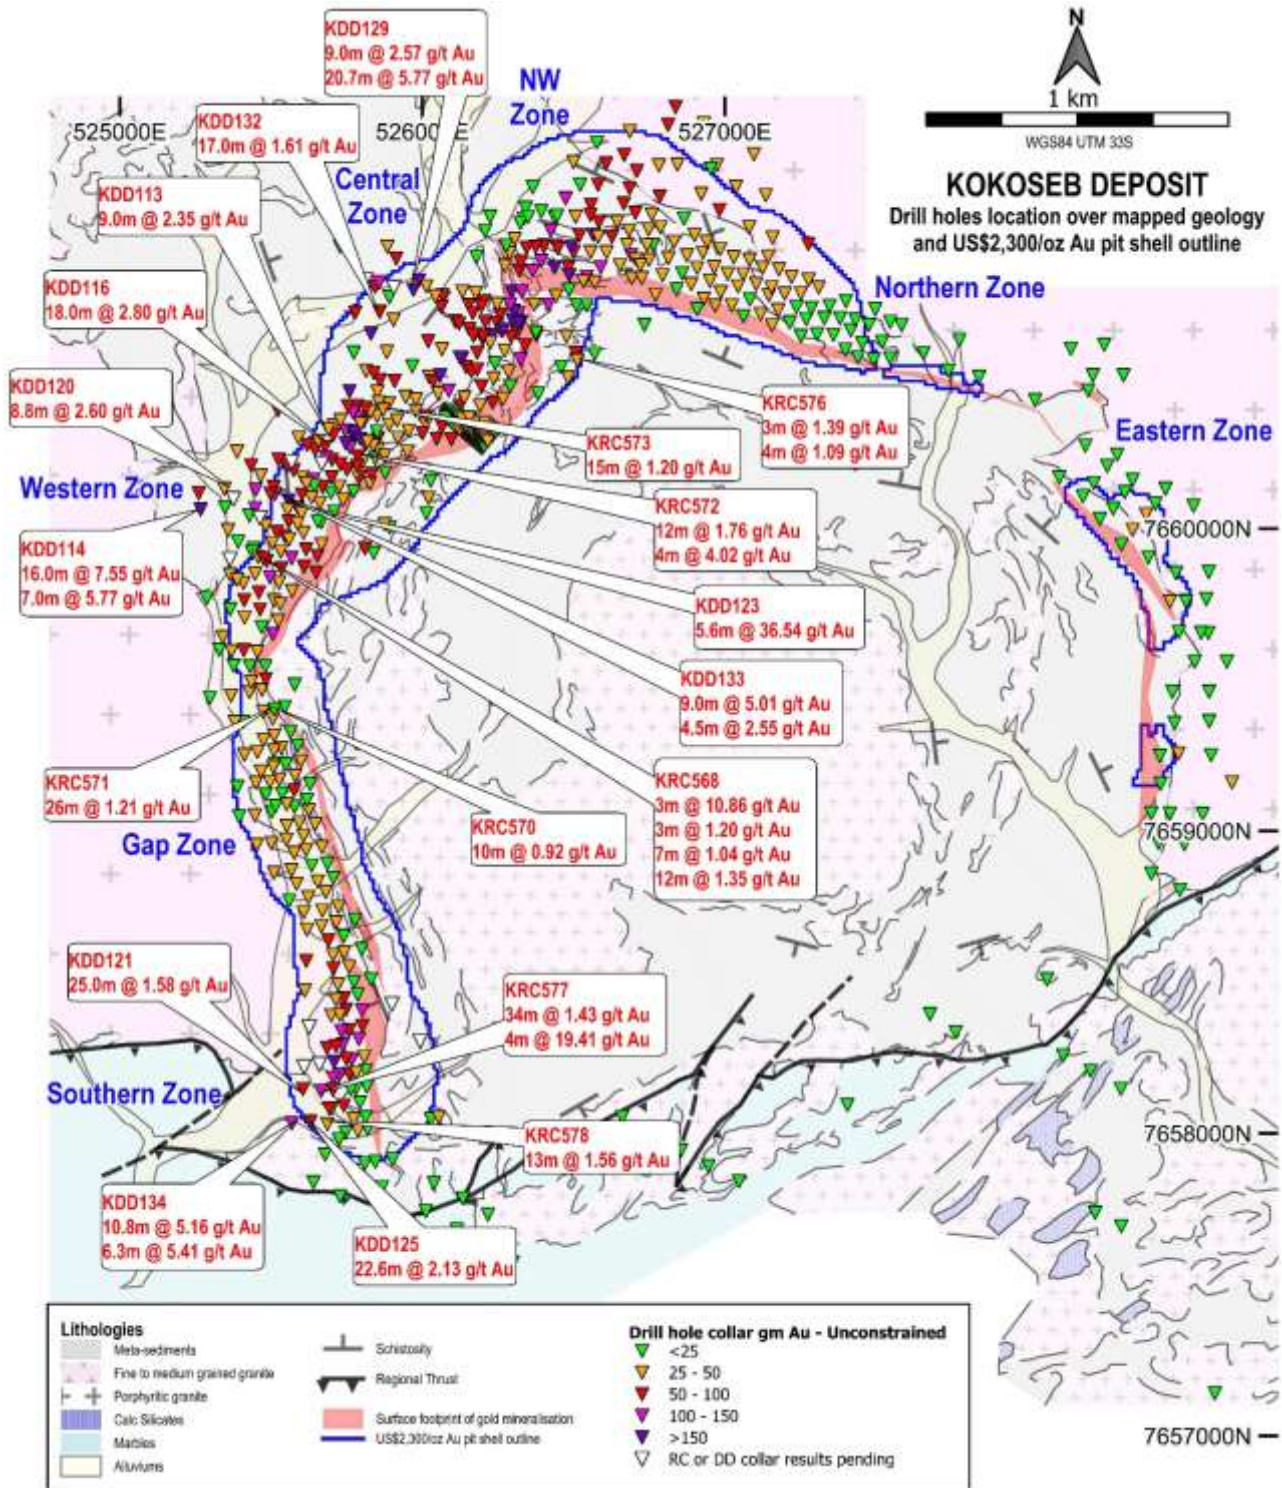


Figure 4 – Drill hole locations over the Kokoseb geology and interpreted mineralisation footprint, location of significant intercepts reported in this announcement⁷

This announcement has been authorised for release by the board of directors of Wia Gold Limited.

⁷ Intercept calculated using 0.5 g/t cut-off grade and 2m maximum consecutive internal low grade.

Contact details

Henk Diederichs
Managing Director and CEO
+61 8 6288 4252

Bobby Morse/Louise Mason-Rutherford/George
Pope
Burson Buchanan
+44 (0)7802 875227
wia@bursonbuchanan.com

Competent Person's Statement

The information in this announcement that relates to exploration results at the Kokoseb Gold Project is based on information compiled by Company geologists and reviewed by Mr Pierrick Couderc, in his capacity as Exploration Manager of Wia Gold Limited. Mr. Couderc is a member of both the Australian Institute of Mining and Metallurgy and the Australian Institute of Geoscientists and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Couderc consents to the inclusion in the report of the matters based upon the information in the form and context in which it appears.

Reference to previous ASX Announcements

In relation to previously reported exploration results included in this announcement, the dates of which are referenced, the Company confirms that it is not aware of any new information or data that materially affects the information included in those announcements.

In relation to the information in this announcement that relates to the Mineral Resource Estimate for the Kokoseb Gold Project that was reported on 16 July 2025, other than subsequently released drilling results, Wia confirms that it is not aware of any new information or data that materially affects the information included in that release. All material assumptions and technical parameters underpinning the estimates in that ASX release continue to apply and have not materially changed.

About The Kokoseb Gold Deposit

The Kokoseb Gold Deposit is located in the north-west of Namibia, a country that is a well-recognised mining jurisdiction, with an established history as a significant producer of uranium, diamonds, gold and base metals. The Kokoseb gold deposit is situated 320km by road from the capital Windhoek.

Kokoseb lies in the Okombahe exploration licence, which is held under joint venture (Wia 80%) with the state-owned mining company Epangelo. The Okombahe licence is part of Wia's larger Damaran Project, which consist of 12 tenements with a total area of over 2,700km².

An updated Inferred and Indicated Mineral Resource Estimate of 2.93Moz @ 1.0 g/t Au, at a cut-off grade of 0.5 g/t Au, including a higher-grade gold portion of 2.07Moz @ 1.4 g/t Au using a cut-off grade of 0.8 g/t Au, was announced on 16 July 2025.

The location of Kokoseb and the Company's Namibian Projects is shown in Figure 5 below.

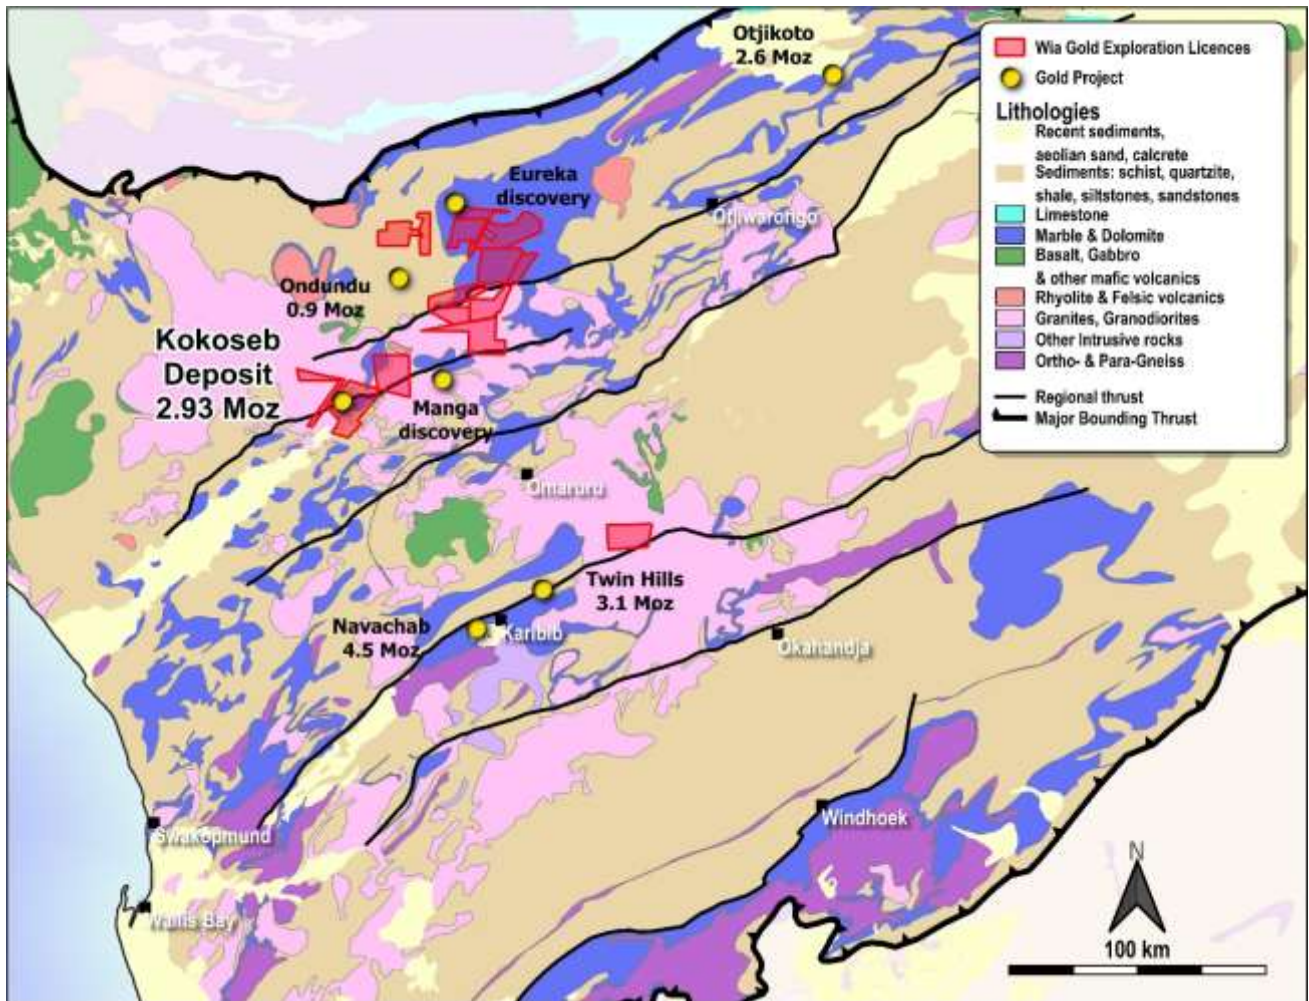


Figure 5 – Location of Wia’s Namibia Projects

Cut-off Au g/t	Indicated			Inferred			TOTAL		
	Tonnes (Mt)	Au g/t	Au Moz	Tonnes (Mt)	Au g/t	Au Moz	Tonnes (Mt)	Au g/t	Au Moz
0.18	110	0.67	2.37	78	0.62	1.6	188	0.65	3.92
0.30	82.6	0.82	2.18	58	0.75	1.4	141	0.79	3.58
0.50	54.2	1.04	1.81	35	0.99	1.1	89	1.0	2.93
0.80	29.1	1.39	1.30	17	1.4	0.77	46	1.4	2.07

Table 1 – Kokoseb Inferred and Indicated Mineral Resource estimates for selected cut-off grades. The estimates in this table are rounded to reflect their precision; rounding errors are apparent. They are based on drilling data available at 30th June 2025. The Competent Person responsible for the data informing the estimates is Pierrick Couderc, Wia Group Exploration Manager. The Competent Person responsible for resource modelling is Jonathon Abbott MAIG, Director of Matrix Resource Consultants Pty Ltd. The Resources are constrained by an optimised pit shell using a metal price of US\$2,300/oz Au and process recovery of 92%.

Appendix 1. Kokoseb – Location of diamond and RC drillholes

Hole ID	Easting	Northing	RL	Length (m)	Dip (°)	Azi (°)
KDD112	525388	7660254	1065	750	-60	120
KDD113	525689	7660328	1069	438	-60	120
KDD114	525267	7660063	1066	777	-60	120
KDD116	525679	7660270	1068	396	-60	120
KDD117	525729	7660358	1069	444	-60	120
KDD118	525657	7660290	1068	441	-60	120
KDD119	525891	7660765	1071	756	-60	120
KDD120	525345	7660131	1065	753	-60	120
KDD121	525605	7658146	1052	462	-60	80
KDD123	525558	7660093	1064	420	-60	120
KDD125	525630	7658038	1052	482	-60	80
KDD126	525442	7659934	1063	480	-60	120
KDD128	526054	7658053	1056	522	-60	260
KDD129	525970	7660789	1071	801	-60	90
KDD131	525358	7659994	1064	606	-60	120
KDD132	525859	7660716	1071	672	-60	110
KDD133	525513	7660114	1066	471	-60	120
KDD134	525569	7658033	1051	615	-60	80
KRC568	525475	7659901	1063	430	-61	120
KRC570	525511	7659402	1060	110	-56	84
KRC571	525474	7659394	1059	155	-60	80
KRC572	525785	7660206	1068	170	-60	120
KRC573	525871	7660392	1071	290	-60	120
KRC574	526507	7660581	1078	270	-60	340
KRC575	526569	7660577	1079	335	-60	340
KRC576	526512	7660555	1077	310	-60	340
KRC577	525665	7658139	1052	390	-60	80
KRC578	525686	7658030	1052	420	-60	80

Appendix 2. Diamond and RC drill holes gold assays, using a cut-off grade of 0.2 g/t gold and max 2m consecutive internal waste material

Hole ID	From (m)	To (m)	Gold g/t
KDD112	593.0	594.0	0.33
KDD112	594.0	595.0	0.04
KDD112	595.0	596.0	0.07
KDD112	596.0	597.0	0.25
KDD112	597.0	598.0	0.14
KDD112	598.0	599.0	0.13
KDD112	599.0	600.0	1.36
KDD112	660.7	661.4	0.31
KDD112	661.4	662.1	0.04
KDD112	662.1	663.1	0.25
KDD112	663.1	664.0	0.01
KDD112	664.0	665.0	0.01
KDD112	665.0	666.0	1.28
KDD112	695.0	696.0	0.44
KDD112	696.0	697.0	5.87
KDD112	697.0	698.0	2.20
KDD112	698.0	699.0	0.90
KDD112	699.0	700.0	0.27
KDD112	700.0	701.0	0.08
KDD112	701.0	702.0	0.14
KDD112	702.0	703.0	0.61
KDD112	703.0	704.0	0.74

Hole ID	From (m)	To (m)	Gold g/t
KDD112	704.0	705.0	0.53
KDD112	705.0	706.0	0.36
KDD112	706.0	707.0	0.27
KDD112	707.0	708.0	0.47
KDD112	708.0	709.0	0.66
KDD112	709.0	710.1	0.11
KDD112	710.1	711.0	0.22
KDD112	711.0	711.8	0.18
KDD112	711.8	712.5	0.37
KDD113	329.0	330.0	0.84
KDD113	330.0	331.0	0.34
KDD113	331.0	332.0	0.51
KDD113	337.0	338.0	0.54
KDD113	338.0	339.0	0.19
KDD113	339.0	339.8	0.32
KDD113	339.8	340.8	0.11
KDD113	340.8	341.4	0.06
KDD113	341.4	342.0	0.32
KDD113	386.0	387.0	1.89
KDD113	387.0	388.0	0.63
KDD113	388.0	389.0	2.75
KDD113	389.0	390.0	0.53

Hole ID	From (m)	To (m)	Gold g/t
KDD113	390.0	391.0	2.75
KDD113	391.0	392.0	0.22
KDD113	392.0	393.0	0.40
KDD113	393.0	393.8	0.43
KDD113	393.8	394.8	0.16
KDD113	394.8	395.4	0.42
KDD113	395.4	396.0	0.41
KDD113	396.0	397.0	0.62
KDD113	397.0	398.0	0.31
KDD113	398.0	399.0	1.72
KDD113	399.0	400.0	0.08
KDD113	400.0	401.0	0.20
KDD113	401.0	402.0	1.35
KDD113	402.0	403.0	13.40
KDD113	403.0	404.0	1.83
KDD113	404.0	405.0	1.62
KDD113	405.0	406.0	0.44
KDD113	406.0	406.8	0.33
KDD114	652.0	653.0	0.96
KDD114	653.0	654.0	0.86
KDD114	654.0	655.0	4.68
KDD114	671.0	672.0	0.56
KDD114	672.0	673.0	0.31
KDD114	673.0	674.0	0.03
KDD114	674.0	675.0	0.28
KDD114	675.0	676.0	0.23
KDD114	676.0	677.0	0.06
KDD114	677.0	678.0	0.61
KDD114	678.0	679.0	0.12
KDD114	679.0	680.0	0.98
KDD114	680.0	681.0	0.30
KDD114	681.0	682.0	0.44
KDD114	689.0	690.0	0.64
KDD114	690.0	691.0	0.86
KDD114	691.0	692.0	0.28
KDD114	706.0	707.0	0.28
KDD114	707.0	708.0	0.17
KDD114	708.0	709.0	0.69
KDD114	709.0	709.5	1.13
KDD114	709.5	711.0	0.03
KDD114	711.0	712.0	1.69
KDD114	712.0	713.0	0.19
KDD114	713.0	714.0	0.69
KDD114	714.0	715.0	2.00
KDD114	715.0	716.0	1.27
KDD114	716.0	717.0	0.27
KDD114	717.0	718.0	0.33
KDD114	718.0	719.0	1.38
KDD114	719.0	720.0	0.31
KDD114	720.0	721.0	0.22
KDD114	721.0	722.0	110.00
KDD114	722.0	723.0	0.32
KDD114	723.0	724.0	0.82
KDD114	724.0	725.0	0.26
KDD114	740.0	741.0	0.21
KDD114	741.0	742.0	0.08
KDD114	742.0	743.0	0.48
KDD114	743.0	744.0	1.28
KDD114	744.0	745.0	0.16
KDD114	745.0	746.0	23.90

Hole ID	From (m)	To (m)	Gold g/t
KDD114	746.0	747.0	0.22
KDD114	747.0	748.0	1.14
KDD114	748.0	749.0	5.88
KDD114	749.0	750.0	7.81
KDD114	750.0	752.0	0.01
KDD114	752.0	753.0	0.31
KDD116	246.0	247.0	0.92
KDD116	247.0	248.0	3.04
KDD116	248.0	249.0	0.09
KDD116	249.0	250.0	0.35
KDD116	253.0	254.0	0.26
KDD116	254.0	255.0	0.34
KDD116	255.0	255.8	0.97
KDD116	331.0	332.0	6.28
KDD116	332.0	332.8	7.47
KDD116	332.8	333.3	0.04
KDD116	333.3	334.3	0.39
KDD116	340.0	341.0	0.24
KDD116	341.0	342.0	0.15
KDD116	342.0	343.0	3.79
KDD116	347.0	347.5	1.21
KDD116	347.5	348.5	0.91
KDD116	348.5	349.2	0.01
KDD116	349.2	350.0	0.48
KDD116	350.0	351.0	0.14
KDD116	351.0	352.0	0.12
KDD116	352.0	353.0	0.24
KDD116	353.0	354.0	0.08
KDD116	354.0	355.0	0.21
KDD116	360.5	361.5	1.28
KDD116	361.5	362.9	0.07
KDD116	362.9	363.5	2.05
KDD116	363.5	364.0	3.37
KDD116	364.0	365.0	13.50
KDD116	365.0	366.0	17.95
KDD116	366.0	367.0	0.23
KDD116	367.0	368.0	1.06
KDD116	368.0	369.0	0.85
KDD116	369.0	370.0	1.73
KDD116	370.0	371.0	1.39
KDD116	371.0	372.0	1.51
KDD116	372.0	373.0	1.18
KDD116	373.0	374.0	2.50
KDD116	374.0	375.0	0.81
KDD116	375.0	376.0	1.68
KDD116	376.0	377.0	0.47
KDD117	223.0	223.7	0.23
KDD117	223.7	224.4	0.06
KDD117	224.4	226.3	0.09
KDD117	226.3	227.0	0.33
KDD117	227.0	228.0	0.32
KDD117	239.6	240.3	0.24
KDD117	240.3	241.4	0.23
KDD117	241.4	242.4	2.70
KDD117	242.4	243.4	0.09
KDD117	243.4	244.4	0.40
KDD117	244.4	245.4	0.33
KDD117	245.4	246.4	0.26
KDD117	246.4	247.2	0.02
KDD117	247.2	248.3	0.13

Hole ID	From (m)	To (m)	Gold g/t
KDD117	248.3	249.0	0.24
KDD117	275.0	276.0	0.23
KDD117	276.0	277.0	0.04
KDD117	277.0	278.0	0.05
KDD117	278.0	279.0	0.33
KDD117	279.0	280.0	0.06
KDD117	280.0	281.0	0.08
KDD117	281.0	282.0	0.52
KDD117	282.0	283.0	0.08
KDD117	283.0	284.0	0.27
KDD117	284.0	285.0	0.31
KDD117	285.0	286.0	0.08
KDD117	286.0	287.0	0.14
KDD117	287.0	287.9	0.31
KDD117	287.9	289.9	0.28
KDD117	289.9	292.1	0.25
KDD117	292.1	293.0	0.41
KDD117	296.5	297.5	0.72
KDD117	297.5	298.5	0.28
KDD117	298.5	299.5	0.08
KDD117	299.5	300.0	0.31
KDD117	300.0	302.0	1.84
KDD117	312.0	313.0	0.30
KDD117	313.0	314.0	0.73
KDD117	314.0	314.9	0.59
KDD117	325.4	326.2	0.42
KDD117	326.2	326.8	0.36
KDD117	326.8	327.4	0.13
KDD117	327.4	328.4	0.21
KDD117	328.4	329.4	1.05
KDD117	329.4	330.3	0.09
KDD117	330.3	330.8	1.07
KDD117	374.0	375.0	0.42
KDD117	375.0	376.0	0.88
KDD117	376.0	377.0	2.74
KDD117	377.0	378.0	0.62
KDD117	378.0	379.0	0.04
KDD117	379.0	380.0	0.19
KDD117	380.0	381.0	0.46
KDD117	381.0	382.0	0.43
KDD117	382.0	382.7	0.47
KDD117	382.7	383.4	1.08
KDD117	394.1	395.0	0.40
KDD117	395.0	396.0	1.23
KDD117	396.0	396.5	0.59
KDD117	396.5	398.5	0.02
KDD117	398.5	400.6	0.05
KDD117	400.6	401.6	0.21
KDD117	401.6	402.4	0.15
KDD117	402.4	403.4	1.05
KDD117	403.4	404.0	0.63
KDD118	293.0	294.0	0.59
KDD118	294.0	294.9	0.28
KDD118	294.9	295.5	0.01
KDD118	295.5	296.0	0.57
KDD118	331.0	332.0	0.21
KDD118	332.0	333.0	0.27
KDD118	333.0	334.0	0.73
KDD118	334.0	335.0	0.60
KDD118	335.0	336.0	0.02

Hole ID	From (m)	To (m)	Gold g/t
KDD118	336.0	337.0	0.21
KDD118	337.0	338.0	0.12
KDD118	338.0	339.0	0.52
KDD118	339.0	340.0	0.05
KDD118	340.0	341.0	0.47
KDD118	341.0	342.0	0.30
KDD118	342.0	343.0	0.03
KDD118	343.0	344.0	3.57
KDD118	344.0	345.0	0.23
KDD118	377.1	377.9	0.26
KDD118	377.9	378.4	0.23
KDD118	378.4	379.4	0.08
KDD118	379.4	380.4	0.06
KDD118	380.4	381.4	0.23
KDD118	384.4	385.4	0.28
KDD118	385.4	386.4	0.27
KDD118	386.4	387.4	0.62
KDD118	387.4	388.4	0.31
KDD118	388.4	389.4	0.13
KDD118	389.4	390.4	0.37
KDD118	390.4	391.4	0.59
KDD118	391.4	392.4	0.43
KDD118	398.4	399.4	1.03
KDD118	399.4	400.4	0.54
KDD118	400.4	401.4	1.03
KDD118	401.4	402.4	0.18
KDD118	402.4	403.4	3.54
KDD118	403.4	404.4	0.80
KDD118	404.4	405.4	6.55
KDD118	405.4	406.4	0.41
KDD118	406.4	407.4	1.68
KDD118	407.4	408.4	0.92
KDD118	408.4	409.4	1.07
KDD118	409.4	410.4	1.19
KDD118	410.4	411.4	0.68
KDD119	494.9	495.9	0.43
KDD119	495.9	496.9	0.68
KDD119	496.9	497.7	0.48
KDD119	635.5	636.5	0.29
KDD119	636.5	637.5	0.06
KDD119	637.5	638.5	0.25
KDD119	638.5	639.5	0.07
KDD119	639.5	640.5	0.32
KDD119	640.5	641.5	0.39
KDD120	626.0	627.0	0.21
KDD120	627.0	628.0	0.04
KDD120	628.0	629.0	5.06
KDD120	629.0	630.0	0.12
KDD120	630.0	631.0	0.02
KDD120	631.0	632.0	0.64
KDD120	662.9	664.0	0.20
KDD120	664.0	665.0	0.65
KDD120	665.0	666.0	0.08
KDD120	666.0	667.0	0.31
KDD120	667.0	668.0	0.10
KDD120	668.0	669.0	1.62
KDD120	669.0	670.0	5.03
KDD120	670.0	671.0	4.98
KDD120	671.0	672.0	4.76
KDD120	672.0	673.0	0.72

Hole ID	From (m)	To (m)	Gold g/t
KDD120	673.0	674.0	2.88
KDD120	674.0	675.0	0.81
KDD120	675.0	676.0	0.84
KDD120	676.0	676.8	1.51
KDD120	681.8	682.8	0.22
KDD120	682.8	683.8	0.54
KDD120	683.8	684.8	0.25
KDD121	358.0	359.0	0.46
KDD121	359.0	360.0	0.38
KDD121	360.0	361.0	0.39
KDD121	361.0	362.0	0.32
KDD121	362.0	363.0	0.20
KDD121	363.0	364.0	0.35
KDD121	364.0	365.0	0.39
KDD121	365.0	366.0	0.63
KDD121	366.0	367.0	0.40
KDD121	367.0	368.0	0.47
KDD121	368.0	369.0	0.21
KDD121	369.0	370.0	0.32
KDD121	370.0	371.0	0.25
KDD121	377.0	378.0	0.48
KDD121	378.0	379.0	0.74
KDD121	379.0	380.0	0.56
KDD121	380.0	381.0	0.75
KDD121	381.0	382.0	0.43
KDD121	382.0	383.0	1.28
KDD121	383.0	384.0	0.40
KDD121	384.0	385.0	0.42
KDD121	385.0	386.0	1.11
KDD121	386.0	387.0	0.83
KDD121	387.0	388.0	0.96
KDD121	388.0	389.0	0.42
KDD121	389.0	390.0	0.33
KDD121	390.0	391.0	0.64
KDD121	391.0	392.0	0.47
KDD121	392.0	393.0	0.48
KDD121	393.0	394.0	0.03
KDD121	394.0	395.0	0.13
KDD121	395.0	396.0	0.89
KDD121	396.0	397.0	0.34
KDD121	397.0	398.0	0.41
KDD121	398.0	399.0	0.38
KDD121	399.0	400.0	0.26
KDD121	407.0	408.0	1.64
KDD121	408.0	409.0	1.19
KDD121	409.0	410.0	5.14
KDD121	410.0	410.7	2.86
KDD121	410.7	411.3	2.00
KDD121	411.3	412.4	0.92
KDD121	412.4	413.0	1.98
KDD121	413.0	414.0	1.83
KDD121	414.0	415.0	1.05
KDD121	415.0	416.0	0.34
KDD121	416.0	417.0	0.96
KDD121	417.0	418.0	1.28
KDD121	418.0	419.0	1.38
KDD121	419.0	420.0	0.42
KDD121	420.0	421.0	2.00
KDD121	421.0	422.0	0.35
KDD121	422.0	422.8	1.49

Hole ID	From (m)	To (m)	Gold g/t
KDD121	422.8	423.4	4.99
KDD121	423.4	424.0	5.07
KDD121	424.0	425.0	0.85
KDD121	425.0	426.6	1.75
KDD121	426.6	427.4	1.05
KDD121	427.4	428.0	4.92
KDD121	428.0	429.0	0.77
KDD121	429.0	430.0	0.18
KDD121	430.0	431.0	0.20
KDD121	431.0	432.0	0.77
KDD121	439.3	440.0	0.22
KDD121	440.0	441.0	3.36
KDD121	441.0	442.0	0.14
KDD121	442.0	443.0	0.27
KDD123	230.0	231.0	0.21
KDD123	231.0	232.0	0.44
KDD123	232.0	233.0	0.10
KDD123	233.0	234.0	0.26
KDD123	238.0	239.0	0.29
KDD123	239.0	240.0	0.32
KDD123	240.0	241.0	0.64
KDD123	241.0	242.0	0.48
KDD123	242.0	243.0	0.51
KDD123	246.0	247.0	0.27
KDD123	247.0	248.0	5.14
KDD123	248.0	249.0	0.34
KDD123	249.0	250.0	0.05
KDD123	250.0	251.0	0.25
KDD123	251.0	252.0	0.03
KDD123	252.0	253.0	0.05
KDD123	253.0	254.0	0.26
KDD123	254.0	255.0	0.07
KDD123	255.0	256.0	0.02
KDD123	256.0	257.0	0.34
KDD123	257.0	258.0	0.32
KDD123	258.0	259.0	0.21
KDD123	259.0	260.0	0.13
KDD123	260.0	261.0	0.06
KDD123	261.0	262.0	0.27
KDD123	265.0	266.0	1.10
KDD123	266.0	267.0	0.18
KDD123	267.0	268.0	0.15
KDD123	268.0	269.0	0.34
KDD123	269.0	270.0	0.11
KDD123	270.0	271.0	1.10
KDD123	271.0	272.0	0.62
KDD123	272.0	273.0	0.40
KDD123	273.0	274.0	0.34
KDD123	274.0	275.0	0.45
KDD123	275.0	276.0	2.19
KDD123	276.0	277.0	0.27
KDD123	277.0	278.0	0.67
KDD123	278.0	279.0	1.89
KDD123	279.0	280.0	2.86
KDD123	280.0	281.0	0.40
KDD123	281.0	282.0	0.49
KDD123	282.0	283.0	1.13
KDD123	283.0	283.7	0.29
KDD123	283.7	284.3	0.17
KDD123	284.3	285.1	0.05

Hole ID	From (m)	To (m)	Gold g/t
KDD123	285.1	286.0	1.07
KDD123	286.0	287.0	0.22
KDD123	287.0	288.0	0.14
KDD123	288.0	289.0	1.03
KDD123	289.0	290.0	0.20
KDD123	294.0	295.0	0.42
KDD123	295.0	296.0	0.63
KDD123	296.0	297.0	1.04
KDD123	297.0	298.0	1.99
KDD123	298.0	299.0	0.23
KDD123	299.0	300.0	0.21
KDD123	300.0	301.0	1.03
KDD123	301.0	302.0	0.80
KDD123	302.0	303.0	0.22
KDD123	303.0	304.0	0.31
KDD123	307.0	308.0	0.41
KDD123	308.0	309.0	2.54
KDD123	309.0	310.0	1.96
KDD123	310.0	310.5	0.73
KDD123	336.5	337.0	2.26
KDD123	337.0	338.0	4.25
KDD123	338.0	338.8	0.03
KDD123	338.8	339.6	0.24
KDD123	339.6	341.2	0.14
KDD123	341.2	342.0	4.03
KDD123	342.0	343.0	0.05
KDD123	343.0	343.9	0.46
KDD123	343.9	345.9	0.04
KDD123	345.9	347.0	0.01
KDD123	347.0	348.0	0.28
KDD123	348.0	349.0	0.24
KDD123	349.0	350.0	0.06
KDD123	350.0	351.0	0.98
KDD123	351.0	352.0	0.51
KDD123	352.0	352.6	1.63
KDD123	352.6	353.3	0.09
KDD123	353.3	353.8	0.01
KDD123	353.8	354.8	0.44
KDD123	354.8	355.8	0.53
KDD123	358.5	359.0	0.64
KDD123	359.0	360.0	0.14
KDD123	360.0	361.0	1.73
KDD123	361.0	362.0	0.72
KDD123	362.0	363.0	0.10
KDD123	363.0	364.0	0.02
KDD123	364.0	365.0	1.23
KDD123	365.0	366.0	1.50
KDD123	366.0	367.0	0.04
KDD123	367.0	368.0	0.20
KDD123	368.0	369.0	0.25
KDD123	369.0	370.0	0.10
KDD123	370.0	371.0	3.13
KDD123	371.0	372.0	9.00
KDD123	372.0	373.0	0.38
KDD123	373.0	374.0	2.73
KDD123	374.0	374.6	5.81
KDD123	374.6	375.6	185.00
KDD125	405.0	406.0	0.46
KDD125	406.0	407.0	1.34
KDD125	407.0	408.0	0.44

Hole ID	From (m)	To (m)	Gold g/t
KDD125	408.0	409.0	0.27
KDD125	409.0	410.0	0.35
KDD125	410.0	411.0	0.13
KDD125	411.0	412.0	0.40
KDD125	412.0	413.0	0.26
KDD125	413.0	414.0	0.12
KDD125	414.0	415.0	0.30
KDD125	420.0	421.0	0.26
KDD125	421.0	421.7	0.24
KDD125	421.7	422.3	0.10
KDD125	422.3	422.8	0.21
KDD125	422.8	423.7	0.12
KDD125	423.7	424.4	0.12
KDD125	424.4	425.0	0.87
KDD125	425.0	426.0	0.40
KDD125	426.0	427.0	0.31
KDD125	427.0	428.0	0.99
KDD125	428.0	429.0	0.47
KDD125	429.0	430.0	0.43
KDD125	430.0	431.0	1.96
KDD125	431.0	432.0	0.78
KDD125	432.0	433.0	0.13
KDD125	433.0	434.0	0.31
KDD125	434.0	435.0	18.90
KDD125	435.0	436.0	7.77
KDD125	436.0	437.0	3.09
KDD125	437.0	438.0	1.31
KDD125	438.0	439.0	4.05
KDD125	439.0	440.0	0.50
KDD125	440.0	441.0	0.34
KDD125	441.0	442.0	0.33
KDD125	442.0	443.0	0.80
KDD125	443.0	444.0	0.61
KDD125	444.0	445.0	1.93
KDD125	445.0	446.0	0.90
KDD125	446.0	447.0	1.43
KDD126	227.0	228.0	0.24
KDD126	228.0	229.0	0.88
KDD126	229.0	230.0	0.64
KDD126	230.0	231.0	0.17
KDD126	231.0	232.0	0.05
KDD126	232.0	233.0	0.25
KDD126	236.0	237.0	1.32
KDD126	237.0	238.0	1.06
KDD126	238.0	239.0	0.24
KDD126	239.0	240.0	0.33
KDD126	240.0	241.0	0.33
KDD126	241.0	242.0	0.29
KDD126	242.0	243.0	0.25
KDD126	243.0	244.0	0.04
KDD126	244.0	245.0	1.00
KDD126	245.0	246.0	0.16
KDD126	246.0	247.0	0.39
KDD126	304.0	305.0	0.33
KDD126	305.0	306.0	1.11
KDD126	306.0	307.0	0.74
KDD126	307.0	307.8	0.44
KDD126	307.8	308.3	0.74
KDD126	308.3	309.0	0.03
KDD126	309.0	310.0	0.58

Hole ID	From (m)	To (m)	Gold g/t
KDD126	310.0	311.0	0.40
KDD126	311.0	312.0	0.51
KDD126	312.0	313.0	1.20
KDD126	313.0	314.0	1.53
KDD126	314.0	314.8	0.29
KDD126	314.8	316.8	0.01
KDD126	316.8	318.8	0.02
KDD126	318.8	319.5	0.21
KDD126	319.5	320.5	0.25
KDD128	363.6	364.3	1.97
KDD128	364.3	365.0	2.38
KDD128	365.0	366.0	6.74
KDD128	366.0	367.0	0.29
KDD128	367.0	367.6	0.23
KDD128	367.6	368.6	0.11
KDD128	368.6	369.6	0.39
KDD128	369.6	370.6	3.46
KDD128	370.6	371.2	0.56
KDD128	371.2	372.2	0.64
KDD128	372.2	373.2	0.24
KDD128	373.2	374.2	0.51
KDD128	374.2	375.2	0.73
KDD128	375.2	376.2	0.24
KDD128	376.2	377.2	0.73
KDD128	377.2	378.2	0.45
KDD128	378.2	379.2	0.16
KDD128	379.2	380.5	0.23
KDD129	533.0	534.0	0.40
KDD129	534.0	535.0	0.57
KDD129	535.0	536.0	0.11
KDD129	536.0	537.0	0.45
KDD129	541.0	542.0	0.25
KDD129	542.0	543.0	0.18
KDD129	543.0	544.0	0.08
KDD129	544.0	545.0	0.47
KDD129	554.0	555.0	2.79
KDD129	555.0	556.0	0.07
KDD129	556.0	557.0	0.63
KDD129	564.8	565.8	0.47
KDD129	565.8	566.8	0.09
KDD129	566.8	567.8	1.52
KDD129	567.8	568.8	2.52
KDD129	568.8	569.8	4.87
KDD129	569.8	570.8	0.11
KDD129	570.8	571.8	1.25
KDD129	571.8	572.8	8.25
KDD129	572.8	573.8	1.24
KDD129	573.8	574.8	0.79
KDD129	574.8	575.8	2.61
KDD129	575.8	576.8	0.25
KDD129	576.8	578.8	0.02
KDD129	578.8	579.4	0.82
KDD129	579.4	580.0	1.90
KDD129	580.0	581.0	0.64
KDD129	581.0	582.0	0.02
KDD129	582.0	582.9	0.02
KDD129	582.9	584.0	2.68
KDD129	584.0	585.0	0.65
KDD129	585.0	586.0	2.82
KDD129	586.0	587.0	0.92

Hole ID	From (m)	To (m)	Gold g/t
KDD129	587.0	588.0	0.18
KDD129	588.0	589.0	5.44
KDD129	589.0	590.0	2.43
KDD129	590.0	591.0	2.44
KDD129	591.0	592.0	23.52
KDD129	592.0	593.0	8.16
KDD129	593.0	594.0	19.50
KDD129	594.0	595.0	1.35
KDD129	595.0	596.0	6.91
KDD129	596.0	597.0	1.00
KDD129	597.0	598.0	0.53
KDD129	598.0	599.0	38.07
KDD129	599.0	599.5	0.50
KDD129	599.5	601.0	0.05
KDD129	601.0	602.0	0.30
KDD129	602.0	603.0	0.33
KDD129	603.0	604.1	0.45
KDD129	670.0	671.0	0.43
KDD129	671.0	672.0	0.20
KDD129	672.0	673.0	0.26
KDD129	673.0	674.0	1.88
KDD129	674.0	675.0	0.39
KDD129	678.0	679.0	0.43
KDD129	679.0	679.4	0.06
KDD129	679.4	681.0	0.02
KDD129	681.0	682.0	0.65
KDD129	682.0	683.0	8.36
KDD129	683.0	684.0	0.21
KDD129	684.0	685.0	0.32
KDD129	719.0	720.0	0.51
KDD129	720.0	721.0	0.14
KDD129	721.0	722.0	0.95
KDD129	738.0	739.0	0.40
KDD129	739.0	740.0	0.13
KDD129	740.0	741.0	0.17
KDD129	741.0	742.0	0.60
KDD129	742.0	743.0	0.20
KDD131	392.2	393.0	0.70
KDD131	393.0	394.0	2.18
KDD131	394.0	395.0	0.82
KDD131	395.0	396.0	0.83
KDD131	396.0	397.0	0.42
KDD131	397.0	397.9	0.41
KDD131	502.4	503.2	1.54
KDD131	503.2	504.0	0.46
KDD131	504.0	505.0	5.31
KDD131	505.0	507.0	0.22
KDD131	543.6	544.2	1.61
KDD131	544.2	545.0	2.24
KDD131	545.0	546.0	1.98
KDD131	546.0	547.0	0.91
KDD131	547.0	548.0	0.34
KDD131	548.0	549.0	0.22
KDD131	549.0	550.0	0.69
KDD131	550.0	551.0	0.47
KDD131	551.0	552.0	0.31
KDD131	552.0	553.0	0.66
KDD131	553.0	554.0	0.37
KDD131	554.0	555.0	0.28
KDD131	555.0	556.0	0.09

Hole ID	From (m)	To (m)	Gold g/t
KDD131	556.0	557.0	0.13
KDD131	557.0	558.0	0.24
KDD131	558.0	559.0	0.23
KDD132	454.6	455.1	0.59
KDD132	455.1	456.1	0.29
KDD132	456.1	456.6	0.56
KDD132	464.2	465.2	0.23
KDD132	465.2	466.2	0.08
KDD132	466.2	467.2	0.23
KDD132	467.2	468.2	0.62
KDD132	468.2	469.2	0.11
KDD132	469.2	470.2	1.39
KDD132	477.2	478.2	0.20
KDD132	478.2	479.2	0.63
KDD132	479.2	480.2	0.22
KDD132	480.2	481.2	0.32
KDD132	493.9	494.4	0.43
KDD132	494.4	495.4	0.13
KDD132	495.4	496.4	0.32
KDD132	496.4	497.4	1.28
KDD132	497.4	498.4	0.08
KDD132	498.4	499.4	1.18
KDD132	499.4	500.4	0.18
KDD132	500.4	501.4	1.08
KDD132	501.4	502.4	0.12
KDD132	502.4	503.4	0.06
KDD132	503.4	504.1	1.92
KDD132	509.2	509.7	0.50
KDD132	509.7	510.7	1.68
KDD132	510.7	511.3	0.02
KDD132	511.3	512.0	0.01
KDD132	512.0	512.5	0.27
KDD132	512.5	513.5	0.04
KDD132	513.5	514.5	0.05
KDD132	514.5	515.5	0.28
KDD132	515.5	516.5	0.20
KDD132	516.5	517.5	0.26
KDD132	517.5	518.5	0.12
KDD132	518.5	519.5	0.07
KDD132	519.5	520.5	1.49
KDD132	520.5	521.5	0.23
KDD132	590.0	591.0	0.63
KDD132	591.0	592.0	0.54
KDD132	592.0	593.0	0.24
KDD132	612.0	613.3	1.75
KDD132	613.3	615.1	0.07
KDD132	615.1	616.0	0.72
KDD132	616.0	617.0	1.05
KDD132	617.0	618.0	1.37
KDD132	618.0	619.0	1.44
KDD132	619.0	620.0	1.09
KDD132	620.0	621.0	0.98
KDD132	621.0	622.0	0.17
KDD132	622.0	623.0	4.81
KDD132	623.0	624.0	4.00
KDD132	624.0	625.0	1.45
KDD132	625.0	626.0	2.56
KDD132	626.0	627.0	0.63
KDD132	627.0	628.0	1.67
KDD132	628.0	629.0	3.05

Hole ID	From (m)	To (m)	Gold g/t
KDD132	651.0	652.0	0.58
KDD132	652.0	653.0	0.04
KDD132	653.0	654.0	0.35
KDD132	663.0	664.0	0.90
KDD132	664.0	665.0	0.21
KDD132	665.0	666.0	0.08
KDD132	666.0	667.0	0.43
KDD133	276.0	277.0	0.23
KDD133	277.0	278.0	0.43
KDD133	278.0	279.0	0.22
KDD133	279.0	280.0	0.11
KDD133	280.0	281.0	0.20
KDD133	285.0	286.0	0.57
KDD133	286.0	287.0	0.19
KDD133	287.0	288.0	0.28
KDD133	294.0	295.0	1.64
KDD133	295.0	296.0	0.51
KDD133	296.0	297.0	0.14
KDD133	297.0	298.0	0.41
KDD133	298.0	299.0	0.12
KDD133	299.0	300.0	0.54
KDD133	300.0	301.0	0.22
KDD133	301.0	302.0	0.23
KDD133	302.0	303.0	1.11
KDD133	303.0	304.0	0.02
KDD133	304.0	304.7	0.31
KDD133	308.0	308.7	0.87
KDD133	308.7	309.3	0.01
KDD133	309.3	310.0	1.00
KDD133	310.0	310.8	0.32
KDD133	310.8	311.4	1.66
KDD133	311.4	312.2	3.45
KDD133	367.0	368.0	4.83
KDD133	368.0	369.0	0.09
KDD133	369.0	370.0	0.63
KDD133	370.0	370.7	0.05
KDD133	370.7	371.2	0.03
KDD133	371.2	372.0	0.39
KDD133	372.0	372.6	0.61
KDD133	372.6	374.6	0.02
KDD133	374.6	376.6	0.01
KDD133	376.6	377.5	0.77
KDD133	377.5	378.0	0.40
KDD133	378.0	378.7	4.61
KDD133	381.0	382.0	1.50
KDD133	382.0	383.0	1.62
KDD133	383.0	384.0	0.25
KDD133	384.0	385.8	0.02
KDD133	385.8	386.4	0.56
KDD133	386.4	387.0	0.29
KDD133	387.0	388.0	0.99
KDD133	388.0	389.0	0.35
KDD133	389.0	390.0	0.26
KDD133	390.0	390.7	0.19
KDD133	390.7	392.1	0.04
KDD133	392.1	393.0	0.30
KDD133	393.0	394.0	0.49
KDD133	394.0	395.0	3.45
KDD133	395.0	396.0	0.04
KDD133	396.0	397.0	0.71

Hole ID	From (m)	To (m)	Gold g/t
KDD133	397.0	398.0	0.96
KDD133	398.0	399.0	1.26
KDD133	399.0	400.0	1.23
KDD133	400.0	401.0	0.27
KDD133	401.0	402.0	0.70
KDD133	402.0	403.0	0.71
KDD133	406.0	407.0	0.35
KDD133	407.0	408.0	7.84
KDD133	408.0	409.0	14.01
KDD133	409.0	410.0	1.66
KDD133	410.0	411.0	1.87
KDD133	411.0	412.0	1.38
KDD133	412.0	413.0	0.49
KDD133	413.0	414.0	2.19
KDD133	414.0	415.0	0.56
KDD133	415.0	416.0	15.11
KDD133	416.0	417.0	0.13
KDD133	417.0	418.0	0.06
KDD133	418.0	419.0	0.46
KDD133	419.0	420.0	0.81
KDD133	420.0	421.0	1.59
KDD133	421.0	422.0	6.32
KDD133	422.0	422.8	2.26
KDD133	422.8	423.5	1.24
KDD134	535.8	536.8	0.36
KDD134	536.8	537.6	0.38
KDD134	537.6	538.2	0.85
KDD134	538.2	538.8	0.64
KDD134	538.8	539.5	17.09
KDD134	539.5	540.5	11.08
KDD134	540.5	541.4	14.89
KDD134	541.4	542.4	7.78
KDD134	542.4	543.4	7.49
KDD134	543.4	544.4	0.55
KDD134	544.4	545.4	0.26
KDD134	545.4	546.4	0.76
KDD134	546.4	547.4	0.16
KDD134	547.4	548.4	1.44
KDD134	548.4	549.4	0.32
KDD134	549.4	550.4	0.29
KDD134	550.4	550.9	0.42
KDD134	550.9	551.6	1.63
KDD134	551.6	552.2	2.88
KDD134	552.2	553.2	0.61
KDD134	553.2	554.2	0.35
KDD134	554.2	555.2	22.56
KDD134	555.2	556.2	3.91
KDD134	556.2	557.2	3.81
KDD134	557.2	558.2	0.34
KDD134	562.2	563.2	0.25
KDD134	563.2	564.2	0.46
KDD134	564.2	565.2	1.16
KDD134	565.2	566.2	0.29
KRC568	155.0	156.0	0.73
KRC568	156.0	157.0	0.49
KRC568	157.0	158.0	0.11
KRC568	158.0	159.0	0.92
KRC568	159.0	160.0	0.35
KRC568	160.0	161.0	0.28
KRC568	161.0	162.0	0.56

Hole ID	From (m)	To (m)	Gold g/t
KRC568	162.0	163.0	2.22
KRC568	163.0	164.0	0.69
KRC568	164.0	165.0	1.22
KRC568	165.0	166.0	0.65
KRC568	166.0	167.0	0.64
KRC568	172.0	173.0	1.22
KRC568	173.0	174.0	0.30
KRC568	174.0	175.0	0.02
KRC568	175.0	176.0	0.02
KRC568	176.0	177.0	0.25
KRC568	177.0	178.0	28.20
KRC568	178.0	179.0	1.35
KRC568	179.0	180.0	3.03
KRC568	180.0	181.0	0.25
KRC568	184.0	185.0	1.32
KRC568	185.0	186.0	1.38
KRC568	186.0	187.0	0.90
KRC568	229.0	230.0	0.47
KRC568	230.0	231.0	0.56
KRC568	231.0	232.0	0.45
KRC568	232.0	233.0	0.22
KRC568	233.0	234.0	1.07
KRC568	234.0	235.0	2.24
KRC568	235.0	236.0	1.85
KRC568	236.0	237.0	0.93
KRC568	237.0	238.0	0.20
KRC568	238.0	239.0	0.33
KRC568	239.0	240.0	0.38
KRC568	240.0	241.0	1.37
KRC568	241.0	242.0	2.57
KRC568	242.0	243.0	2.35
KRC568	243.0	244.0	0.69
KRC568	244.0	245.0	0.98
KRC568	245.0	246.0	2.04
KRC568	246.0	247.0	1.82
KRC568	247.0	248.0	0.90
KRC568	248.0	249.0	0.73
KRC568	249.0	250.0	0.20
KRC568	250.0	251.0	0.04
KRC568	251.0	252.0	2.59
KRC570	30.0	31.0	0.94
KRC570	31.0	32.0	0.35
KRC570	32.0	33.0	0.24
KRC570	33.0	34.0	0.11
KRC570	34.0	35.0	0.03
KRC570	35.0	36.0	0.21
KRC570	36.0	37.0	0.59
KRC570	37.0	38.0	0.03
KRC570	38.0	39.0	0.54
KRC570	39.0	40.0	0.09
KRC570	40.0	41.0	0.12
KRC570	41.0	42.0	0.34
KRC570	42.0	43.0	1.01
KRC570	43.0	44.0	0.38
KRC570	44.0	45.0	0.81
KRC570	45.0	46.0	0.51
KRC570	46.0	47.0	0.12
KRC570	47.0	48.0	0.14
KRC570	48.0	49.0	0.52
KRC570	49.0	50.0	0.49

Hole ID	From (m)	To (m)	Gold g/t
KRC570	50.0	51.0	0.49
KRC570	51.0	52.0	0.03
KRC570	52.0	53.0	0.77
KRC570	53.0	54.0	2.69
KRC570	54.0	55.0	0.70
KRC570	55.0	56.0	0.58
KRC570	56.0	57.0	0.62
KRC570	57.0	58.0	0.45
KRC570	58.0	59.0	0.83
KRC570	59.0	60.0	0.90
KRC570	60.0	61.0	0.86
KRC570	61.0	62.0	0.78
KRC570	62.0	63.0	0.20
KRC570	63.0	64.0	0.03
KRC570	64.0	65.0	0.48
KRC570	65.0	66.0	0.30
KRC570	66.0	67.0	0.99
KRC570	67.0	68.0	0.06
KRC570	68.0	69.0	0.06
KRC570	69.0	70.0	0.21
KRC571	102.0	103.0	1.08
KRC571	103.0	104.0	0.11
KRC571	104.0	105.0	0.35
KRC571	105.0	106.0	0.53
KRC571	106.0	107.0	0.80
KRC571	107.0	108.0	0.78
KRC571	108.0	109.0	0.67
KRC571	109.0	110.0	1.90
KRC571	110.0	111.0	0.91
KRC571	111.0	112.0	0.47
KRC571	112.0	113.0	0.23
KRC571	113.0	114.0	0.79
KRC571	114.0	115.0	1.04
KRC571	115.0	116.0	2.53
KRC571	116.0	117.0	2.17
KRC571	117.0	118.0	0.89
KRC571	118.0	119.0	0.35
KRC571	119.0	120.0	0.71
KRC571	120.0	121.0	1.07
KRC571	121.0	122.0	2.28
KRC571	122.0	123.0	1.86
KRC571	123.0	124.0	6.11
KRC571	124.0	125.0	0.42
KRC571	125.0	126.0	1.61
KRC571	126.0	127.0	1.16
KRC571	127.0	128.0	0.77
KRC571	128.0	129.0	0.23
KRC571	129.0	130.0	0.20
KRC571	130.0	131.0	0.25
KRC571	131.0	132.0	0.50
KRC571	132.0	133.0	0.41
KRC572	25.0	26.0	0.24
KRC572	26.0	27.0	0.11
KRC572	27.0	28.0	0.04
KRC572	28.0	29.0	0.25
KRC572	29.0	30.0	0.23
KRC572	30.0	31.0	0.67
KRC572	31.0	32.0	0.43
KRC572	32.0	33.0	0.12
KRC572	33.0	34.0	0.20

Hole ID	From (m)	To (m)	Gold g/t
KRC572	34.0	35.0	0.11
KRC572	35.0	36.0	0.43
KRC572	36.0	37.0	0.47
KRC572	40.0	41.0	0.21
KRC572	41.0	42.0	1.00
KRC572	42.0	43.0	0.03
KRC572	43.0	44.0	0.85
KRC572	44.0	45.0	0.12
KRC572	45.0	46.0	0.91
KRC572	46.0	47.0	0.51
KRC572	47.0	48.0	0.58
KRC572	48.0	49.0	0.03
KRC572	49.0	50.0	0.57
KRC572	55.0	56.0	0.56
KRC572	56.0	57.0	0.15
KRC572	57.0	58.0	0.14
KRC572	58.0	59.0	0.48
KRC572	59.0	60.0	0.33
KRC572	60.0	61.0	0.79
KRC572	61.0	62.0	0.04
KRC572	62.0	63.0	0.08
KRC572	63.0	64.0	0.25
KRC572	64.0	65.0	0.35
KRC572	65.0	66.0	0.63
KRC572	105.0	106.0	0.53
KRC572	106.0	107.0	0.74
KRC572	107.0	108.0	0.14
KRC572	108.0	109.0	0.29
KRC572	109.0	110.0	4.98
KRC572	110.0	111.0	9.58
KRC572	111.0	112.0	1.49
KRC572	112.0	113.0	0.22
KRC572	113.0	114.0	1.62
KRC572	114.0	115.0	0.08
KRC572	115.0	116.0	0.70
KRC572	116.0	117.0	0.74
KRC572	122.0	123.0	0.26
KRC572	123.0	124.0	0.05
KRC572	124.0	125.0	0.03
KRC572	125.0	126.0	0.27
KRC572	126.0	127.0	0.07
KRC572	127.0	128.0	0.17
KRC572	128.0	129.0	1.53
KRC572	129.0	130.0	0.42
KRC572	130.0	131.0	0.02
KRC572	131.0	132.0	0.03
KRC572	132.0	133.0	0.31
KRC572	133.0	134.0	0.76
KRC572	143.0	144.0	0.49
KRC572	144.0	145.0	7.13
KRC572	145.0	146.0	4.41
KRC572	146.0	147.0	3.71
KRC572	147.0	148.0	0.82
KRC573	176.0	177.0	0.22
KRC573	177.0	178.0	1.28
KRC573	178.0	179.0	0.15
KRC573	179.0	180.0	0.28
KRC573	180.0	181.0	1.42
KRC573	181.0	182.0	0.09
KRC573	182.0	183.0	0.94

Hole ID	From (m)	To (m)	Gold g/t
KRC573	183.0	184.0	0.80
KRC573	184.0	185.0	0.49
KRC573	185.0	186.0	0.34
KRC573	186.0	187.0	2.26
KRC573	187.0	188.0	1.51
KRC573	188.0	189.0	0.06
KRC573	189.0	190.0	0.45
KRC573	190.0	191.0	3.99
KRC573	191.0	192.0	3.96
KRC573	195.0	196.0	0.38
KRC573	196.0	197.0	0.58
KRC573	197.0	198.0	2.41
KRC573	198.0	199.0	0.26
KRC573	199.0	200.0	0.30
KRC573	200.0	201.0	0.29
KRC573	201.0	202.0	0.23
KRC573	202.0	203.0	0.39
KRC573	203.0	204.0	0.15
KRC573	204.0	205.0	0.23
KRC573	205.0	206.0	0.76
KRC574	193.0	194.0	4.81
KRC574	194.0	195.0	5.33
KRC574	195.0	196.0	0.47
KRC574	202.0	203.0	0.29
KRC574	203.0	204.0	0.08
KRC574	204.0	205.0	0.02
KRC574	205.0	206.0	2.84
KRC574	206.0	207.0	2.12
KRC574	207.0	208.0	0.34
KRC574	208.0	209.0	0.44
KRC574	209.0	210.0	0.34
KRC574	210.0	211.0	0.81
KRC574	211.0	212.0	0.30
KRC574	212.0	213.0	0.43
KRC574	213.0	214.0	0.31
KRC574	214.0	215.0	0.01
KRC574	215.0	216.0	0.49
KRC574	216.0	217.0	0.34
KRC574	217.0	218.0	0.22
KRC574	218.0	219.0	0.13
KRC574	219.0	220.0	0.38
KRC574	225.0	226.0	0.95
KRC574	226.0	227.0	0.32
KRC574	227.0	228.0	0.14
KRC574	228.0	229.0	0.19
KRC574	229.0	230.0	1.81
KRC574	230.0	231.0	0.79
KRC574	231.0	232.0	0.77
KRC574	232.0	233.0	0.37
KRC574	233.0	234.0	0.33
KRC574	234.0	235.0	0.21
KRC574	235.0	236.0	0.20
KRC574	236.0	237.0	0.32
KRC574	237.0	238.0	0.36
KRC574	238.0	239.0	1.18
KRC574	239.0	240.0	1.94
KRC574	240.0	241.0	0.20
KRC574	241.0	242.0	0.27
KRC574	242.0	243.0	0.27
KRC574	243.0	244.0	0.20

Hole ID	From (m)	To (m)	Gold g/t
KRC574	244.0	245.0	0.18
KRC574	245.0	246.0	0.58
KRC574	246.0	247.0	0.63
KRC574	247.0	248.0	0.28
KRC574	248.0	249.0	0.23
KRC574	249.0	250.0	0.30
KRC574	250.0	251.0	0.49
KRC574	251.0	252.0	0.22
KRC574	252.0	253.0	0.16
KRC574	253.0	254.0	0.20
KRC574	254.0	255.0	0.19
KRC574	255.0	256.0	0.28
KRC575	280.0	281.0	0.72
KRC575	281.0	282.0	0.24
KRC575	282.0	283.0	0.32
KRC575	310.0	311.0	0.30
KRC575	311.0	312.0	0.38
KRC575	312.0	313.0	0.47
KRC576	91.0	92.0	0.22
KRC576	92.0	93.0	0.18
KRC576	93.0	94.0	3.37
KRC576	94.0	95.0	0.27
KRC576	95.0	96.0	0.32
KRC576	249.0	250.0	0.23
KRC576	250.0	251.0	0.23
KRC576	251.0	252.0	0.51
KRC576	252.0	253.0	0.56
KRC576	253.0	254.0	0.27
KRC576	254.0	255.0	0.32
KRC576	255.0	256.0	0.34
KRC576	256.0	257.0	0.31
KRC576	257.0	258.0	0.31
KRC576	258.0	259.0	0.31
KRC576	259.0	260.0	0.34
KRC576	260.0	261.0	0.32
KRC576	261.0	262.0	0.99
KRC576	262.0	263.0	0.53
KRC576	263.0	264.0	2.66
KRC576	264.0	265.0	0.47
KRC576	265.0	266.0	0.27
KRC576	266.0	267.0	0.49
KRC576	267.0	268.0	0.53
KRC576	268.0	269.0	0.30
KRC576	269.0	270.0	0.46
KRC576	270.0	271.0	0.39
KRC576	271.0	272.0	0.32
KRC576	272.0	273.0	0.41
KRC576	273.0	274.0	0.04
KRC576	274.0	275.0	0.36
KRC576	275.0	276.0	0.19
KRC576	276.0	277.0	0.17
KRC576	277.0	278.0	0.21
KRC576	278.0	279.0	0.26
KRC576	279.0	280.0	0.29
KRC576	280.0	281.0	0.29
KRC576	281.0	282.0	0.46
KRC576	282.0	283.0	0.44
KRC576	283.0	284.0	2.29
KRC576	284.0	285.0	0.44
KRC576	285.0	286.0	1.10

Hole ID	From (m)	To (m)	Gold g/t
KRC576	286.0	287.0	0.54
KRC576	287.0	288.0	0.46
KRC576	288.0	289.0	0.21
KRC576	289.0	290.0	0.18
KRC576	290.0	291.0	0.66
KRC576	291.0	292.0	1.36
KRC576	292.0	293.0	0.23
KRC577	297.0	298.0	0.29
KRC577	298.0	299.0	2.55
KRC577	299.0	300.0	1.67
KRC577	300.0	301.0	0.25
KRC577	301.0	302.0	0.38
KRC577	302.0	303.0	0.36
KRC577	303.0	304.0	0.74
KRC577	304.0	305.0	1.08
KRC577	305.0	306.0	0.20
KRC577	306.0	307.0	0.27
KRC577	316.0	317.0	0.60
KRC577	317.0	318.0	1.51
KRC577	318.0	319.0	0.79
KRC577	319.0	320.0	0.48
KRC577	320.0	321.0	0.84
KRC577	321.0	322.0	1.38
KRC577	322.0	323.0	0.76
KRC577	323.0	324.0	1.36
KRC577	324.0	325.0	0.95
KRC577	325.0	326.0	1.44
KRC577	326.0	327.0	0.27
KRC577	327.0	328.0	0.32
KRC577	328.0	329.0	0.91
KRC577	329.0	330.0	0.65
KRC577	330.0	331.0	0.83
KRC577	331.0	332.0	1.08
KRC577	332.0	333.0	2.25
KRC577	333.0	334.0	4.49
KRC577	334.0	335.0	10.85
KRC577	335.0	336.0	1.88
KRC577	336.0	337.0	2.07
KRC577	337.0	338.0	1.71
KRC577	338.0	339.0	0.73
KRC577	339.0	340.0	1.42
KRC577	340.0	341.0	0.47
KRC577	341.0	342.0	0.73
KRC577	342.0	343.0	0.50
KRC577	343.0	344.0	0.56
KRC577	344.0	345.0	0.64
KRC577	345.0	346.0	0.67
KRC577	346.0	347.0	0.72
KRC577	347.0	348.0	1.49
KRC577	348.0	349.0	0.83
KRC577	349.0	350.0	2.36
KRC577	354.0	355.0	0.30
KRC577	355.0	356.0	2.19
KRC577	356.0	357.0	0.56
KRC577	357.0	358.0	0.43

Hole ID	From (m)	To (m)	Gold g/t
KRC577	358.0	359.0	0.47
KRC577	359.0	360.0	0.22
KRC577	360.0	361.0	0.57
KRC577	361.0	362.0	0.64
KRC577	362.0	363.0	0.94
KRC577	363.0	364.0	0.34
KRC577	364.0	365.0	0.21
KRC577	365.0	366.0	0.27
KRC577	366.0	367.0	0.37
KRC577	367.0	368.0	52.20
KRC577	368.0	369.0	21.00
KRC577	369.0	370.0	3.32
KRC577	370.0	371.0	1.11
KRC577	371.0	372.0	0.45
KRC578	20.0	21.0	0.28
KRC578	21.0	22.0	0.10
KRC578	22.0	23.0	0.46
KRC578	23.0	24.0	0.20
KRC578	24.0	25.0	0.27
KRC578	25.0	26.0	0.20
KRC578	26.0	27.0	0.44
KRC578	27.0	28.0	0.79
KRC578	28.0	29.0	0.47
KRC578	357.0	358.0	0.96
KRC578	358.0	359.0	0.27
KRC578	359.0	360.0	0.05
KRC578	360.0	361.0	0.04
KRC578	361.0	362.0	0.23
KRC578	362.0	363.0	0.22
KRC578	363.0	364.0	0.12
KRC578	364.0	365.0	0.23
KRC578	365.0	366.0	0.48
KRC578	372.0	373.0	0.37
KRC578	373.0	374.0	0.50
KRC578	374.0	375.0	0.45
KRC578	375.0	376.0	0.49
KRC578	376.0	377.0	0.65
KRC578	377.0	378.0	1.54
KRC578	378.0	379.0	0.42
KRC578	379.0	380.0	0.33
KRC578	380.0	381.0	0.43
KRC578	381.0	382.0	1.96
KRC578	382.0	383.0	1.28
KRC578	383.0	384.0	2.20
KRC578	384.0	385.0	0.52
KRC578	385.0	386.0	0.46
KRC578	386.0	387.0	0.60
KRC578	387.0	388.0	1.07
KRC578	388.0	389.0	1.13
KRC578	389.0	390.0	1.69
KRC578	390.0	391.0	0.71
KRC578	391.0	392.0	5.87
KRC578	392.0	393.0	1.80
KRC578	393.0	394.0	0.94
KRC578	394.0	395.0	0.25

Appendix 3. JORC Table 1 Reporting

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Reverse circulation (RC) drilling was completed using a dedicated RC rig. RC samples were collected from the drill rig cyclone over 1 m down-hole intervals and subsampled by cone-splitting; full length of the drill holes was sampled. Samples are typically circa 2-4kg weight. A duplicate sample was retained on site for future reference. Diamond drilling was completed using a dedicated diamond rig. Drillholes were angled at -60° from surface. Diamond core was cut in half using a core saw for HQ diameters; NQ diameters were sampled full core. Sampling intervals are decided by a Company Geologist, based on the lithological contacts and on any change in alteration or mineralisation style. Core sample length vary between 0.5m and 2m. The half core sampling is done by a Company Geologist.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> RC drilling utilised 140 mm (5.5 inch) face sampling bits. Diamond drilling was undertaken at HQ (drill holes from surface) or NQ (from surface or as diamond tails) diameters, and oriented using the Reflex Act III digital core orientation equipment.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> RC recoveries were determined by weighting each drill metre bag. Samples are sieved and logged by supervising Geologist; sample weight, quality, moisture and any contamination are recorded. RC samples quality and recovery was excellent, with dry samples and consistent weight obtained. Drill core recoveries were recorded at the drill rig. Core recoveries were excellent for all the drill programs. Sample bias is not expected with the cut core.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource 	<ul style="list-style-type: none"> The entire length of all RC and diamond holes were logged by Company geologists using industry standard methods, including recording of lithology, alteration, mineralisation and

Criteria	JORC Code explanation	Commentary
	<p><i>estimation, mining studies and metallurgical studies.</i></p> <ul style="list-style-type: none"> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<p>weathering. Sieved RC sample collected for logging were stored in chip trays for future geological reference and all core was routinely photographed. All core was geotechnically logged, including recording of RQD and fracture frequency.</p> <ul style="list-style-type: none"> • The logging is qualitative and quantitative in nature and is of appropriate detail for support the current Mineral Resource estimates.
<p>Sub-sampling techniques and sample preparation</p>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • The RC samples were collected from the rig cyclone and passed through a riffle splitter to reduce sample weight to a circa 2-4kg. • The sampling technique is considered industry standard and effective for this style of drilling. • Samples were crushed and pulverized at the ALS laboratory in Okahandja before being shipped to Johannesburg for assay. • RC samples were assayed using method Au-AA24 for gold. • The sample preparation procedures carried out are considered acceptable. Blanks, standards (CRM) and duplicates are used to monitor Quality Control and representativeness of samples. • The diamond core was cut longitudinally using a core saw on HQ diameters, to sample half core; NQ diameters were sampled full core. • Core samples were collected by a Company Geologist and sent off to the laboratory for assay. • Core samples were crushed and pulverized at the ALS laboratory in Okahandja before being shipped to Johannesburg for assay. • Drilling samples were assayed using methods Au-AA24 for gold. • The sample preparation procedures carried out are considered acceptable. Blanks and standards (CRM) are used to monitor Quality Control and representativeness of samples.
<p>Quality of assay data and laboratory tests</p>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • RC samples and core samples were assayed by 50g Lead collection fire assay in new pots and analysed by Atomic Absorption Spectroscopy (AAS) for gold. • Industry best practice procedures were followed and included submitting blanks, field duplicates and Certified Reference Material. Acceptable levels of accuracy and precision have been confirmed.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> At this stage, the intersections have been verified by the Company Geologists. All field data is manually collected, entered into excel spreadsheets, validated and loaded into a database. Electronic data is stored on a cloud server and routinely backed up. Data is exported from the database for processing in a number of software packages.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drill holes collar locations were recorded at the completion of each hole by hand-held GPS. Coordinates collected are in the WGS84 Zone 33S grid system
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> The data spacing and distribution of sampling is sufficient to establish the degree of geological and grade continuity appropriate for Mineral Resource estimation procedures. Drill holes were planned on localised set grids with spacing varying between 25m and 100m; depending on the sections. The grade control trial grid was set at a 6m x 10m grid.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Drill holes were positioned using geological information collected from the trenches and from the detailed mapping completed over the prospect. They are positioned perpendicular to the main schistosity and so to the inferred mineralisation main controls.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Sampling is supervised by Wia geologists and all samples are bagged and sealed on site prior to delivery to the laboratory in Okahandja by company staff. No other personnel are permitted un-supervised access to the samples prior to delivery to ALS.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> No reviews or audits have been conducted on the drilling reported in this announcement.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, 	<ul style="list-style-type: none"> The Damaran Project comprises 11 exclusive prospecting licenses (EPLs 6226, 4833, 8039, 7246, 4818, 4953, 6534, 6535, 8249, 7980, 8709) and located in central Namibia. EPL6226 is 100% held by Wia Gold in the

Criteria	JORC Code explanation	Commentary
	<p><i>native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <ul style="list-style-type: none"> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<p>name of Aloe Investments One Hundred and Ninety Two (Pty) Ltd. EPL4833, 4818, 7246, 8039 and 8249 are held under an 80% earn-in and joint venture agreement with Epangelo Mining Limited, a private mining investment company with the Government of the Republic of Namibia as the sole shareholder.</p> <ul style="list-style-type: none"> EPL6534, 6535, and 4953 are held under a company called Gazina Investments which is owned 90% by Wia and 10% by the vendor. EPL7980 is 100% held by WiaGold in the name of Damaran Exploration Namibia (PTY) Ltd
Exploration done by other parties	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> Work completed prior to WiaGold includes stream sediment sampling, mapping, soil and rock chip sampling by Teck Cominco Namibia but data is unavailable. This work did not cover the Okombahe permit (EPL4818), host of the Kokoseb deposit.
Geology	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> The Kokoseb Gold Project lies within the Northern Central Zone of the Pan-African Damaran Orogenic Belt. The project area is underlain by neo-Proterozoic metasediments, including the Kuiseb schist formation, host of Kokoseb, Twin Hills and Ondundu gold deposits in Namibia. Known gold deposits, including Kokoseb, are orogenic type deposits by nature. Kokoseb gold mineralisation is hosted by the Kuiseb schist formation, biotite-schists (metasediments) which have been intruded by several granitic phases. The gold mineralised zone appears as a contact like aureole around a central granitic pluton, with a diameter of approximately 3km in each direction. Gold mineralisation is present as native gold grains and lesser silver bearing gold grains that are spatially associated with sulphides dominated by pyrrhotite, löllingite and arsenopyrite. Gold grains have developed at the contact between löllingite and arsenopyrite following a retrograde reaction.
Drill hole Information	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is</i> 	<ul style="list-style-type: none"> see tables in the appendix.

Criteria	JORC Code explanation	Commentary
	<p><i>justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	
Data aggregation methods	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> • Reported intercepts are calculated using weighted average at a cut-off grade of 0.5 g/t Au and allowing internal dilution of maximum 2m consecutive low-grade material.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> • Drill holes are inclined at around 55 to 60 degrees, with azimuths generally perpendicular to local mineralisation trends, implying a true thickness around half the down-hole intercept lengths. • Intercepts are reported as they appear from the sampling.
Diagrams	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • Plan view maps of all drillhole are included.
Balanced reporting	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • All samples with assays have been reported.
Other substantive exploration data	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock</i> 	<ul style="list-style-type: none"> • No other exploration data is being reported at this time.

Criteria	JORC Code explanation	Commentary
	<p><i>characteristics; potential deleterious or contaminating substances.</i></p>	
<p>Further work</p>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • Refer to the text in the announcement for information on follow-up and/or next work programs.