



INFILL DRILLING INTERSECTS SHALLOW, HIGH-GRADE SILVER-LEAD SULPHIDE MINERALISATION 250 METRES NORTH OF THE STARTER ZONE

Maronan Metals Limited (ASX:MMA) (**Maronan** or the **Company**) is pleased to announce that infill drilling north of the Starter Zone has intersected shallow high-grade silver-lead mineralisation. These new results are within 120m of Maronan's fully permitted exploration decline and around 250m north of the starter zone.

With a third drill rig scheduled to arrive on site in August, the fast-tracked 40,000 metre surface infill drilling program to feed into the prefeasibility work program is progressing well, with further regular news flow expected to the end of the year.

HIGHLIGHTS

EASTERN HORIZON:

- **MRN26002**
 - **7.3 metres (6.2m estimated true width [etw]) at 11.0% lead and 89g/t silver from 345.7m, including**
 - **4.3m (3.7m etw) at 15.8% lead and 118g/t silver from 345.7m**
- **MRN26003**
 - 14.2 metres (12.1m etw) at 3.5% lead, 40g/t silver from 251m, including
 - 3.25m (2.8m etw) at 5.7% lead, 46g/t silver from 254.75m

WESTERN HORIZON:

- **MRN26002**
 - **4.05 metres (3.4m etw) at 10.2% lead, 123g/t silver from 273.7m; and**
 - 5.5 metres (4.7m etw) at 6.6% lead, 97g/t silver from 299m, including
 - **2.6m (2.2m etw) metres at 13.0% lead, 141g/t silver from 299m**
 - **MRN26003**
 - 0.5 metres (0.4m etw) at 7.2% lead, 76g/t silver from 144.5m; and
 - 1.25 meters (1.1m etw) at 5.6% lead, 61g/t silver from 183.3m
-

Maronan's Managing Director, Mr Richard Carlton, commented:

"We are thrilled to have intersected shallow high-grade silver-lead mineralisation north of the Starter Zone, the focus of last September's [Preliminary Economic Assessment](#) (Scoping Study) (ASX: MMA, 23 September 2025). The intercepts in MRN26002 and MRN26003 are located within just 120m of our permitted exploration decline and will be followed up with further infill drilling as the program progresses.

With two drill rigs spinning, more than 7,000m of drilling already completed, and a third drill rig scheduled to commence in August, shareholders can anticipate regular news flows in the months ahead."

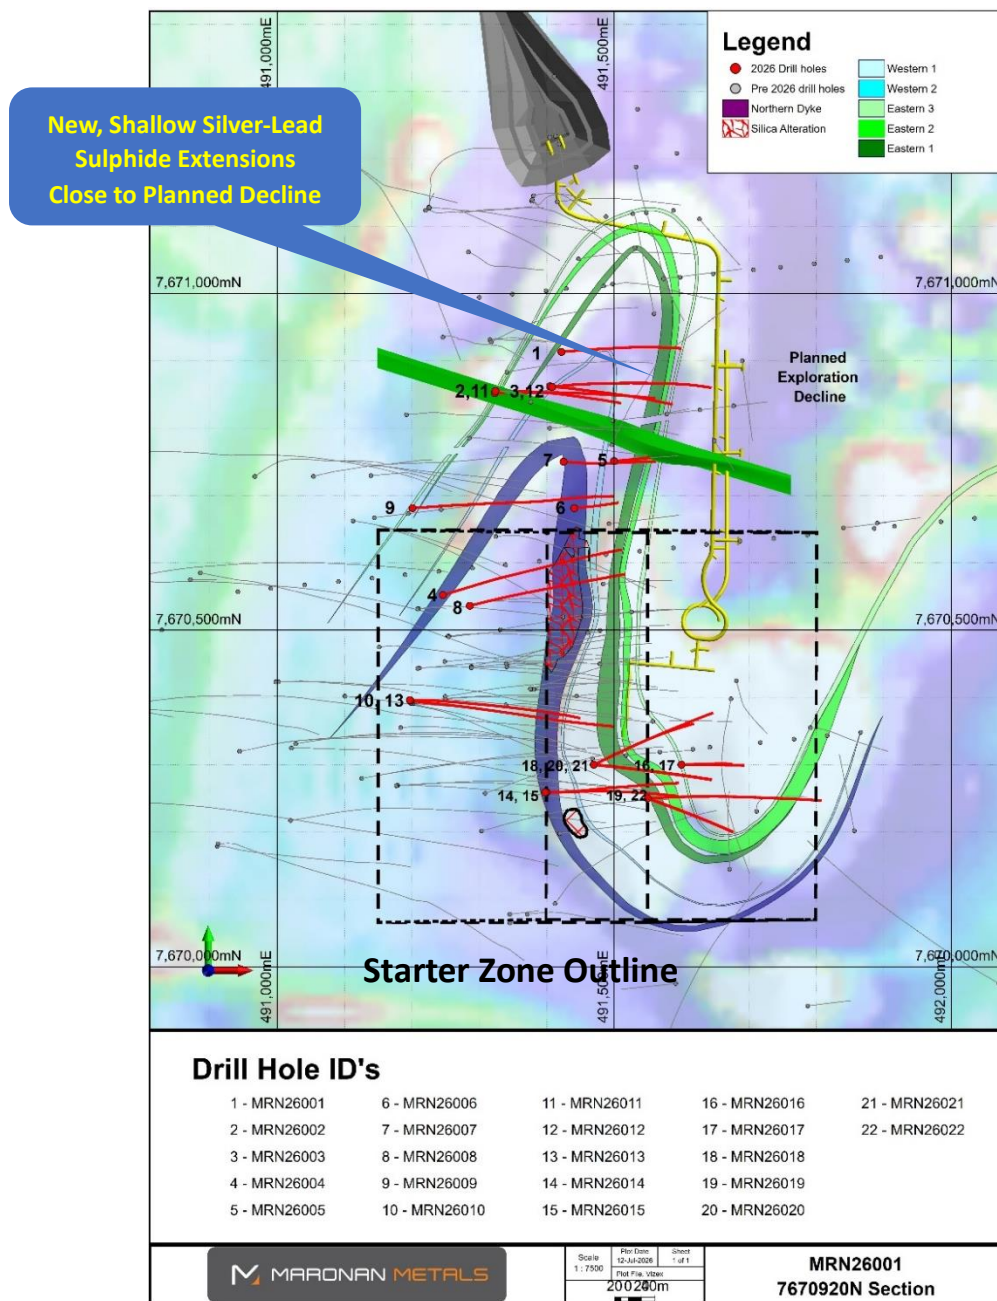


Figure 1: Plan view showing location of 2026 exploration and geotechnical drill holes completed at the Maronan Project

Summary of Results

This announcement provides assay results for drill holes MRN26001, MRN26002, MRN26003, MRN26005 and MRN26006 targeting shallow silver-lead mineralisation north of the Starter Zone (Figure 1). Significant intercepts for the drill holes are discussed below and summarised in Table 2. All assays for the reported holes are included in Appendix 2 of this report. Cross sectional interpretations are presented in Figures 2 – 5.

MRN26001

MRN26001 was drilled towards the boundary between the silver-lead and gold-only mineralisation towards the northern end of the deposit (Figures 1 and 2). Several zones of gold-only and narrow zones of silver-lead mineralisation were intersected including:

Gold Only

- 0.5 metres (0.4m etw) at 1.05g/t gold from 45.95m;
- 1.0 metres (0.9m etw) at 1.20g/t gold from 189m;
- 1.76 metres (1.5m etw) at 1.06g/t gold from 260.24m;
- 8.24 metres (7.0m etw) at 0.74g/t gold from 275.76m; and
- **6.0 metres (5.1m etw) at 1.24g/t gold from 294m**

Eastern Horizon

- 1.57 metres (1.3m etw) at 5.0% lead, 72 g/t silver from 257.23m; and
- 0.4 metres (0.4m etw) at 3.9% lead, 72g/t silver from 306.38m

MRN26002

MRN26002 intersected several zones of high-grade silver-lead sulphide mineralisation within the Western Horizon. This lead-rich sulphide mineralisation was not expected north of the Northern Dyke and will be a target for further follow up drilling. For the Eastern Horizon, a thick interval of banded carbonate facies sulphide mineralisation was intersected at the target depth. Better silver-lead mineralisation included:

Western Horizon

- 2.9 metres (2.5m etw) at 4.2% lead, 39g/t silver from 254.1m;
- 0.6 metres (0.5m etw) at 5.0% lead, 30g/t silver from 260.4m;
- **4.05 metres (3.4m etw) at 10.2% lead, 123g/t silver from 273.7m;**
- 0.56 metres (0.5m etw) at 8.5% lead, 84g/t silver from 283.0m; and
- **5.5 metres (4.7m etw) at 6.6% lead, 97g/t silver from 299m, including**
 - **2.6 metres at 13.0% lead and 141g/t silver from 299m**

Eastern Horizon

- **7.3 metres (6.2m etw) at 11.0% lead, 89g/t silver from 345.7m, including**
 - **4.3 metres at 15.8% lead, 118g/t silver from 345.7m;**
- 1 metre (0.9m etw) at 3.2% lead, 72g/t silver from 358m;
- 2.4 metres (2.0m etw) at 2.8% lead, 48g/t silver from 365.2m;
- 0.7 metres (0.6m etw) at 5.0% lead, 99g/t silver from 378.0m; and
- 0.65 metres (0.6m etw) at 3.7% lead, 73g/t silver from 382m

MRN26003

MRN26003, drilled 90m up dip of MRN26002 (Figure 1), intersected broad zones of silver-lead sulphide mineralisation on the Eastern Horizon (Figure 3). The narrower Western Horizon intercept is related to

folding that can be observed in the drill core. A thick interval of banded carbonate facies silver-lead sulphide mineralisation was intersected on the Eastern Horizon. Significant intercepts include:

Western Horizon

- 0.5 metres (0.4m etw) at 7.2% lead, 76g/t silver from 144.5m; and
- 1.25 metres (1.1m etw) at 5.6% lead, 61g/t silver from 183.3m

Eastern Horizon

- **14.2 metres (12.1m etw) at 3.5% lead, 40g/t silver from 251m, including**
 - 2.4 metres (2.0m etw) at 4.3% lead and 72g/t silver from 251m; and
 - 3.25 metres (2.8m etw) at 5.7% lead, 46g/t silver from 254.75m

MRN26005

MRN26005 was designed to test for Eastern Horizon silver-lead mineralisation north of the Starter Zone (Figure 1). The drill hole unexpectedly intersected a post-mineral dyke (running sub-parallel to the drilling orientation) and did not intersect the main Eastern Horizon target.

The hole intersected oxide Silver-Lead mineralisation on the Western Horizon (Figure 4) and some core loss was experienced through this zone despite using triple tube drilling. **Oxide silver-lead mineralisation is not currently considered recoverable and is not included in the current Maronan Resources.** Drilling also extended the Copper-Gold mineralisation further north beyond the extremity of the Starter Zone.

Western Horizon (Oxide Ore)

- 14 metres (11.9m etw) at 7.9% lead, 36g/t silver from 48m (oxide and includes 0.2m coreless), including
 - 3.5 metres (3.0m etw) grading 11.8% lead, 119g/t silver from 52.5m (including 0.1m coreless)
- 2.0 metres (1.7m etw) at 5.0% lead, 4g/t silver from 77m (oxide)

Copper-Gold Zone

- **6 metres (5.1m etw) at 0.31% Cu, 0.67g/t gold from 65m**

MRN26006

MRN26006 failed to intersect the main Eastern Horizon target due to bogged rods and will be re-drilled. MRN26006 intersected the oxidised upper portion of the Western Horizon (Figure 1 and Figure 5). Due to the oxidised nature of the core – some coreloss was experienced through this section despite drilling triple tube. **Oxide silver-lead mineralisation is not currently considered recoverable and is not included in the current Maronan Resources.**

MRN26006 failed to test the copper-gold and eastern horizon targets. A redrill is planned to commence shortly.

Western Horizon (Oxide Ore)

- 5.98 metres (5.1m etw) at 7.9% lead, 4 g/t silver from 94.5m (includes 1.8m core less);
- 1.4 metres (1.2m etw) at 7.2% lead, 9g/t silver from 104.6m; and
- 3.0 metres (2.6m etw) at 5.8% lead, 2g/t silver from 108m (includes 0.4m core loss)

Gold

1.3 metres (1.1m etw) at 4.74g/t gold from 116.7m – Supergene gold mineralisation at the base of the Western horizon.

Table 1. Summary of 2026 Drill Holes completed at the Maronan Project

SITE_ID	SITE_TYPE	EASTING	NORTHING	HEIGHT	SITE_STATUS	END_DEPTH	AZIMUTH	DIP	STATUS	COMMENTS
MRN26001	DD	491422	7670913	210.9	Comp	327.6	084	-60	This report	
MRN26002	DD	491323	7670852	211.5	Comp	429.6	090	-60	This report	
MRN26003	DD	491405	7670862	211.3	Comp	324.6	095	-60	This report	
MRN26004	DD	491246	7670552	212.3	Comp	480	074	-60	Awaiting Assays	
MRN26005	DD	491500	7670751	211.1	Comp	195.7	086	-60	This report	Hit dyke. Ended early
MRN26006	DD	491441	7670681	211.7	Aban	163	086	-65	This report	Abandoned due to bogged tube
MRN26007	DD	491425	7670750	211.6	Comp	279.3	095	-60	Awaiting Assays	
MRN26008	DD	491286	7670536	212.3	Comp	399	076	-58	Awaiting Assays	
MRN26009	DD	491201	7670681	212	Comp	530	085	-60	Awaiting Assays	
MRN26010	DD	491198	7670395	212.4	Comp	594.1	097	-65	Awaiting Assays	
MRN26011	DD	491324	7670855	211.5	Comp	459.3	090	-70	Awaiting Assays	
MRN26012	DD	491408	7670861	211.3	Comp	500	081	-66	Awaiting Assays	
MRN26013	DD	491197	7670396	212.4	Comp	630	092	-70	Awaiting Assays	
MRN26014	DD	491400	7670259	211.1	Comp	360	089	-56	Awaiting Assays	
MRN26015	DD	491398	7670259	211.1	Comp	414	090	-64	Awaiting Assays	
MRN26016	DD	491600	7670300	208.2	Comp	186.4	089	-60	Awaiting Assays	
MRN26017	DD	491600	7670300	208.2	Comp	243.3	090	-73	Logging	
MRN26018	DD	491470	7670300	208.9	Comp	346.9	066	-56	Logging	
MRN26019	DD	491550	7670250	210.3	Comp	459.4	085	-60	Logging	
MRN26020	DD	491470	7670300	208.9	Comp	360	065	-65	Logging	
MRN26021	DD	491470	7670300	208.9	Comp	292.9	095	-56	Logging	

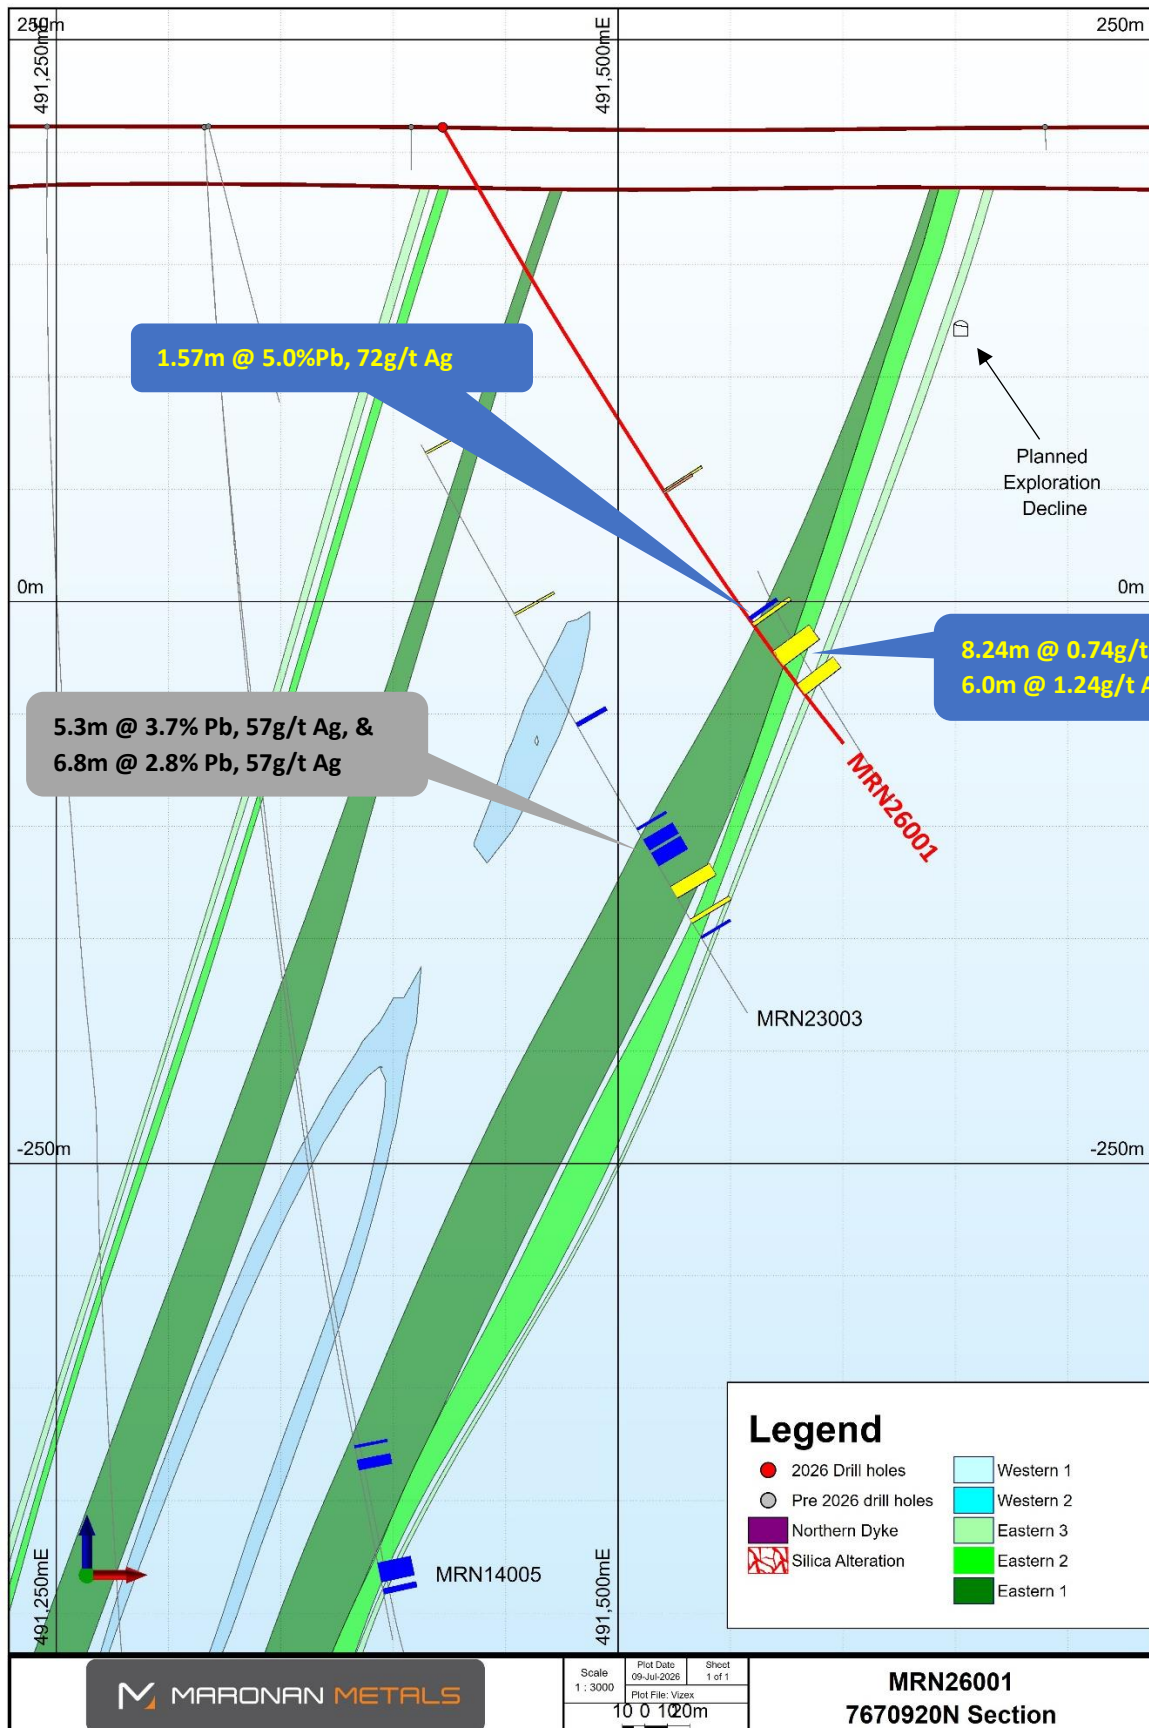


Figure 2. Cross section (7670920N) showing significant results from MRN26001

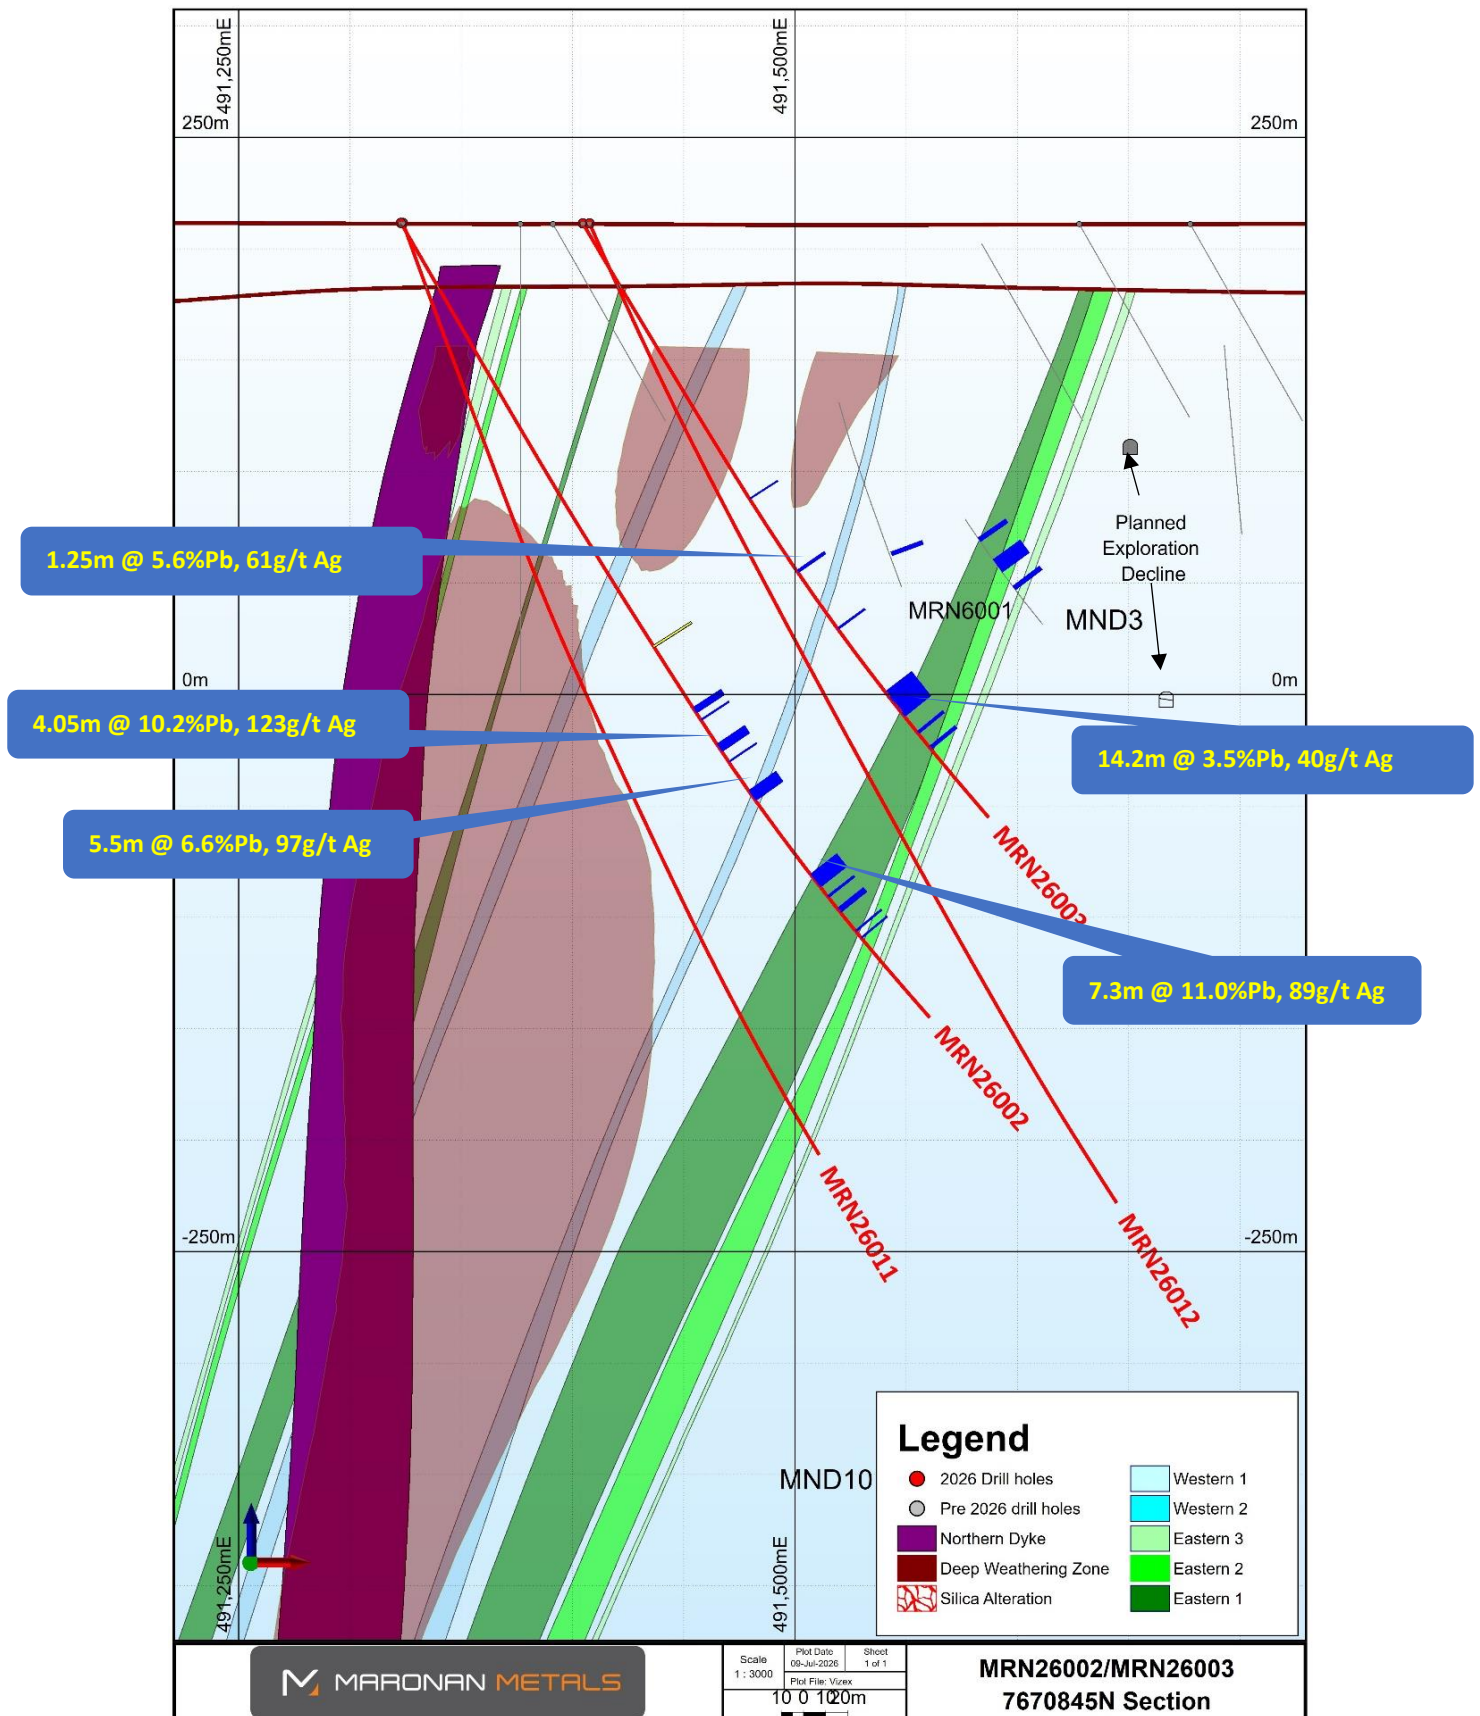


Figure 3. Cross section (7670845N) showing significant results from MRN26002 and MRN26003

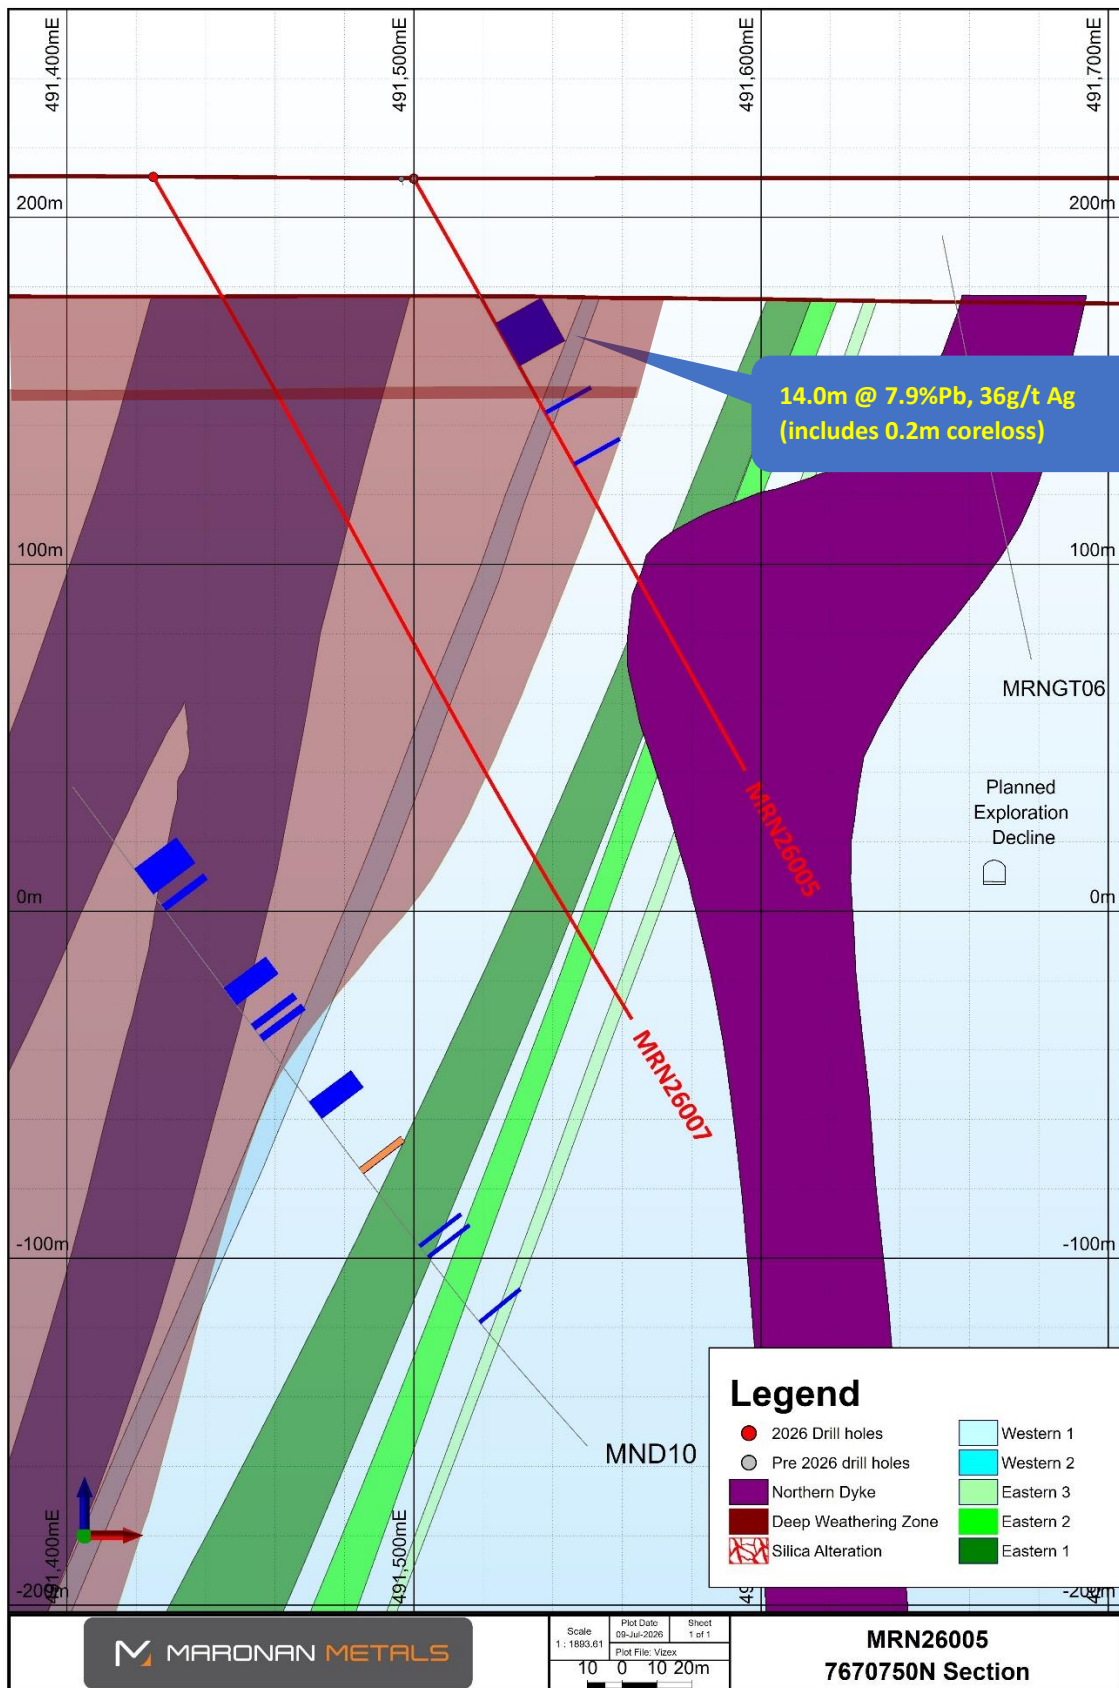


Figure 4. Cross section (7670750N) showing significant results from MRN26005

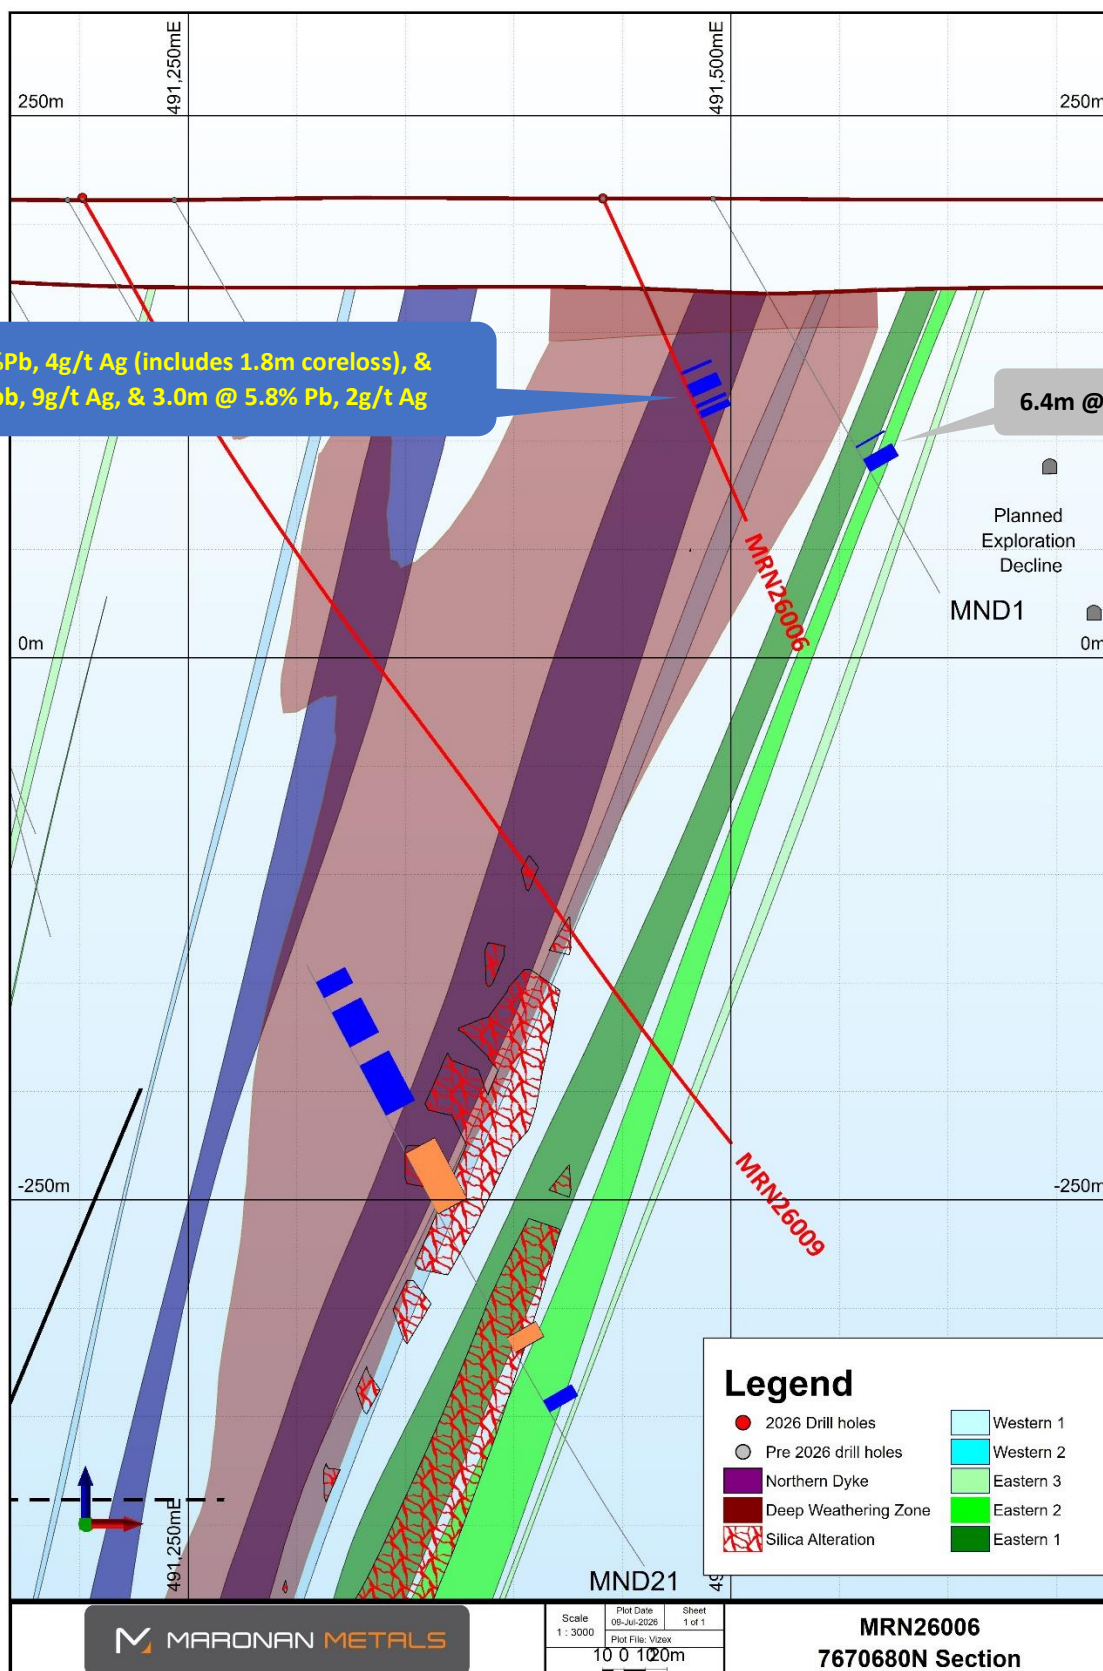


Figure 5. Cross section (7670680N) showing significant results from MRN26006. MRN26006 failed to reach target depth (eastern horizon) due to drilling issues and will be re-drilled

Table 2. Summary of exploration assay results from MRN26001, MRN26002, MRN26003, MRN26005, MRN26006 using a lower cut-off grade of 1 weight percentage for lead, and 0.3 weight percentage for copper. Full assay results are included in appendix 2 of this report.

Hole Number	From (m)	To (m)	Down-hole Intercept (m)	Estimated True Width (m)	Lead (wt%)	Silver (g/t)	Zinc (wt%)	Copper (wt%)	Gold (g/t)	Mineralised Horizons
MRN26001	189	190	1	0.9					1.2	Gold Only Domain
MRN26001	257.23	258.8	1.57	1.3	5.0	72				Eastern Horizon
MRN26001	260.24	262	1.76	1.5					1.06	Gold Only Domain
MRN26001	275.76	284	8.24	7.0					0.74	Gold Only Domain
MRN26001	294	300	6	5.1					1.24	Gold Only Domain
MRN26002	221	222	1	0.9					1.16	Gold Only Domain
MRN26002	254.1	257	2.9	2.5	4.2	39				Western Horizon
MRN26002	260.4	261	0.6	0.5	5.0	30				Western Horizon
MRN26002	273.7	277.75	4.05	3.4	10.2	123				Western Horizon
MRN26002	283	283.56	0.56	0.5	8.5	84				Western Horizon
MRN26002	299	304.5	5.5	4.7	6.6	97				Western Horizon
Includes	299	301.6	2.6	2.2	13.0	141				Western Horizon
MRN26002	345.7	353	7.3	6.2	11.0	89				Eastern Horizon
Includes	345.7	350	4.3	3.7	15.8	118				Eastern Horizon
MRN26002	358	359	1	0.9	3.2	72				Eastern Horizon
MRN26002	365.2	367.6	2.4	2.0	2.8	48				Eastern Horizon
MRN26002	378	378.7	0.7	0.6	5.0	99				Eastern Horizon
MRN26002	382	382.65	0.65	0.6	3.7	73				Eastern Horizon
MRN26003	144.5	145	0.5	0.4	7.2	76			0.7	Western Horizon
MRN26003	183.3	184.55	1.25	1.1	5.6	61				Western Horizon

Hole Number	From (m)	To (m)	Down-hole Intercept (m)	Estimated True Width (m)	Lead (wt%)	Silver (g/t)	Zinc (wt%)	Copper (wt%)	Gold (g/t)	Mineralised Horizons
MRN26003	215	215.84	0.84	0.7	5.6	36			0.7	Western Horizon
MRN26003	251	265.2	14.2	12.1	3.5	40				Eastern Horizon
includes	251	253.4	2.4	2.0	4.3	71				Eastern Horizon
Includes	254.75	258	3.25	2.8	5.7	46				Eastern Horizon
MRN26003	274	275.25	1.25	1.1	3.3	70			0.25	Eastern Horizon
MRN26003	282.7	284.24	1.54	1.3	3.2	64				Eastern Horizon
MRN26005	48	62	14	11.9	7.9	36			0.14	Western Horizon – Oxide, includes 0.2m coreloss. Not currently recoverable
includes	52.5	56	3.5	3.0	11.8	119			0.39	Western Horizon – Oxide, includes 0.1m coreloss. Not currently recoverable
MRN26005	65	71	6	5.1	0.3	16		0.31	0.67	Copper overprinting West Horizon (leached copper)
Includes	70	71	1	0.9					1.71	Supergene gold
MRN26005	77	78	1	0.9	5.0	4				Western Horizon – Oxide. Not currently recoverable
MRN26005	94	95	1	0.9	4.5	4				Western Horizon – Oxide. Not currently recoverable
MRN26006	88	89.1	1.1	0.9	3.4	2				Western Horizon – Oxide. Not currently recoverable
MRN26006	94.5	100.48	5.98	5.1	7.9	4				Western Horizon – Oxide, 1.1m coreloss. Not currently recoverable
MRN26006	104.6	106	1.4	1.2	7.2	9				Western Horizon – Oxide, 0.4m coreloss occurs above intercept

Hole Number	From (m)	To (m)	Down-hole Intercept (m)	Estimated True Width (m)	Lead (wt%)	Silver (g/t)	Zinc (wt%)	Copper (wt%)	Gold (g/t)	Mineralised Horizons
MRN26006	108	111	3	2.6	5.8	2				Western Horizon – Oxide, includes 0.4m coreloss. Not currently recoverable
MRN26006	114	115	1	0.9	4.4	4				Western Horizon – Oxide. Not currently recoverable
MRN26006	116.7	118	1.3	1.1					4.74	At base of western horizon. Supergene gold mineralisation

This announcement was authorised by the Board of Maronan Metals Limited.

For further information on the Company, please visit: maronanmetals.com.au

CONTACT

Richard Carlton

Managing Director

+61 402 298 029

richard.carlton@maronanmetals.com.au

Ian Gebbie

Company Secretary

+61 431 272 148

ian.gebbie@maronanmetals.com.au

Maronan Metals Limited (ASX:MMA) is an Australian mineral explorer focused on realising the growth potential of the advanced Maronan copper-gold and silver-lead deposit in the Cloncurry region of northwest Queensland - one of Australia's most productive mineral provinces.



COMPETENT PERSONS STATEMENT

The information in this announcement relates to Exploration Results and is based on and fairly represents information and supporting documentation prepared by Mr Andrew Barker. Mr Barker is the Exploration Manager for Maronan Metals, and is a full time employee of Maronan Metals. Mr Barker is a member (#6299) of the Australian Institute of Geoscientists (AIG). Mr Barker has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" (the JORC Code). Mr Barker consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information related to Maronan Metals Mineral Resources is extracted from the report entitled "Updated Mineral Resource Estimate – Amended" created on 6 June 2025 and is available on the company website (www.maronanmetals.com.au). The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The company confirms that the form and context in which the competent person's findings are presented have not been materially modified from the original market announcement.

The information related to Maronan Metals Preliminary Economic Assessment (Scoping Study) is extracted from the report entitled "Maronan Starter Zone Preliminary Economic Assessment" created on 23 September 2025 and is available on the company website (www.maronanmetals.com.au). The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, that all material assumptions and technical parameters underpinning the Scoping Study in the relevant market announcement continue to apply and have not materially changed. The company confirms that the form and context in which the competent person's findings are presented have not been materially modified from the original market announcement.

APPENDIX 1. JORC CODE, 2012 EDITION – TABLE 1 REPORT TEMPLATE

1.1 Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representativity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	- Results in this report are from half core samples of diamond drill core. All samples reported in this release are half core samples. Full assay results for Au, Ag, Cu, Pb and Zn are included in appendix 2. - Core has been cut longitudinally using an automatic corewise core saw. - Samples have been submitted for assay analysis with ALS Global. - Samples for holes MRN26001, MRN26002, MRN26003, MRN26005 and MRN26006 were prepared at the Mt Isa Laboratory. - Samples are crushed and pulverized to 85% passing 75um. Samples are then assayed using the Au-AA25 (30g fire assay) completed at ALS Townsville and ME-MS61 assay methods (48 element ICP-MS suite) completed at ALS Brisbane or ALS Perth. For samples that return over-limit assays from the ME-MS61 assays, samples are re-assayed using the OG62 method. - Maronan Metals has included certified reference materials and blank samples to monitor laboratory performance at a rate of approximately 1:25 samples. In addition to this, ALS has also included addition reference materials and blank materials to monitor the performance of the laboratory.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	- All drilling for the 2026 drill program at Maronan was Diamond Drilling - MRN26001 – Diamond Drilling. PQ3: 0 – 23.5m; HQ3: 23.5 – 179.5m; NQ2: 179.5 – 327.6m - MRN26002 - Diamond Drilling. PQ3: 0 – 27.4m; HQ3: 27.4 – 230.5m; NQ2: 230.5 – 429.6m - MRN26003 - Diamond Drilling. PQ3: 0 – 26.9m; HQ3: 26.9 – 119.6m; NQ2: 119.6 – 324.6m - MRN26005 - Diamond Drilling. PQ3: 0 – 44.6m; HQ3: 44.6 – 195.7m; - MRN26006 - Diamond Drilling. PQ3: 0 – 62.5m; HQ3: 62.5 – 163m - HQ and NQ drill core was oriented using the Reflex ACT3 digital

Criteria	JORC Code explanation	Commentary
		orientation tool
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- Drill core recovery is recorded for each drilling run. The length of the run and the length of recovered drill core is recorded on core blocks completed for each core run. This is converted into a recovery percentage per drill run during drill core logging. - Where poor ground is expected – triple tube drilling techniques are used to maximise drill core recovery. - Overall – drill recoveries are very good. There is some core loss drilling through the transported cover sequence and through a zone of broken ground and deep weathering associated with the copper-gold mineralisation. Core loss was recorded in MRN26005 and MRN26006 through the oxidised western horizon silver-lead mineralisation. Core loss intervals are noted in the disclosure. - It is not known at this point in time whether there is a relationship between sample recovery and grade for material within the copper gold zone, or whether sample bias has occurred due to preferential loss or gain of material. - Sample recovery is not considered to be an issue for the fresh silver-lead mineralisation.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	- Drill core has been logged for lithology, alteration and mineralisation and geotechnical RQD has been recorded. Specific Gravity measurements have been taken using the Archimedes Method (Dry Weight/(Dry Weight – Wet Weight)). Magnetic Susceptibility reading have been collected using a K10 Magnetic Susceptibility machine at 1m intervals downhole - Logging of lithology and alteration is qualitative. Logging of sulphide mineralisation considered to be semi-quantitative in nature. - All drill core has been photographed. - The total length (100%) of recovered drill core for each drill hole has been logged.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique.	- Drill core was cut in half using an automatic core saw. Drill core was cut slightly off the orientation line, with sampling of the half core that did not have the orientation line. - The sampling method utilized is considered appropriate for the styles of mineralisation at the Maronan project. - Certified Standards were inserted at a rate of 1:25 samples. Two

Criteria	JORC Code explanation	Commentary
	- Quality control procedures adopted for all sub-sampling stages to maximise representativity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	different sets of standards are utilized, one for the lead, silver, zinc mineralisation (OREAS 135B; OREAS 136; OREAS 315; OREAS 317) and one for the copper, gold mineralisation (OREAS 520; OREAS 521; OREAS 522; OREAS 523; OREAS 601C). - Blanks were inserted at a rate of 1:25 samples. Additional blanks were used in the copper zone if native copper was observed - Additional Quartz Flushes are used to clean bowls following high grade samples - No duplicate second-half drill core samples have been submitted. - No specific grain size analysis has been completed on the Maronan project, however sampling methods utilized are consistent with those used by other mining and exploration projects targeting similar styles of mineralisation in the Mt Isa Belt.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	- Samples were assayed by Au-AA25 (30g fire assay) technique for gold and the ME-MS61 method for Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn and Zr. For over limit samples of Ag, Cu, Pb, Zn, P and Mn samples are assayed by the ore grade OG-62 method. ME-MS61 is considered a "near total" digest method, with only the most resistive minerals (e.g. Zircons) only partly dissolved. Au-AA25 is considered a total assay method for gold. - The methods of assaying utilized are considered appropriate for the style of mineralisation targeted - Standard and Blank samples were inserted at a rate of 1:25 samples each. - The standards used displayed acceptable levels of accuracy and precision. Any QAQC failures are recorded in Maronan Metals QAQC action register and follow up actions are recorded. - No duplicates at the sampling stage were submitted. - The standards used displayed acceptable levels of accuracy and precision.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	- Assay results reported in this release have been compiled by Exploration Manager Andrew Barker and Senior Geologist Carlos Duran - Logging is completed by Maronan Metals and contract geologists and is reviewed by Maronan Metals exploration manager.

Criteria	JORC Code explanation	Commentary
	Discuss any adjustment to assay data.	- A limited number of twinned drill holes have been completed including; MRN24003 and MRN24003W1 (reported on 25/9/2024) can be considered a set of twinned holes, that show good agreement between holes. MRN 24003/MRN24003W1 have a separation of around 3m within the silver-lead mineralisation - Logging is saved into a logging template excel spreadsheet. Upon completion of logging, this data is uploaded into Maronan Metals Geobank Database. The Geobank Database is housed on an SQL server. A copy of the logging spreadsheet is saved on the Maronan Metals server. - Assays results are loaded into Maronan Metals Geobank Database. QAQC is checked on import, and issues identified are recorded in Maronan's QAQC register. - No adjustments are made to the raw assay data reported from the laboratory.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- All drill collars for the 2026 program at Maronan have been picked with a garmin GPS and are accurate to +/- 3m. Detailed RTK-GPS pickup will be completed by a licensed surveyor prior to completing a resource update. - Topographic relief has been surveyed with a lidar survey completed of the project area with a vertical accuracy of +/- 4cm. - Downhole surveys are completed with an axis north seeking gyroscope.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	- Data spacing across the project is variable from approximately 200m x 200m to as close as 30m x 30m within some areas of the Starter Zone. Drilling in the area of the results reported in this report is around 100m x 100m spacing. - In areas of more closely spaced drilling (~ 50 x 50m or closer), geological and grade continuity is sufficient to classify indicated confidence resource. Where drill spacing is wider, resource confidence is inferred. Maronan's most recent Mineral Resources were reported in 6/6/2025 to the ASX. - The drill pierce point spacing is sufficient to outline the structural geometry, broad extent of mineralisation and grade variations in the mineral system and is of sufficient spacing and distribution to infer a Mineral Resource.


Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- No sample compositing has been applied in this report. - Silver-Lead mineralisation at the Maronan Project is hosted within a folded sequence of metamorphosed sedimentary rocks. The majority of mineralisation occurs on the short limb position striking roughly north-south and dipping between 60 – 70 degrees to the west. The average plunge of the fold axis' at the Maronan project is around 70 degrees toward 285. Drill holes drilled moderately steeply (-55 to -70 degrees) towards the west intersect the mineralisation in the least biased orientation. - For the Copper-Gold mineralisation – the trend of the mineralisation sits within a plane dipping 70 degrees to the west. There is a plunge component to the copper gold orientation with mineralisation plunging around 66 degrees toward 320 (moderately steep north). - The units hosting the Maronan Deposit are folded. Drilling is planned to test orthogonal to mineralisation as best of possible, but local folding may introduce sample bias. This can be identified due to bedding angles in the drill core. - Estimated true widths have been estimated for the drillholes discussed in this release. - The estimated true width for intercepts are: - MRN26001 – 85% - MRN26002 – 85% - MRN26003 – 85% - MRN26005 – 85% - MRN26006 is 85%
Sample security	The measures taken to ensure sample security.	- Drill core is kept at the drill rig which is manned 24/7 until it is collected by Maronan Metals personnel. Maronan Metals personnel transport the drill core to Maronan Metals yard in Cloncurry. The yard in Cloncurry is secured by a six foot fence and gates are locked at all times when no personnel are at the yard. - Samples are either collected from the Maronan Metals yard by couriers and transported to ALS Mt Isa, or delivered to ALS Mount Isa by Maronan Metals personnel. - Samples are transported in sealed bulka bags. - Upon receipt at the lab, the dispatch is checked and a sample receipt sent to Maronan Metals confirming the dispatch details.

Criteria	JORC Code explanation	Commentary
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	- Maronan Metals completed an inspection of ALS Mt Isa Sample preparation facility in Mt Isa in April 2022 and had no adverse findings. - A selection of historic pulps from drilling completed by Red Metal between 2011 – 2014 were submitted to ALS Mt Isa for check assaying utilising the same assay protocol as the current Maronan Metal program. Results from this program display a very strong correlation between the original Red Metal assays and the Maronan Metal check assays.

1.2 Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- Maronan is located within MDL 2028 which was granted on 27 February 2026. MMA also retains blocks of EPM13368 not covered by MDL2028. The tenements which comprise the Maronan Project, are situated in the Cloncurry region of north-west Queensland. Both tenements are owned 100% by Maronan Metals Limited. No material ownership issues or agreements exist over the tenement. Ancillary exploration access agreements have been established with the native title claimants, and a standard landholder conduct and compensation agreement has been established with the pastoral lease holders. - The tenements are in good standing and no known impediments exist. EPM13368 is currently under renewal – which is expected to be granted shortly.

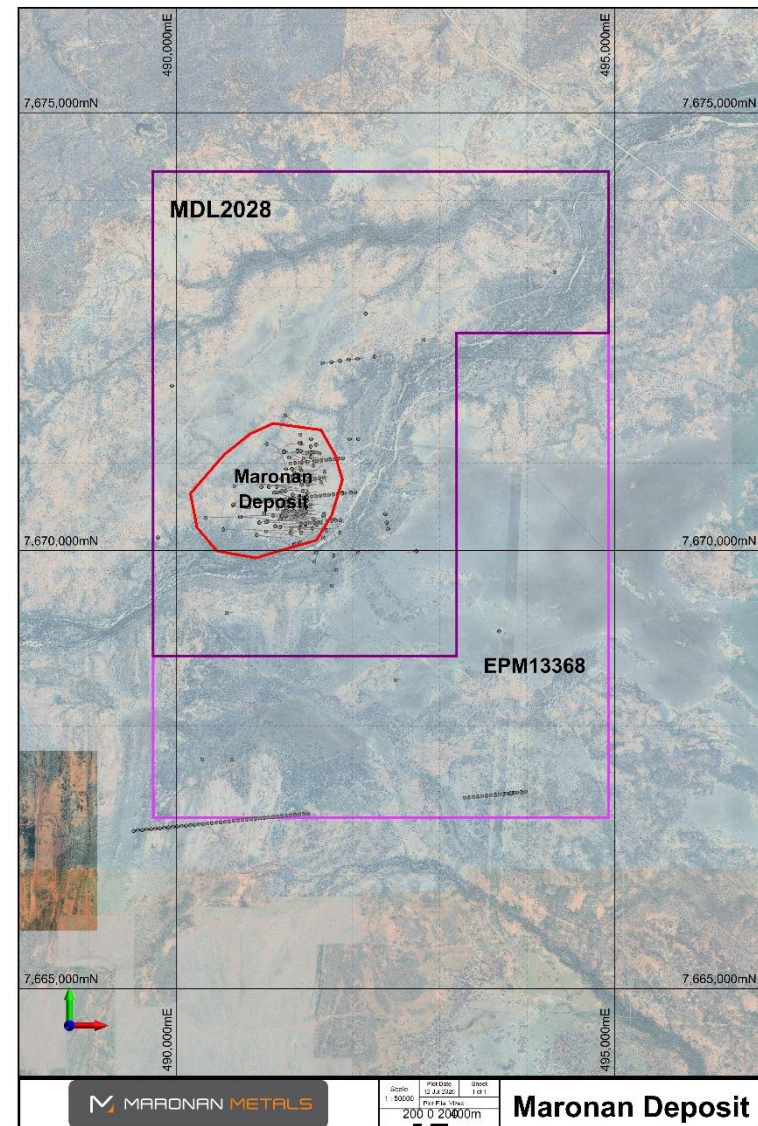

Criteria	JORC Code explanation	Commentary
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	The extent of mineralisation at Maronan has been defined by 136 diamond core drill holes drilled by five different companies since 1987 until the present. Shell Minerals/Billiton/Acacia discovered base metal mineralisation on the project in 1987 and completed 16 shallow holes to 1993. From 1995 to 1996 MPI completed 3 holes into the northern and southern fold hinge structures. From 2001 to 2004 Phelps Dodge completed 6 holes. BHP Cannington undertook a campaign of lead-silver exploration from 2006 to 2008 completing 13 holes. Red Metal Limited completed 16 holes from 2011 to the 2019 seeking depth extensions to the bedded lead-silver and separate copper-gold mineralisation. Maronan Metals was spun out of Red Metals in 2022 and has continued progressing exploration efforts on EPM13368.
Geology	Deposit type, geological setting and style of mineralisation.	- Exploration on Maronan has identified three separate styles of mineralisation, bedded lead-silver mineralisation partially overprinted by structurally controlled, copper-gold mineralisation, and gold only mineralisation. - The lead-silver mineralisation is of a similar style to the nearby Cannington deposit, one of the world's largest silver and lead producing operations. The Maronan lead-silver mineralisation occurs in two separate but sub-parallel banded carbonate-lead sulphide-magnetite-calcsilicate units referred to as the Western Horizon (Upper) and Eastern Horizon (Lower). The two horizons can be separated by between 30 to 100 metres of quartz clastic meta-sediments (psammite, pelite and quartzite). - An interpreted overprinting copper-gold mineralisation can be compared with the ISCG mineralisation styles at the nearby Eloise and Osborne ore bodies. Mineralisation is associated with intense silica alteration within a bedding-parallel structure focused between the Western and Eastern Lead-Silver mineralised zones and comprises variable pyrite-magnetite and pyrrhotite mineralisation pyrrhotite with variable chalcopyrite. - Gold only mineralisation occurs in the Northern Fold area, up-plunge on bedded Lead-Silver mineralisation within the Eastern Horizon and is associated disseminated arsenopyrite within strong magnetite-carbonate facies/alteration. This zone appears to

Criteria	JORC Code explanation	Commentary
		transition down-plunge to carbonate-sulphide dominant facies/alteration that hosts the lead silver mineralisation.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	- Drill hole location data including the easting, northing, rl, dip, azimuth and hole depth is included in the body of this ASX release in Table 1. - A table of significant drill intercepts is included as Table 2 in the body of this ASX release. - Full assay results for Ag, Au, Cu, Pb and Zn in the reported holes are included as Appendix 2. - All coordinates and azimuths are in MGA94 Zone 54S grid
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	- Assay results have been reported using length-weighting technique to calculate down hole average grades. No top-cuts have been applied. - A cut-off grade of 1% Lead has been used for reporting of Silver-Lead intervals. A cut-off grade of 0.3% Copper has been used for reporting Copper-Gold intervals. Gold only mineralisation is reported above a 0.70g/t gold cutoff. - Up to 3m of internal dilution may be included between mineralised intervals. - Due to the poly-metallic nature of mineralisation at Maronnan, intervals of mineralisation below the cut-off may be included within a broader mineralised zone, Internal dilution below cut-off is also permitted where geological continuity of a particular zone is inferred. - Aggregate intercepts have been included – for example: - MRN26002 – Western Horizon 5.5 metres at 6.6% lead, 97g/t silver from 299m, - Including 2.6 metres at 13% lead, 141g/t silver from 299m

Criteria	JORC Code explanation	Commentary
		In this example, the sub-interval contains significantly higher grade than the broader interval.
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	- Drill holes are interpreted to have intersected the mineralisation at an appropriate intersection angle. Due to the folded nature of the deposit, in some instances drilling may occur down mineralisation. Where observed this is noted and a true width may not be estimated. - Modelled zones of mineralisation at the Maronan Project strike approximately 010 and dip ~ 70W. - Estimated True Widths are reported in Significant Intercept Table 2 of the report and are discussed above in Section1 of the table.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Plan view and cross sectional views are included within the body of the ASX release (Figure 1 to Figure 5).
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All assay results for, gold, silver, copper, lead and zinc for MRN26001, MRN26002, MRN26003, MRN26005 and MRN26006 are reported in Appendix 2 of this ASX release.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or	Maronan Metals routinely collects bulk density measurements for samples. Bulk density is measured using the Archimedes method. There is around 5814 bulk density measurements for the Maronan Project. Prior to the 2024 drill program. Sticks of core averaging around 30cm were selected at regular intervals down the drill hole. For the 2024 program, this was modified and bulk density samples

Criteria	JORC Code explanation	Commentary
	contaminating substances.	were taken to match assay sample intervals. Selection of samples was focused on mineralised domains. Bulk density is variable across the Maronan Deposit. Typically, the bulk density for Carbonate Silver-Lead ore is between 3.0 – 3.1g/cm ³ . Bulk density for pyroxene silver-lead ore is between 3.7 – 3.9g/cm ³ and density for fresh copper-gold mineralisation is around 2.8g/cm ³ .
Further work	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	- Maronan Metals are currently completing a PFS level study on the Maronan Project. - Exploration activities will continue to focus on converting resource from the inferred to indicated category, while also targeting shallow under drilled areas north of the starter zone, and proximal to the location of a potential exploration decline. - Maronan intends to complete between 35,000 to 40,000m of surface drilling over the next 12 months - Mineralisation on the Eastern and Western Horizon Pb-Ag domains remains open down plunge, and requires additional drilling to increase confidence in the existing resource. - The Maronan Copper-Gold resource is open down plunge. Further infill drilling is required to upgrade the resource from inferred to indicated category.

APPENDIX 2. TABLE OF ASSAY RESULTS

HOLE ID	SAMPLE_ID	DEPTH_FROM	DEPTH_TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN26001	MM12880	37	38.26	0.12	0.01	7.4	49.3	68
MRN26001	MM12881	38.26	39.27	0.69	0.02	408	44.2	252
MRN26001	MM12882	39.27	39.84	0.03	0.02	16.3	33.3	56
MRN26001	MM12883	39.84	40.5	0.06	0.01	17.2	39.5	79
MRN26001	MM12884	40.5	41.33	0.03	0.01	14.6	36.7	118
MRN26001	MM12885	41.33	41.82	0.31	0.04	30.8	26.4	210
MRN26001	MM12886	41.82	43	0.14	0.005	6.6	36.7	69
MRN26001	MM12887	43	44	0.04	0.01	4.4	20.3	54
MRN26001	MM12888	44	45	0.08	0.005	8.6	23.2	57
MRN26001	MM12889	45	45.95	1.43	0.005	21.5	99.5	124
MRN26001	MM12890	45.95	46.45	1.15	1.05	98.4	161	227
MRN26001	MM12891	46.45	47.56	4.16	0.26	1250	73	181
MRN26001	MM12892	47.56	48.4	1.13	0.12	193.5	97	274
MRN26001	MM12893	48.4	49	0.68	0.02	133	78	198
MRN26001	MM12894	49	50	0.51	0.01	132	85.9	614
MRN26001	MM12895	50	51	0.2	0.01	57.7	35.9	571
MRN26001	MM12896	51	52	0.37	0.01	167.5	54.5	548
MRN26001	MM12897	52	52.4	1.55	0.03	100.5	315	136
MRN26001	MM12898	52.4	53	0.13	0.01	1.9	77.2	83
MRN26001	MM12899	53	54	0.12	0.01	1.3	56.4	90
MRN26001	MM12901	57	57.8	0.78	0.01	7.4	313	381
MRN26001	MM12902	57.8	58.32	2.08	0.03	167	117.5	892
MRN26001	MM12903	58.32	59	6.48	0.04	367	50.5	441
MRN26001	MM12905	59	59.9	10.65	0.06	734	72.3	321
MRN26001	MM12906	59.9	60.7	6.99	0.05	728	305	359
MRN26001	MM12907	60.7	62	1.55	0.01	179.5	109.5	245
MRN26001	MM12908	62	63	2.65	0.01	352	104.5	148
MRN26001	MM12909	63	64	4.97	0.03	461	360	366
MRN26001	MM12910	64	65	0.98	0.03	30.7	256	590
MRN26001	MM12911	65	66	0.09	0.01	2.7	37.5	979
MRN26001	MM12912	66	66.7	1.56	0.02	113.5	282	806
MRN26001	MM12913	66.7	68	0.07	0.01	6.3	85.3	41
MRN26001	MM12914	68	69	0.02	0.005	1.8	41.9	29
MRN26001	MM12915	69	70	0.02	0.005	2.1	25.1	19
MRN26001	MM12916	80	81	0.2	0.005	45.8	46.8	40
MRN26001	MM12917	81	82	0.09	0.005	120.5	46.6	42
MRN26001	MM12918	90	91	0.09	0.005	35.6	29.7	28
MRN26001	MM12919	98	99	0.03	0.005	8.4	28.9	27
MRN26001	MM12920	111	112	0.04	0.005	34.9	22.5	29
MRN26001	MM12921	121	122	0.06	0.005	129.5	34.2	28
MRN26001	MM12922	130	131	0.09	0.005	7.4	289	106
MRN26001	MM12923	140	141	0.09	0.01	3	148.5	31
MRN26001	MM12924	146	146.81	0.07	0.005	9.9	160	124
MRN26001	MM12926	146.81	147.7	0.96	0.02	525	169.5	60
MRN26001	MM12927	147.7	148.65	0.04	0.005	1.7	123	89

MRN26001	MM12928	148.65	149.15	0.08	0.03	4.3	114.5	169
MRN26001	MM12929	149.15	150	0.74	0.3	6.2	142	252
MRN26001	MM12930	150	151	0.3	0.08	7.2	154	135
MRN26001	MM12934	151	152.1	0.18	0.005	55.3	83	159
MRN26001	MM12935	152.1	152.45	0.37	0.01	537	64.8	201
MRN26001	MM12936	152.45	153	0.04	0.01	5.8	44	59
MRN26001	MM12938	153	154	0.05	0.01	2.4	58.1	80
MRN26001	MM12939	160	161	0.04	0.01	32.3	32.3	35
MRN26001	MM12940	171	171.75	0.03	0.005	6	17	29
MRN26001	MM12941	171.75	172.38	0.04	0.005	5.3	44	38
MRN26001	MM12942	172.38	172.7	0.13	0.005	104.5	28.6	71
MRN26001	MM12943	172.7	173.5	0.11	0.005	190	24	41
MRN26001	MM12944	173.5	174.3	0.08	0.005	24.9	54.7	81
MRN26001	MM12945	174.3	175	0.3	0.005	99.2	116	93
MRN26001	MM12946	175	176	0.84	0.01	52.4	370	184
MRN26001	MM12947	176	177	0.68	0.005	4.3	423	200
MRN26001	MM12948	177	178	0.94	0.005	3.2	605	231
MRN26001	MM12949	178	179	1.57	0.01	3	978	250
MRN26001	MM12951	179	179.5	2.19	0.01	3.3	1285	204
MRN26001	MM12952	179.5	180	0.98	0.01	2.2	650	238
MRN26001	MM12953	180	181	0.24	0.005	3.6	245	267
MRN26001	MM12954	181	181.75	0.07	0.005	1.7	147.5	186
MRN26001	MM12955	181.75	182.6	0.05	0.01	2.6	113.5	221
MRN26001	MM12956	182.6	183.75	0.62	0.005	154	776	58
MRN26001	MM12957	183.75	185	0.06	0.005	2	157.5	185
MRN26001	MM12958	185	186.15	0.05	0.01	3.4	174	159
MRN26001	MM12959	186.15	187	0.95	0.01	57.6	1250	316
MRN26001	MM12960	187	188	1.05	0.01	2.2	1105	312
MRN26001	MM12961	188	189	0.45	0.01	280	266	230
MRN26001	MM12962	189	190	1.31	1.2	1480	651	259
MRN26001	MM12963	190	190.75	0.61	0.02	208	315	171
MRN26001	MM12964	190.75	191.45	0.74	0.01	407	206	190
MRN26001	MM12965	191.45	192.2	0.36	0.02	14.4	361	100
MRN26001	MM12966	192.2	193	3.21	0.02	37.8	914	76
MRN26001	MM12967	200	201	0.26	0.05	8.5	175	30
MRN26001	MM12968	210	211	0.04	0.005	1.8	32.1	12
MRN26001	MM12969	218	219	0.04	0.005	14.9	14.5	24
MRN26001	MM12970	219	220	0.12	0.01	102	59.8	58
MRN26001	MM12971	220	221	0.03	0.005	2.5	61.2	40
MRN26001	MM12972	229	230	0.15	0.01	46.6	74.3	32
MRN26001	MM12973	253.5	254.45	0.06	0.01	12.8	183.5	38
MRN26001	MM12974	254.45	255.8	0.42	0.09	337	99	98
MRN26001	MM12976	255.8	256.5	0.41	0.57	267	100	137
MRN26001	MM12977	256.5	257.23	0.55	0.01	335	117.5	153
MRN26001	MM12978	257.23	258.5	72	0.07	377	50500	870
MRN26001	MM12982	258.5	258.9	1.52	0.04	660	516	188

MRN26001	MM12983	258.9	260.24	0.02	0.01	1.5	96.7	218
MRN26001	MM12984	260.24	261	0.32	0.86	87.2	159	124
MRN26001	MM12985	261	262	0.27	1.22	1305	43.7	30
MRN26001	MM12986	262	263.01	0.39	0.41	269	127.5	33
MRN26001	MM12987	263.01	264.1	0.78	0.2	283	369	87
MRN26001	MM12988	264.1	265.08	1.04	0.3	156	497	43
MRN26001	MM12989	265.08	266.43	0.99	0.08	333	394	41
MRN26001	MM12990	266.43	267	0.7	0.51	277	264	51
MRN26001	MM12991	267	268	1.06	0.12	550	388	50
MRN26001	MM12992	268	269.04	1.24	0.28	792	371	42
MRN26001	MM12993	269.04	269.6	0.81	0.37	286	305	62
MRN26001	MM12994	269.6	270.6	1.96	0.19	293	886	85
MRN26001	MM12995	270.6	271.15	0.04	0.01	3.6	338	139
MRN26001	MM12996	271.15	272.07	0.06	0.02	4.4	144.5	112
MRN26001	MM12997	272.07	273	0.11	0.01	2	262	239
MRN26001	MM12998	273	274	0.06	0.01	1.8	155	102
MRN26001	MM12999	274	274.75	0.06	0.01	1.6	170.5	84
MRN26001	MM13001	274.75	275.4	0.06	0.02	1.1	170.5	116
MRN26001	MM13002	275.4	275.76	1.38	0.02	175.5	465	239
MRN26001	MM13003	275.76	276.11	4.92	3.08	518	992	47
MRN26001	MM13004	276.11	277	0.89	0.5	663	269	52
MRN26001	MM13005	277	278	0.69	0.2	331	265	20
MRN26001	MM13006	278	279	0.48	1.1	342	154	33
MRN26001	MM13007	279	280	1.84	0.56	464	1020	43
MRN26001	MM13008	280	280.71	0.63	0.52	394	257	36
MRN26001	MM13009	280.71	281.96	0.44	0.88	342	136	96
MRN26001	MM13014	281.96	283	0.89	0.43	108	443	86
MRN26001	MM13015	283	284	2.14	0.8	103	925	69
MRN26001	MM13016	284	285	0.7	0.13	269	259	55
MRN26001	MM13017	286.1	286.7	0.61	0.31	155	228	95
MRN26001	MM13018	286.7	287.5	0.8	0.005	81.6	314	153
MRN26001	MM13019	287.5	288.5	0.84	0.005	110	283	149
MRN26001	MM13020	288.5	289.5	0.65	0.005	23.6	571	162
MRN26001	MM13021	289.5	290.5	11.7	0.01	27.5	5790	253
MRN26001	MM13022	290.5	291.6	3.31	0.005	22.7	1325	376
MRN26001	MM13023	293	294	0.1	0.005	6.8	112	72
MRN26001	MM13024	294	295	0.7	1.09	419	167	65
MRN26001	MM13026	295	296	5.66	1.69	189.5	402	31
MRN26001	MM13027	296	297	0.24	1.53	266	81.3	16
MRN26001	MM13028	297	298	0.27	1.8	225	108.5	16
MRN26001	MM13029	298	299	0.93	0.63	466	228	30
MRN26001	MM13030	299	300	0.25	0.73	331	61.4	28
MRN26001	MM13031	300	300.7	0.66	0.13	428	51.5	23
MRN26001	MM13032	300.7	301	2.93	0.42	278	358	155
MRN26001	MM13033	301	302	0.05	0.005	3.7	82.4	89
MRN26001	MM13034	304.75	305.35	0.05	0.005	4.5	102.5	62

MRN26001	MM13035	305.35	306.38	7.04	0.05	1370	1880	554
MRN26001	MM13036	306.38	306.78	72.4	0.19	993	38900	5390
MRN26001	MM13039	306.78	308.05	0.66	0.005	58.3	643	122
MRN26001	MM13040	308.05	309	2.12	0.01	20.7	1535	164
MRN26001	MM13041	320	321	0.05	0.005	9.8	41.9	91
MRN26001	MM13042	326.5	327.6	0.19	0.005	44.5	76.5	87
MRN26002	MM13043	65.5	66.4	1.2	0.07	382	72.8	216
MRN26002	MM13044	66.4	66.9	4.66	0.08	1315	65	55
MRN26002	MM13045	66.9	67.85	3.06	0.04	366	104.5	98
MRN26002	MM13046	67.85	68.45	0.41	0.01	39.3	84.3	793
MRN26002	MM13047	68.45	68.85	0.04	0.01	48.7	5.5	1175
MRN26002	MM13048	68.85	69.4	0.63	0.04	615	279	892
MRN26002	MM13049	69.4	70.25	3.2	0.02	498	498	53
MRN26002	MM13051	70.25	71	0.19	0.01	88.6	80.2	108
MRN26002	MM13052	71	72	0.06	0.005	6.9	22.4	29
MRN26002	MM13053	77	78	0.14	0.01	15.3	65.4	33
MRN26002	MM13054	87	88	0.43	0.01	92.9	279	205
MRN26002	MM13055	97	98	0.06	0.01	10.4	17.6	22
MRN26002	MM13056	107	108	0.2	0.01	69.6	101.5	43
MRN26002	MM13057	112.2	113	0.27	0.005	40.9	92	102
MRN26002	MM13058	113	114	0.46	0.01	234	73.2	49
MRN26002	MM13059	127	128	0.12	0.005	32.6	53.5	53
MRN26002	MM13060	137	138	0.32	0.14	6	37.8	21
MRN26002	MM13061	147	148	0.02	0.005	2.5	19.8	22
MRN26002	MM13062	159	160	0.005	0.01	1.3	13.4	44
MRN26002	MM13063	160	160.7	0.01	0.01	1.7	21.7	122
MRN26002	MM13064	160.7	161.3	0.02	0.01	3.3	22.4	134
MRN26002	MM13065	161.3	162.2	0.47	0.07	724	17.6	134
MRN26002	MM13066	162.2	163	0.01	0.05	1.8	15.8	173
MRN26002	MM13067	163	164	0.005	0.005	1.1	17.4	164
MRN26002	MM13068	164	164.6	0.005	0.005	3	21.4	118
MRN26002	MM13069	164.6	165.6	0.11	0.01	41.2	23.6	141
MRN26002	MM13070	165.6	166.1	0.03	0.005	1.5	58.4	82
MRN26002	MM13071	166.1	166.93	0.02	0.005	2	22.3	98
MRN26002	MM13072	166.93	167.9	0.2	0.03	81.4	28.5	162
MRN26002	MM13073	167.9	169	0.07	0.03	11.4	22.7	141
MRN26002	MM13074	169	170	0.04	0.01	3.8	19.8	130
MRN26002	MM13076	170	171	0.01	0.01	1.6	28.1	50
MRN26002	MM13077	171	172	0.005	0.01	1.5	28.1	52
MRN26002	MM13078	176	177	0.07	0.08	2.4	15.9	15
MRN26002	MM13079	187	188	0.06	0.08	2.6	12.9	20
MRN26002	MM13080	195	196	0.07	0.01	3.7	45.1	39
MRN26002	MM13081	205	206	0.005	0.005	2.5	28.7	16
MRN26002	MM13082	210	211	0.07	0.01	38.8	44.8	24
MRN26002	MM13083	221	222	22	1.16	404	413	1125
MRN26002	MM13084	222	222.6	0.23	0.14	45.6	46.9	175

MRN26002	MM13085	222.6	223.07	0.47	0.03	195.5	43.1	252
MRN26002	MM13086	223.07	224	0.34	0.07	160.5	100.5	322
MRN26002	MM13088	224	225	0.21	0.05	46.4	36.7	47
MRN26002	MM13089	227	228	0.08	0.01	22.6	22.5	21
MRN26002	MM13090	249	250	0.03	0.005	30.2	15.2	128
MRN26002	MM13091	252.6	253.55	1.66	0.01	1140	394	85
MRN26002	MM13092	253.55	254.1	0.03	0.01	5.3	5.4	3
MRN26002	MM13093	254.1	255	50	0.02	63.2	41700	37
MRN26002	MM13094	255	256	23.7	0.02	27.2	33100	32
MRN26002	MM13095	256	257	44.5	0.04	29.4	51500	22
MRN26002	MM13096	257	258.3	8.72	0.01	28	16600	34
MRN26002	MM13097	258.3	259	0.73	0.005	520	282	61
MRN26002	MM13098	259	260.4	0.13	0.005	238	201	73
MRN26002	MM13099	260.4	261	30.4	0.61	54.7	50000	60
MRN26002	MM13101	261	262	2.01	0.01	206	2100	79
MRN26002	MM13102	262	263	3.79	0.005	238	2810	176
MRN26002	MM13103	263	264	5.53	0.01	228	4020	114
MRN26002	MM13104	264	265	0.7	0.01	641	193.5	182
MRN26002	MM13105	265	266	9.73	0.02	357	4470	90
MRN26002	MM13106	266	267.1	4.97	0.75	869	618	79
MRN26002	MM13107	267.1	268	11.15	0.04	1445	2140	102
MRN26002	MM13108	268	269	42.2	0.03	185	21300	60
MRN26002	MM13109	269	270	6.26	0.01	362	2240	45
MRN26002	MM13110	270	271	3.5	0.01	10.7	2360	36
MRN26002	MM13111	271	272	15.45	0.01	22.6	15100	9
MRN26002	MM13112	272	273	23.8	0.02	29	20700	22
MRN26002	MM13113	273	273.7	1.39	0.005	160.5	1000	51
MRN26002	MM13114	273.7	274.23	92.3	0.05	609	142000	42
MRN26002	MM13115	274.23	275	2.47	0.01	914	2710	37
MRN26002	MM13116	275	276	218	0.1	93.5	169500	86
MRN26002	MM13117	276	277.42	101	0.05	77.7	68900	56
MRN26002	MM13118	277.42	277.75	257	0.24	269	210000	77
MRN26002	MM13122	277.75	278.18	11.2	0.02	587	4360	51
MRN26002	MM13123	278.18	279.55	0.79	0.01	364	595	294
MRN26002	MM13124	279.55	281	26.5	0.02	51.5	21100	73
MRN26002	MM13126	281	282	14.45	0.02	8	12250	20
MRN26002	MM13127	282	283	14.75	0.01	10.7	17100	7
MRN26002	MM13128	283	283.56	83.8	0.15	57.8	84600	146
MRN26002	MM13129	283.56	285	0.61	0.01	23.8	356	121
MRN26002	MM13130	285	286	0.21	0.01	1.9	249	52
MRN26002	MM13131	297	298	0.31	0.01	10.5	327	93
MRN26002	MM13132	298	299	2.59	0.01	385	3750	37
MRN26002	MM13133	299	300	31.5	0.04	54.4	55300	40
MRN26002	MM13134	300	301	148	0.13	121	156500	28
MRN26002	MM13135	301	301.6	310	0.19	1085	211000	70
MRN26002	MM13136	301.6	302.7	21.9	0.05	3470	2840	105

MRN26002	MM13137	302.7	303.5	135	0.1	5100	21400	80
MRN26002	MM13138	303.5	304.5	37.8	0.06	4980	5250	57
MRN26002	MM13139	304.5	305.5	0.55	0.01	214	280	86
MRN26002	MM13140	305.5	306.4	0.88	0.05	533	127	71
MRN26002	MM13141	306.4	307.4	1.44	0.01	1165	66.6	54
MRN26002	MM13142	307.4	308	0.58	0.01	149	76.6	110
MRN26002	MM13143	311.3	312	0.21	0.01	95.7	75.6	86
MRN26002	MM13144	320	321	0.08	0.005	27.7	77.3	42
MRN26002	MM13145	330	331	0.3	0.01	126.5	174	78
MRN26002	MM13146	338	339.25	0.11	0.005	32.4	183	31
MRN26002	MM13147	339.25	340	0.33	0.05	230	97.4	48
MRN26002	MM13148	340	341.1	0.9	0.01	235	242	71
MRN26002	MM13149	341.1	342	3.07	0.01	160	1405	12
MRN26002	MM13151	342	343	3.97	0.05	139	1320	27
MRN26002	MM13152	343	344.1	8.77	0.04	837	4020	63
MRN26002	MM13153	344.1	345	0.07	0.005	2.7	327	43
MRN26002	MM13154	345	345.7	0.25	0.01	99.2	270	66
MRN26002	MM13155	345.7	347	100	0.06	259	126000	17
MRN26002	MM13156	347	348	115	0.03	96.2	145500	14
MRN26002	MM13157	348	349	146	0.05	31	202000	12
MRN26002	MM13158	349	350	118	0.06	96.1	169500	20
MRN26002	MM13162	350	351	32.3	0.01	614	40200	87
MRN26002	MM13163	351	352	59.7	0.02	620	29700	371
MRN26002	MM13164	352	353	51.1	0.02	314	54000	24
MRN26002	MM13165	353	354	2.32	0.05	3480	269	30
MRN26002	MM13166	354	355	3.98	0.1	4520	397	32
MRN26002	MM13167	355	356	1.06	0.13	1745	480	27
MRN26002	MM13168	356	357	4.68	0.16	4220	671	63
MRN26002	MM13169	357	358	1.28	0.07	925	400	140
MRN26002	MM13170	358	359	71.9	0.08	783	31600	413
MRN26002	MM13171	359	359.75	0.87	0.01	474	392	100
MRN26002	MM13172	359.75	361	0.87	0.01	1105	220	121
MRN26002	MM13173	361	362	11.85	0.04	775	6460	75
MRN26002	MM13174	362	363.35	1.3	0.02	1380	414	172
MRN26002	MM13176	363.35	364	1.67	1.1	3340	151.5	103
MRN26002	MM13177	364	365.2	2.24	0.05	3770	260	213
MRN26002	MM13178	365.2	366	57.1	0.21	803	32200	936
MRN26002	MM13179	366	367	48.4	0.04	473	29000	621
MRN26002	MM13180	367	367.6	33.9	0.03	503	21400	1245
MRN26002	MM13181	367.6	368.5	26.1	0.05	4610	12500	5810
MRN26002	MM13182	368.5	369.5	17.9	0.06	3550	12850	3570
MRN26002	MM13183	369.5	370.73	0.44	0.01	59.5	449	155
MRN26002	MM13184	370.73	372	0.26	0.01	74.9	185.5	103
MRN26002	MM13185	372	373	0.26	0.09	65.8	177	121
MRN26002	MM13186	373	374.3	0.48	0.02	67.3	349	198
MRN26002	MM13187	374.3	375.1	2.46	0.02	688	545	111

MRN26002	MM13188	375.1	376	1.2	0.01	700	176	66
MRN26002	MM13189	376	377	0.94	0.01	525	124	123
MRN26002	MM13190	377	378	6.76	0.02	946	2320	410
MRN26002	MM13191	378	378.7	99	0.11	259	50300	225
MRN26002	MM13192	378.7	380	0.44	0.01	28.9	618	95
MRN26002	MM13193	380	381.13	1.9	0.01	20.5	1170	80
MRN26002	MM13194	381.13	382	22.9	0.06	1105	11200	294
MRN26002	MM13195	382	382.65	73.2	0.22	2240	37000	65
MRN26002	MM13196	382.65	383.5	4.25	0.05	1080	871	67
MRN26002	MM13197	383.5	385	3.86	0.01	83.1	2190	129
MRN26002	MM13198	390	391	0.83	0.005	150	269	131
MRN26002	MM13199	402	403	0.17	0.01	3.7	61.8	46
MRN26002	MM13201	409	410	0.16	0.005	12.8	71.6	83
MRN26002	MM13202	413	414.5	0.11	0.005	4.5	69.6	35
MRN26002	MM13203	424	425	0.04	0.005	2.9	61.2	48
MRN26003	MM13204	58.5	59.5	0.11	0.07	129	21.8	460
MRN26003	MM13205	64	64.65	0.07	0.09	151	12.1	131
MRN26003	MM13206	64.65	65.55	0.64	0.08	1125	11.6	152
MRN26003	MM13207	65.55	66.55	0.06	0.01	98.5	11	165
MRN26003	MM13208	134.4	135	0.62	0.005	170	92.1	760
MRN26003	MM13209	135	136	0.67	0.005	105	46.5	101
MRN26003	MM13210	143.6	144.5	0.39	0.005	9	507	117
MRN26003	MM13211	144.5	145	76.1	0.7	214	71700	57
MRN26003	MM13212	145	145.8	0.35	0.01	21.9	479	93
MRN26003	MM13213	148	148.85	0.18	0.005	5.7	352	142
MRN26003	MM13214	148.85	149.53	23.4	0.02	268	29600	119
MRN26003	MM13215	149.53	150.5	0.05	0.005	2.2	323	250
MRN26003	MM13216	155.5	156.5	0.5	0.01	845	329	202
MRN26003	MM13217	156.5	157.5	0.3	0.01	463	233	143
MRN26003	MM13218	157.5	158.5	12.8	0.07	354	19600	50
MRN26003	MM13219	158.5	159.6	8.21	0.04	285	11900	138
MRN26003	MM13220	159.6	160.5	0.2	0.005	87.1	280	151
MRN26003	MM13221	165	166	0.09	0.005	5.6	296	124
MRN26003	MM13222	171	172.2	0.09	0.01	21.8	171	100
MRN26003	MM13223	172.2	172.7	0.12	0.005	108	216	59
MRN26003	MM13224	172.7	173.5	0.03	0.005	9.3	156.5	103
MRN26003	MM13226	175.14	176.42	0.49	0.01	647	326	158
MRN26003	MM13227	178	179.1	0.06	0.005	5.6	375	94
MRN26003	MM13228	179.1	180.35	4.97	0.49	89.9	2890	31
MRN26003	MM13229	180.35	181	0.2	0.005	31.9	344	91
MRN26003	MM13230	181	182.4	0.09	0.005	3.8	215	65
MRN26003	MM13231	182.4	183.3	0.1	0.01	65.2	129	92
MRN26003	MM13232	183.3	184.55	60.8	0.04	19.5	56100	27
MRN26003	MM13233	184.55	185.5	0.51	0.005	11.6	792	124
MRN26003	MM13234	189.2	190	0.39	0.01	209	300	129
MRN26003	MM13236	213	214.25	0.11	0.005	32.3	33.2	29

MRN26003	MM13237	214.25	215	10.75	0.27	1125	12750	42
MRN26003	MM13238	215	215.84	36.2	0.03	137.5	55600	53
MRN26003	MM13239	215.84	217	0.18	0.005	26.1	265	73
MRN26003	MM13240	225	225.35	0.26	0.02	158.5	181	107
MRN26003	MM13241	239	239.45	0.84	0.01	420	112	75
MRN26003	MM13242	243	244.6	0.61	0.005	281	88.5	49
MRN26003	MM13243	248	249	0.55	0.51	477	183	55
MRN26003	MM13244	249	250	0.35	0.94	362	65.7	29
MRN26003	MM13245	250	251	10.8	0.03	306	7270	23
MRN26003	MM13246	251	252	73.6	0.02	266	53200	1235
MRN26003	MM13247	252	253.4	69.9	0.04	798	35900	310
MRN26003	MM13248	253.4	254.03	0.23	0.005	3.1	467	241
MRN26003	MM13249	254.03	254.75	1.4	0.1	731	508	144
MRN26003	MM13251	254.75	256	41.1	0.02	13.8	43600	46
MRN26003	MM13252	256	257	66	0.02	43.9	91900	33
MRN26003	MM13253	257	258	31.2	0.01	266	39600	301
MRN26003	MM13254	258	259	1.62	0.01	148	1210	79
MRN26003	MM13255	259	260	43.6	0.07	176	44200	81
MRN26003	MM13256	260	261	72	0.12	562	53600	378
MRN26003	MM13257	261	262	1.36	0.02	723	640	60
MRN26003	MM13258	262	263	28.3	0.03	642	20600	31
MRN26003	MM13259	263	264	30.5	0.05	401	28600	30
MRN26003	MM13260	264	265.2	58.2	0.18	403	45900	44
MRN26003	MM13264	265.2	266	0.2	0.005	326	139	69
MRN26003	MM13265	266	267	0.69	0.04	2220	246	146
MRN26003	MM13266	267	268	12.2	0.67	3160	4070	2970
MRN26003	MM13267	268	268.85	19.8	0.48	7730	11700	5670
MRN26003	MM13268	268.85	269.6	1.37	0.19	3510	526	148
MRN26003	MM13269	269.6	270.15	0.21	0.03	374	314	147
MRN26003	MM13270	270.15	271	0.57	0.11	1490	288	136
MRN26003	MM13271	271	272	15.4	0.43	2610	11000	128
MRN26003	MM13272	272	273	28.1	0.22	821	20600	80
MRN26003	MM13273	273	274	1.91	0.02	809	794	39
MRN26003	MM13274	274	275.25	69.9	0.09	471	32900	38
MRN26003	MM13276	275.25	276	2.31	0.02	727	482	127
MRN26003	MM13277	276	277	0.62	0.005	32.1	486	129
MRN26003	MM13278	277	278	0.98	0.01	57.7	735	218
MRN26003	MM13279	278	279.5	0.43	0.005	17	636	258
MRN26003	MM13280	279.5	280.3	0.58	0.16	98.4	413	178
MRN26003	MM13281	280.3	281	1.4	0.22	687	147.5	106
MRN26003	MM13282	281	282	1.77	0.07	543	255	39
MRN26003	MM13283	282	282.7	21	0.05	281	10550	58
MRN26003	MM13284	282.7	283.5	87.5	0.13	215	44300	193
MRN26003	MM13285	283.5	284.24	39.1	0.09	482	18700	287
MRN26003	MM13286	284.24	285	1.02	0.01	44	887	267
MRN26003	MM13287	287.3	287.75	6.13	0.03	570	1975	457

MRN26003	MM13288	301	302	0.26	0.005	34.9	113	106
MRN26003	MM13289	316	317	0.34	0.005	5.9	151	66
MRN26005	MM13290	47	48	1.05	0.02	170	5380	172
MRN26005	MM13291	48	49	2.32	0.21	2040	41700	951
MRN26005	MM13292	49	49.57	0.7	0.06	766	20100	1120
MRN26005	MM13293	49.57	50.7	13.35	0.04	1110	48200	2100
MRN26005	MM13294	50.8	51.43	21	0.32	871	121000	1620
MRN26005	MM13295	51.43	52.5	14.7	0.05	481	29700	769
MRN26005	MM13296	52.5	53.7	233	0.05	528	81800	1460
MRN26005	MM13297	53.8	54.25	179	0.39	285	20800	706
MRN26005	MM13298	54.25	55	51.2	1.23	412	126000	779
MRN26005	MM13299	55	56	6.13	0.18	435	200000	645
MRN26005	MM13301	56	57	4.22	0.01	416	60400	868
MRN26005	MM13302	57	58	9.76	0.01	1035	67400	483
MRN26005	MM13303	58	59	7.61	0.05	705	43700	310
MRN26005	MM13304	59	60	5.58	0.01	2400	141000	250
MRN26005	MM13305	60	61	8.87	0.02	1535	72100	261
MRN26005	MM13306	61	62	7.99	0.05	1110	81700	141
MRN26005	MM13307	62	63	0.92	0.01	59	28500	88
MRN26005	MM13308	63	64	1.52	0.01	57.3	18150	69
MRN26005	MM13309	64	65	3.87	0.25	1955	4130	44
MRN26005	MM13310	65	66	3.81	0.86	950	676	46
MRN26005	MM13311	66	67	1.74	0.64	399	310	19
MRN26005	MM13313	67	68	35.7	0.17	9080	7340	19
MRN26005	MM13314	68	69	46.8	0.57	8090	7220	43
MRN26005	MM13315	69	70	1.22	0.07	85	906	55
MRN26005	MM13316	70	71	9.67	1.71	180	1320	86
MRN26005	MM13317	71	72	2.78	0.13	107	496	61
MRN26005	MM13318	72	73	1	0.33	70.9	570	35
MRN26005	MM13319	73	74	0.91	0.01	232	989	53
MRN26005	MM13320	74	75	1.68	0.01	2360	4120	323
MRN26005	MM13321	75	76	1.18	0.005	98.6	3340	629
MRN26005	MM13322	76	77	3.28	0.01	2750	15200	424
MRN26005	MM13324	77	78	2.97	0.01	555	44400	365
MRN26005	MM13326	78	78.8	4.59	0.05	83	57000	401
MRN26005	MM13327	78.8	80	2.46	0.005	154	2210	230
MRN26005	MM13328	80	81	0.92	0.005	25.7	654	250
MRN26005	MM13329	81	82	1.74	0.01	24.7	249	126
MRN26005	MM13330	82	83	0.77	0.01	30.5	333	178
MRN26005	MM13331	83	84	0.37	0.005	6.9	132.5	63
MRN26005	MM13332	92	92.77	0.1	0.01	9.7	295	58
MRN26005	MM13333	92.77	93.26	0.55	0.03	44.3	474	95
MRN26005	MM13334	93.26	94	2.21	0.17	395	1825	359
MRN26005	MM13335	94	95	4.4	0.07	352	45400	426
MRN26005	MM13336	95	96	5.23	0.03	3390	29100	254
MRN26005	MM13337	96	97	1.26	0.09	44.7	1935	348

MRN26005	MM13339	97	98	0.58	0.005	16.8	456	260
MRN26005	MM13340	151	152	0.44	0.005	62.1	191	128
MRN26005	MM13341	152	153	0.33	0.005	12.8	125.5	124
MRN26005	MM13342	153	154	1.2	0.005	20.7	1150	550
MRN26005	MM13343	154	154.83	0.49	0.005	11.8	346	183
MRN26005	MM13344	154.83	155.35	2.16	0.005	93.7	491	188
MRN26005	MM13345	155.35	156.22	21.2	0.46	551	7430	51
MRN26005	MM13346	156.22	157	0.19	0.01	9.4	91.2	70
MRN26005	MM13347	157	158	0.36	0.02	19.2	178.5	247
MRN26005	MM13348	180	180.52	0.24	0.005	40.3	48.8	140
MRN26005	MM13349	180.52	181.2	0.34	0.01	64	70.9	138
MRN26005	MM13351	181.2	182	0.2	0.005	44.4	8.7	205
MRN26005	MM13352	182	183	0.23	0.005	21.5	56.6	159
MRN26006	MM13353	87.2	88	1.22	0.01	270	11650	403
MRN26006	MM13354	88	89.1	2.1	0.01	3440	34500	346
MRN26006	MM13355	90.2	91	0.57	0.01	1215	14950	1075
MRN26006	MM13356	91	92	0.28	0.01	165	6940	943
MRN26006	MM13357	92	93.1	0.74	0.01	450	7950	1355
MRN26006	MM13358	93.3	94.1	0.82	0.01	1050	5470	1250
MRN26006	MM13359	94.5	94.8	0.29	0.01	762	46100	3140
MRN26006	MM13360	94.9	95.32	0.73	0.05	539	86900	3920
MRN26006	MM13361	95.32	96	0.73	0.03	695	48500	2880
MRN26006	MM13363	96	96.5	2.05	0.03	2470	40300	2460
MRN26006	MM13364	96.5	97.34	3.32	0.09	2840	96500	1125
MRN26006	MM13365	97.34	98	8.87	0.02	889	134000	1180
MRN26006	MM13366	98	98.7	1.42	0.09	331	123500	819
MRN26006	MM13367	99.7	100.48	8.42	0.06	221	36200	794
MRN26006	MM13368	100.48	100.9	0.62	0.03	142.5	13800	845
MRN26006	MM13369	100.9	102	0.15	0.01	62.4	1620	427
MRN26006	MM13370	102	102.6	0.66	0.02	871	1400	332
MRN26006	MM13371	102.6	103	0.06	0.3	62.9	657	196
MRN26006	MM13372	103	103.47	0.08	0.09	150	420	152
MRN26006	MM13373	103.47	104.2	2.24	0.02	3610	1765	288
MRN26006	MM13374	104.6	106	8.6	0.05	703	71700	1680
MRN26006	MM13376	106	107	3.22	0.01	879	22800	2100
MRN26006	MM13377	107	108	2.99	0.01	362	25800	1480
MRN26006	MM13378	108	109	4.68	0.11	2030	92800	656
MRN26006	MM13379	109	110.1	1.17	0.02	825	37300	353
MRN26006	MM13380	110.5	111	0.87	0.01	52.6	35000	147
MRN26006	MM13381	111	112	0.87	0.03	4060	22000	412
MRN26006	MM13382	112	113	0.94	0.01	350	21400	496
MRN26006	MM13383	113	114	0.82	0.01	1320	22300	335
MRN26006	MM13384	114	115	3.8	0.01	217	43600	446
MRN26006	MM13385	115	116	1.01	0.01	174	8290	218
MRN26006	MM13386	116	116.4	0.59	0.01	131.5	4640	232
MRN26006	MM13388	116.7	118	1.5	4.74	1435	1365	43

MRN26006	MM13389	118	119	0.78	0.03	101	887	79
MRN26006	MM13390	119	119.6	0.68	0.07	110	1270	71
MRN26006	MM13391	119.8	120.7	2.56	0.01	157	922	140
MRN26006	MM13392	120.8	122	0.72	0.02	162	1880	532
MRN26006	MM13393	122	123	1.32	0.01	192.5	343	89
MRN26006	MM13394	123	124	1.32	0.01	154.5	961	219
MRN26006	MM13395	124	125	0.79	0.02	53.1	361	80
MRN26006	MM13396	125	126	1.52	0.02	3760	609	142
MRN26006	MM13397	126	127	3.16	0.01	1945	813	270
MRN26006	MM13398	127	128	1.56	0.01	429	641	181
MRN26006	MM13401	128	129	2.33	0.05	5170	852	279
MRN26006	MM13402	129	130	0.38	0.02	484	1270	286
MRN26006	MM13403	130	131	0.13	0.02	381	704	258
MRN26006	MM13404	131	132	0.36	0.07	167.5	1165	275
MRN26006	MM13405	132	133	0.55	0.02	190.5	1120	287
MRN26006	MM13406	133	133.6	0.96	0.01	393	1750	585
MRN26006	MM13407	133.6	134.92	2.35	0.37	324	578	114
MRN26006	MM13408	134.92	136	0.98	0.29	177	144	47
MRN26006	MM13409	136	137	1.33	0.01	28.2	215	86
MRN26006	MM13410	137	138	1.36	0.005	552	131.5	83
MRN26006	MM13411	138	139	0.36	0.01	29.5	176	93
MRN26006	MM13413	139	140	0.73	0.005	161	82.1	47
MRN26006	MM13414	147	148	0.18	0.005	239	47.5	37
MRN26006	MM13415	148	148.7	1.64	0.03	470	118	109
MRN26006	MM13416	149	150	1.66	0.07	489	551	110
MRN26006	MM13417	150	151	1.94	0.03	958	144	45
MRN26006	MM13418	151	151.71	1.94	0.03	775	572	49
MRN26006	MM13419	151.71	152.68	3.79	0.09	715	1165	145
MRN26006	MM13420	152.68	154	2	0.02	266	534	23
MRN26006	MM13421	154	155	0.16	0.005	90	189	37
MRN26006	MM13422	155	156	0.03	0.005	3.1	5	3
MRN26006	MM13423	156	157	0.31	0.05	196	39.9	23
MRN26006	MM13424	157	158	0.37	0.01	403	37.5	24
MRN26006	MM13426	158	159	0.11	0.005	132	23.9	32
MRN26006	MM13427	159	160	0.5	0.02	464	50	27
MRN26006	MM13428	160	161	0.92	0.01	839	34.2	17
MRN26006	MM13429	161	162	0.38	0.03	246	26.8	14
MRN26006	MM13430	162	163	0.26	0.01	168.5	67.8	25