

STRONG MINERALISATION EXTENSIONS DELIVERED AT DYNASTY

Wide, high-grade gold-silver mineralisation further extended by resource extensional drilling at Brecha-Comanche

Key Highlights

- **Drilling at Brecha-Comanche confirms 30m lateral extension, to a zone of mineralisation discovered in 2025 where hole CVDD25-186 returned 31.4m @ 2.3 g/t Au, 7.1g/t Ag from 375.7m¹. Latest drilling delivers a new significant intercept of:**
 - **16.0m @ 2.8 g/t Au, 9.1 g/t Ag from 433.9m in CVDD25-158².**
- **Resource infill drilling intersects broad zones of mineralisation which will support resource categorisation upgrades, with latest significant results including:**
 - **CVDD26-205:**
 - **19.7m @ 2.6 g/t Au, 14.0 g/t Ag from 253.3m &**
 - **5.5m @ 2.2 g/t Au, 11.6 g/t Ag from 298.1m &**
 - **22.1m @ 2.5 g/t Au, 5.9 g/t Ag from 324.6m**
 - **CVDD24-121:**
 - **12.5m @ 2.8 g/t Au, 28.4 g/t Ag from 337.2m**
- **Multiple high conviction resource growth targets are currently being drilled at the Cerro Verde prospect, with results expected to be incorporated into the Dynasty resource update, targeted for early 2027.**

Titan's CEO Melanie Leighton commented:

"We are excited to be delivering more significant results from our drilling, confirming the quality and predictability of the Dynasty orebody. We have results pending for 17 diamond holes for ~4,600m, as part of our resource growth and conversion drilling programs, while in parallel we also continue to advance the Scoping Studies."

"We are confident that our drilling programs have the potential to materially enhance the Dynasty MRE, with drilling being focused on the Cerro Verde deposit, which already boasts 2.7Moz gold and 16.2Moz silver."

"To accelerate this momentum, we have added a fourth diamond drill rig and will commence operations with an RC rig in October. These additions will enable faster drilling and allow us to evaluate multiple high-priority growth targets over the coming 3-4 months. Given the strong performance of our 2026 drilling program, we now expect to complete the updated MRE, incorporating these drilling results, ahead of the Dynasty Scoping Study, with both expected to be delivered in early 2027."

¹ Refer to ASX release dated 5 February 2026 for further details on CVDD25-186 significant intercept.

² CVDD25-158 was drilled in 2025 to a depth was 423.9m, in 2026 the hole was re-entered and extended to a new maximum depth of 531m.

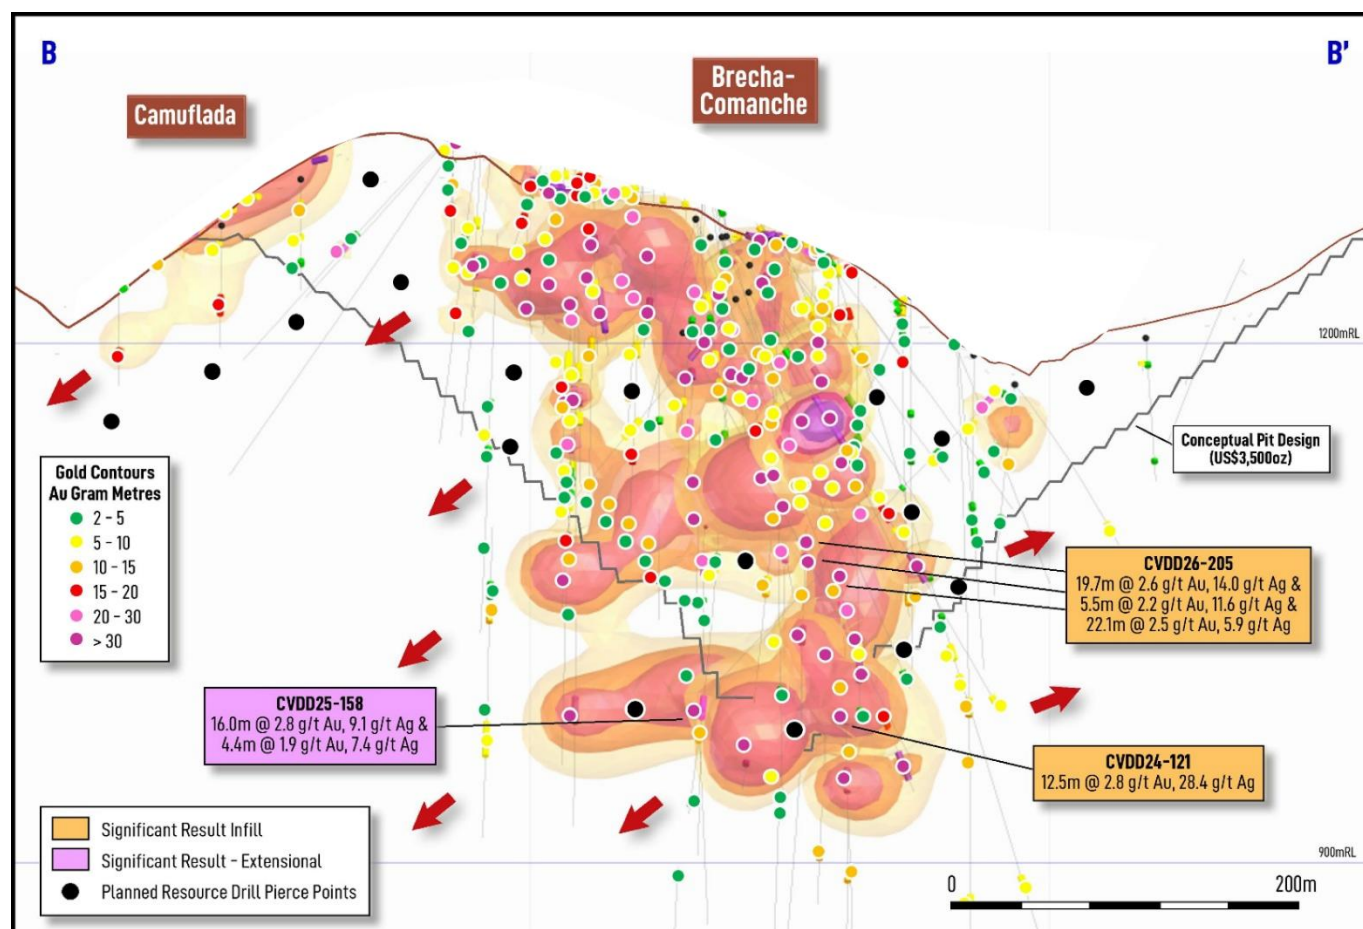


Figure 1. Long Section (300m viewing window) of Brecha-Comanche Target, showing gold gram metres in drilling and contours, conceptual pit design (US\$3,500/oz gold), and latest significant intercepts and planned drill pierce points.

Dynasty Resource Drilling Update

Titan Minerals Limited (**Titan** or the **Company**) (ASX:TTM) is pleased to provide an update on the Company's 100% held Dynasty Gold Project (**Dynasty**) in southern Ecuador, where it has been completing a 10,000m resource definition drilling program at the Cerro Verde prospect as it works towards a Mineral Resource update in early 2027.

The Company is planning to expand the resource drilling program following its recent drilling success, which has delivered multiple significant intercepts in new areas, highlighting the Company's ability to rapidly expand resources with systematic step out drilling. This additional drilling and resource expansion is likely to have a very positive impact on the forthcoming MRE update and Scoping Studies that are currently underway.

One of the most significant outcomes from the recent drilling program is the discovery of a new zone of shear-hosted mineralisation, which returned **33.5m at 6.6 g/t gold and 55.5 g/t silver** from 237m in diamond drill hole **CVDD26-199**³. The result demonstrates the potential scale and tenor of this emerging target and supports further drilling aimed at defining its extent and identifying potential repeat structures.

³ Refer to ASX release dated 20 August 2026 for further detail on CVDD26-199

Extensional Drilling

Latest extensional drilling at the Brecha-Comanche target has successfully extended a zone of broad, high-grade gold-silver mineralisation intersected in Titan's 2025 resource drilling, where diamond hole CVDD25-186⁴ returned a result of **31.4m @ 2.3 g/t Au, 7.1g/t Ag** from 375.7m, highlighting a new zone of mineralisation ~350m below surface, in an area never previously tested.

CVDD25-158 was originally drilled in 2025, however the hole was recently extended to test for interpreted mineralisation extensions intersected in CVDD25-186. Pleasingly, results have confirmed a 30m lateral extension to mineralisation and a new significant intercept of:

- **16.0m @ 2.8 g/t Au, 9.1 g/t Ag** from 433.9m

The new significant drill result was returned from an area outside the current resource, representing valuable resource additions within the Cerro Verde prospect.

Importantly, this latest extensional result confirms the strong continuity of the vein and shear hosted mineralisation, with recent drilling highlighting the remarkable predictability of the Dynasty mineral system.

This has two very positive potential implications for the Dynasty Gold Project:

1. Strong probability of resource growth with continued systematic step out drilling
2. Emerging new zones of wide and continuous mineralisation to be added to the upcoming MRE, increasing OVM's, reducing strip ratios and enhancing mineability and overall project economics

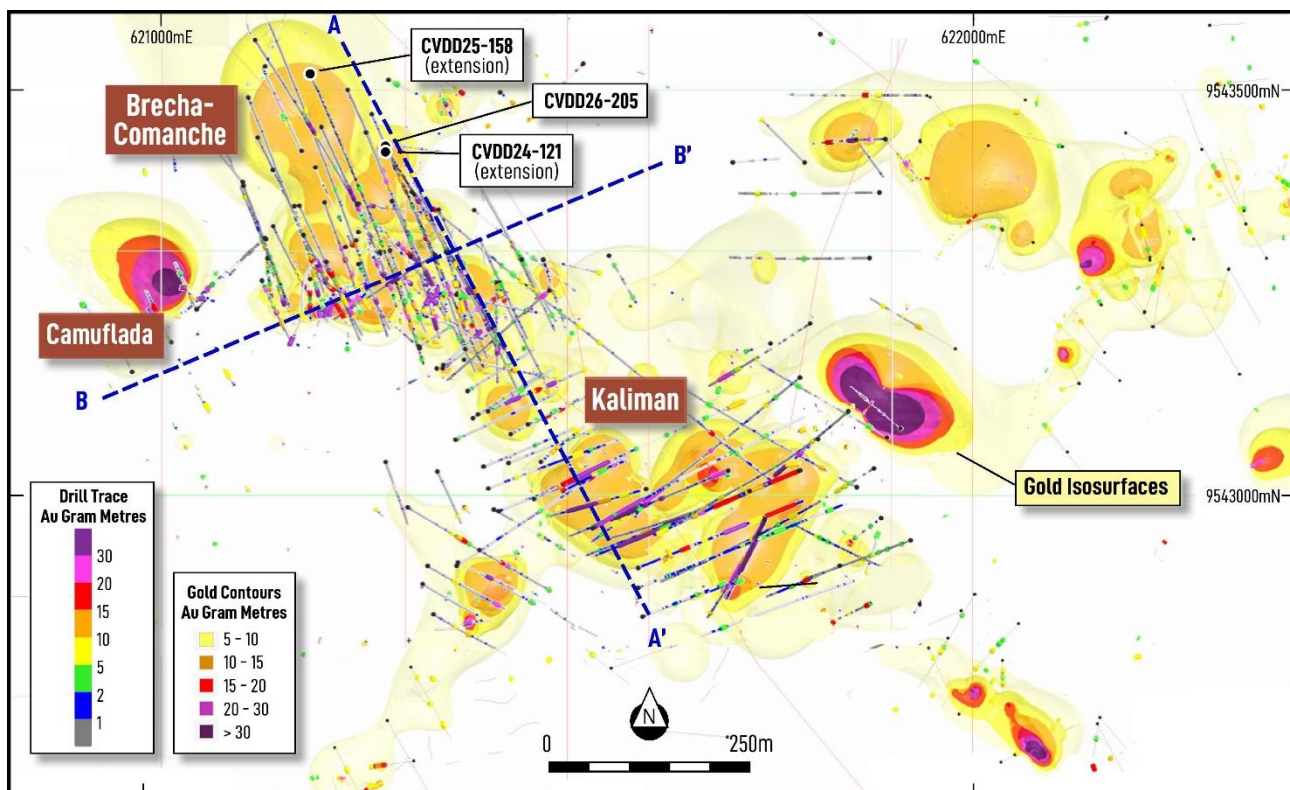


Figure 2. Plan-view of the Cerro Verde prospect showing the Brecha-Comanche and Kaliman targets, showing gold gram metre contours (not MRE), drill traces coloured by gold (gram metres), and locations of the latest significant drill intercepts, locations of the section A-A' and B-B'.

⁴ Refer to ASX release dated 5 February 2026 for further detail on CVDD25-186

Infill Drilling

The Company is pleased to report that resource infill diamond drilling has been successful in intersecting mineralisation in interpreted locations, with new significant intercepts detailed below.

CVDD26-205 was designed to support resource upgrades to Indicated categorisation, by testing interpreted mineralisation continuity at a reduced drill spacing. The mineralisation interpretation was successfully confirmed, also adding further assay and geological data that will refine and improve resource estimation. Several significant intercepts were returned, including:

- **9.7m @ 1.4 g/t Au, 4.3 g/t Ag** from 55.3m &
- **1.0m @ 45.2 g/t Au, 499 g/t Ag** from 179.8m &
- **3.9m @ 1.2 g/t Au, 2.8 g/t Ag** from 218.7m &
- **19.7m @ 2.6 g/t Au, 14.0 g/t Ag** from 253.3m, **including 6.5m @ 3.9 g/t Au. 25.6 g/t Ag & including 5.1m @ 4.9 g/t Au, 21.4 g/t Ag &**
- **5.5m @ 2.2 g/t Au, 11.6 g/t Ag** from 298.1m &
- **22.1m @ 2.5 g/t Au, 5.9 g/t Ag** from 324.6m

CVDD24-121 (extension) was a re-entry hole, designed to infill resources to a 40m spacing to support resource upgrade to Indicated categorisation and validate the geological interpretation. The hole was successful in delivering a new significant result of:

- **12.5m @ 2.8 g/t Au, 28.4 g/t Ag** from 337.2m

Again, these are important results, as they continue to demonstrate the predictability of the orebody, improving the Company's geological understanding, in turn derisking the MRE.

These latest infill results will contribute to resource categorisation upgrades, giving additional assay data and geological information to improve MRE confidence, particularly within the conceptual open pit design which is the focus area for resource conversion drilling.

The Company believes that this infill drilling is an important body of work that will support a future Pre-feasibility Study and Ore Reserve, following completion of the Scoping Study.

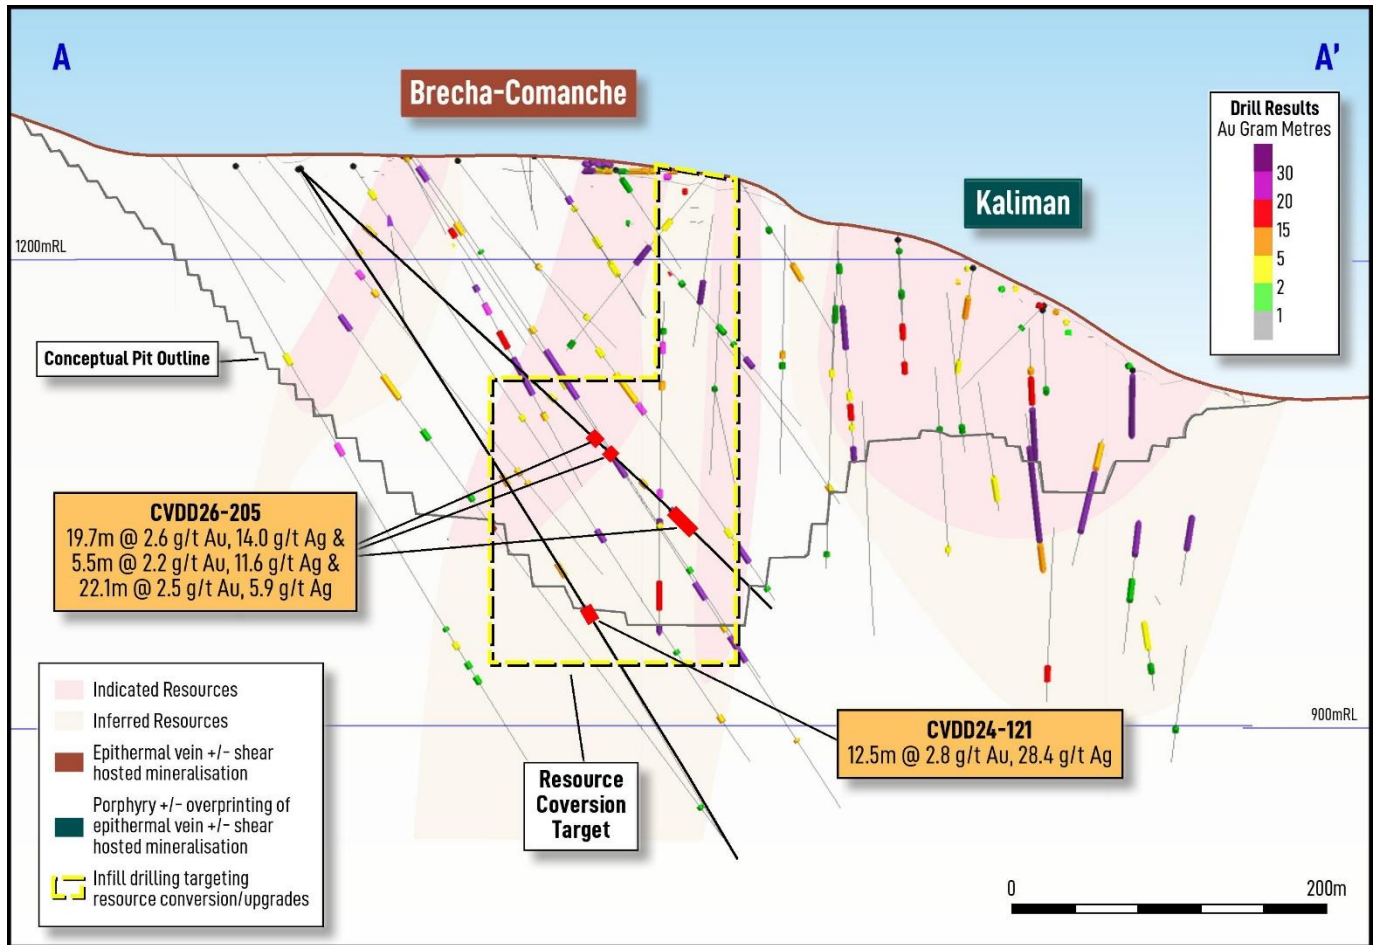


Figure 3. Cross Section (80m viewing window) looking northeast displaying Brecha-Comanche and Kaliman Targets, drilling (gold gram metres), 2026 area of Indicated and Inferred resources, conceptual pit design (US\$3,500/oz gold), and latest significant intercepts.

Drilling & Resource Growth Strategy

The Company has identified several compelling resource growth targets within the Cerro Verde prospect, which it plans to test with extensional drilling this year.

1. Brecha-Comanche Shear Hosted Mineralisation

Latest drilling has unveiled an extensive new zone of gold and silver mineralisation at the Cerro Verde prospect (Cerro Verde), with a significant intercept of **33.5m @ 6.6 g/t Au, 55.5 g/t Ag** from 236.7m in CVDD26-199.

The new significant drill result was returned from an area outside the current resource and represents a valuable resource addition. The high-grade gold-silver intersection is interpreted to be associated with a shear zone, within a broad northwest structural corridor that extends over an area of approximately 1.6 kilometres by 800 metres. Importantly, the shear zone appears to trend sub-parallel to most of the drilling completed at Brecha-Comanche, meaning that this style of shear-hosted mineralisation has likely been missed by drilling to date. Further drilling has been designed and is underway to test for potential repetitions and lateral extensions to the shear zone hosted mineralisation within the broader northwest structural corridor.

2. Brecha-Comanche Waste Dump

The Brecha-Comanche waste dump is located to the west of Brecha-Comanche and Kaliman and is remnant from historic small-scale open pit mining conducted at Dynasty between 2017 and 2019. The waste rock is a

~10-metre-thick veneer covering an area of approximately 250m by 250m and is obscuring the underlying landform. The Company believes that the waste dump potentially masks Brecha-Comanche mineralisation extensions, with new drilling designed to target the presence of mineralisation under the waste dump.

3. Kaliman Porphyry/ Vein/ Shear Extensions

Extensions to broad zones of vein and shear hosted mineralisation at Kaliman remain open and are set to be tested by drilling. The Company has identified better developed mineralisation to have a strong association with lithological contrast/ contact zones, principally at the contact zone with the diorite porphyry “O” unit, which exhibits an abundance of porphyry A-type veinlets.

These rheological contrast target areas also sit within the recently recognised northwest structural corridor, so are also likely influenced by this broader structural setting.

Ongoing surface mapping at the Kaliman target area has provided a strong understanding of the orientation of these important lithological contacts and has aided the recognition of the northwest structural corridor and associated shear zones.

4. Major Structural Intersection Points

The Company has recognised several priority targets at Cerro Verde in areas of structural significance/ confluence that have to date seen limited shallow drilling. At surface narrow-moderate vein hosted mineralisation is evident, however the depth extent and influence of major regional structures have not been adequately tested.

It is hypothesised that previous drilling is likely not deep enough to intersect the preferred stratigraphic units that host most of the mineralisation at Dynasty, especially as these areas are often topographically higher. It is also proposed that the broader structural context hasn't been fully tested due to the distraction of minor vein hosted mineralisation at surface.

The Company intends to test these targets as part of its exploratory drilling programs in 2026 and expects that this drilling has a strong probability of delivering results that could lead to substantial resource expansion.

Dynasty Next Steps

- Titan's resource drilling program is set to be expanded to allow for high value extensional targets to be incorporated into the MRE update, which is anticipated in Q1 2027.
- Several extensional targets are set to be drilled at Cerro Verde, where Titan's 2025 drilling delivered, wide significant intersections that remain open, representing valuable potential resource additions.
- The Dynasty Scoping Study is well advanced, with delivery now anticipated in Q1 2027. The slight pushback in delivery time is to allow time for the MRE update to be incorporated into the study, which has the potential to substantially improve annual mine production targets and overall project economics.

A significant number of results are expected in the coming weeks as the Company advances its resource drilling program at Cerro Verde. Four diamond drill rigs are currently in operation and an RC rig soon to be added to the drill fleet, guaranteeing a significant amount of news to be delivered, as Titan also advances the Scoping Study for Dynasty.

ENDS-

Released with the authority of the Board.

Contact details:

Investor Relations: Australia

Melanie Leighton
Chief Executive Officer
E: melanie@titanminerals.com.au
Ph: +61 8 6555 2950

Jane Morgan
Investor & Media Relations
E: jm@janemorganmanagement.com.au
Ph: + 61 405 555 618

For further information on the company and our projects, please visit www.titanminerals.com.au

About the Dynasty Gold Project

The Dynasty Gold Project is an advanced exploration- early resource stage project comprising five contiguous concessions and is 139km² in area. Three of these concessions received Environmental Authorisation in 2016 and are fully permitted for all exploration and small-scale mining activities.

Exploration work at the Dynasty Gold Project has outlined an extensive zone of epithermal veining over a nine-kilometre strike. There is also considerable potential for porphyry copper mineralisation as identified by surface mapping, trenching, and drilling at the Kaliman prospect and by surface geochemistry and mapping at the Cola and Gisell prospects.

Dynasty Mineral Resource Estimate, March 2026

Table 1. Dynasty Gold Project MRE reported by deposit area

MRE Version	Deposit	Tonnes	Grade		Ounces (M)	
		(M)	(Au g/t)	Ag (g/t)	Gold	Silver
2026 ⁵	Cerro Verde	50.82	1.66	9.89	2.70	16.15
2023 ⁶	Iguana	10.93	2.02	13.68	0.71	4.81
	Trapichillo	2.94	3.80	39.31	0.36	3.71
	Papayal	0.87	4.54	50.85	0.13	1.43
Total MRE		65.55	1.85	12.38	3.90	26.10

NB. Minor discrepancies may occur due to rounding. Tables are rounded as the final steps. Totals are not calculated after rounding. M – million. g/t – grams per tonne.

Table 2. Dynasty Gold Project MRE reported by resource categorisation

Resource Category	Tonnes	Au	Ag	Gold Ounces	Silver Ounces
	(M)	(g/t)	(g/t)	(M)	(M)
Indicated	17.36	2.18	13.94	1.21	7.78
Inferred	48.20	1.73	11.82	2.68	18.32
Total MRE	65.55	1.85	12.38	3.90	26.10

Note. Minor discrepancies may occur due to rounding. Tables are rounded as the final steps. Totals are not calculated after rounding. M – million. Oz-ounce. g/t – grams per tonne.

⁵ Cerro Verde deposit MRE update by Entech Mining, March 2026.

⁶ Iguana, Papayal and Trapichillo MRE unchanged. Completed by Haren Consulting, July 2023.

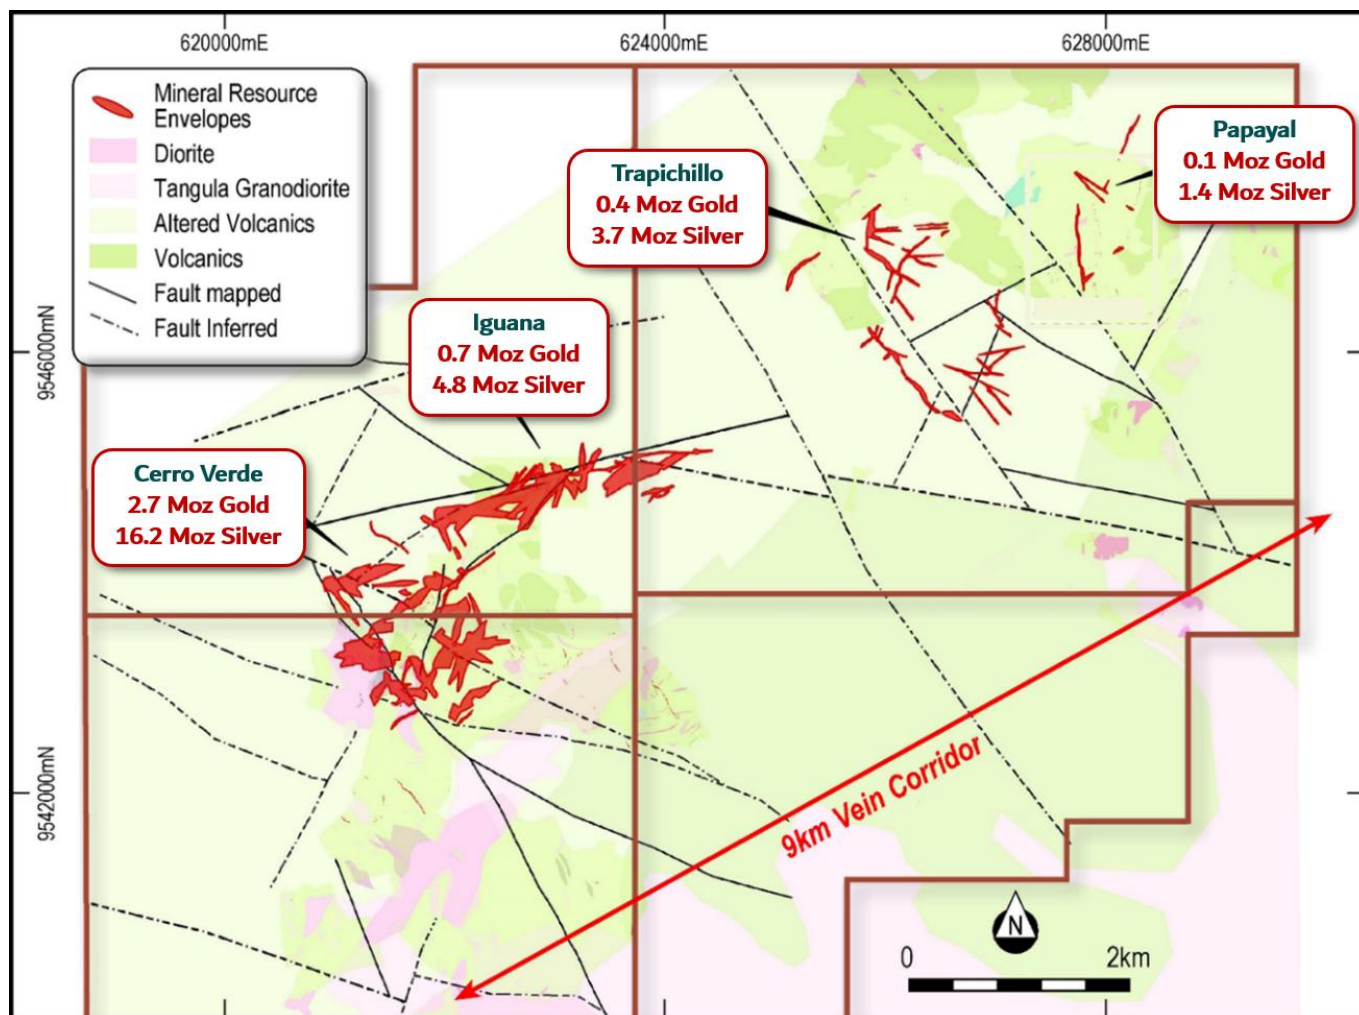


Figure 4. Dynasty Gold Project displaying Mineral Resources, simplified interpreted geology and prospect locations

Competent Person's Statements

The information in this report that relates to Exploration Results is based on and fairly represents information compiled by Ms Melanie Leighton, who is an experienced geologist and a Member of The Australian Institute of Geoscientists. Ms Leighton is a full-time employee at Titan Minerals and has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which she is undertaking to qualify as a Competent Person as defined in the JORC 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources, and Ore Reserves'. Ms Leighton consents to their inclusion in the report of the matters based on this information in the form and context in which it appears.

With respect to estimates of Mineral Resources, announced on 18 March 2026, (MRE Announcement) the Company confirms that it is not aware of any new information or data that materially effects the information in the MRE Announcement and that all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed.

With respect to estimates of Mineral Resources, announced on 6 July 2023, (MRE Announcement) the Company confirms that it is not aware of any new information or data that materially effects the information in the MRE Announcement and that all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed.

Forward-looking Statements

This announcement may contain "forward-looking statements" and "forward-looking information", including statements and forecasts. Often, but not always, forward-looking information can be identified by the use of words such as "plans", "expects", "is expected", "is expecting", "budget", "outlook", "scheduled", "estimates", "forecasts", "intends", "anticipates", or "believes", or variations (including negative variations) of such words and phrases, or state that certain actions, events or results "may", "could", "would", "might", or "will" be taken, occur or be achieved. Such information is based on assumptions and judgments of Titan's directors and management regarding future events and results.

The purpose of forward-looking information is to provide the audience with information about Titan's expectations and plans. Readers are cautioned that forward-looking information involves known and unknown risks, uncertainties and other factors which may cause the actual results, performance or achievements of Titan and/or its subsidiaries to be materially different from any future results, performance or achievements expressed or implied by the forward-looking information. Forward-looking information and statements are based on the reasonable assumptions, estimates, analysis and opinions of Titan directors and management made in light of their experience and their perception of trends, current conditions and expected developments, as well as other factors that Titan directors and management believe to be relevant and reasonable in the circumstances at the date such statements are made, but which may prove to be incorrect. Titan believes that the assumptions and expectations reflected in such forward-looking statements and information are reasonable.

Readers are cautioned that the foregoing list is not exhaustive of all factors and assumptions which may have been used. Titan does not undertake to update any forward-looking information or statements, except in accordance with applicable securities law.

Appendix A.

Table 1. Significant Drill Results

Hole ID		From (m)	To (m)	Width (m)	Au (g/t)	Ag (g/t)
CVDD26-205		55.3	65.0	9.7	1.4	4.3
		179.8	180.8	1.0	45.2	499.0
		218.7	222.6	3.9	1.2	2.8
		253.3	273.1	19.7	2.6	14.0
	incl	253.3	259.8	6.5	3.9	25.6
	& incl	268.0	273.1	5.1	4.9	21.4
		298.1	303.6	5.5	2.2	11.6
		324.6	346.6	22.1	2.5	5.9
CVDD25-158		433.9	449.9	16	2.8	9.1
		465.5	469.9	4.4	1.9	7.4
CVDD24-121		337.2	349.6	12.5	2.8	28.4

NB. Significant intercepts are nominally reported > 0.2 g/t Au for epithermal gold intercepts, and > 0.1 g/t Au for porphyry hosted gold intercepts.

Table 2. Drill Collar Details

Prospect	Hole ID	Northing (UTM)	Easting (UTM)	Elevation (UTM)	Depth (m)	Azimuth (°)	Dip (°)
Brecha-Comanche	CVDD26-205	621274.9	9543429.9	1258.7	406.4	155	-43
Brecha-Comanche	CVDD25-158	621183.5	9543517.3	1297.2	531.0	155	-46
Brecha-Comanche	CVDD24-121	621274.9	9543430.3	1258.8	531.4	150	-55

NB. All drilling is completed in WGS84 Zone 17S

APPENDIX B

Dynasty Project - 2012 JORC Table 1

Section 1 Sampling Techniques and Data

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information.</i>	- Diamond drilling method was used to obtain HTW and NTW core (71.4/56.23 mm diameter respectively) for density and chemical analyses. ½ or ¼ core was submitted for analysis. - Downhole survey and core orientation tools are used, Diamond core is halved with a diamond saw to ensure a representative sample. - Channel sampling is completed as representative cut samples across measured intervals cut with hammer or hammer and chisel techniques. - Samples were crushed to better than 70% passing a 2mm mesh and split to produce a 250g charge pulverised to 200 mesh to form a pulp sample. 50g charges were split from each pulp for fire assay for Au with an atomic absorption (AA) finish and samples exceeding 10g/t Au (upper limit) have a separate 0g charge split and analysed by fire assay with a gravimetric finish. Samples returning >10ppm Au from the AA finish technique are re-analysed by 30g fire assay for Au with a gravimetric finish. - An additional charge is split from sample for four acid digests with ICP-MS reporting a 48-element suite. - Within the 48 elements suite, overlimit analyses of a 5-element suite are performed with an ore grade technique (ICP-AES) if any one element for Ag, Pb, Zn, Cu, Mo exceeds detection limits in the ICP-MS method.
Drilling techniques	<i>Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit, or other type, whether core is oriented and if so, by what method, etc).</i>	- Drilling HTW diameter core with standard tube core barrels retrieved by wire line, reducing to NTW diameter core as required at depth. - Drill core is oriented by Reflex ACT III and True Core tools.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse</i>	- Diamond sample recovery is recorded on a run-by-run basis during drilling with measurements of recovered material ratioed against drill advance. - Diamond core is split in weathered material, and in competent unweathered/fresh rock is cut by a diamond saw to maintain a representative sample for the length of the sample interval. - No correlation between sample recovery and grade is observed.

Criteria	JORC Code Explanation	Commentary
	material.	
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	- Diamond core samples are logged in detail, with descriptions and coded lithology for modelling purposes, with additional logging comprised of alteration, geotechnical, recovery, and structural logs including measurements based on core orientation marks generated from a Reflex ACTIII downhole survey tool. - Logging is predominantly qualitative in nature but including visual quantitative assessment of sulphide and quartz content included in text comments. - Core photographs are systematically acquired for whole core with sample intervals, orientation line prior and after the sampling in both wet and dry form. - The total lengths of all reported drill holes have been logged geologically and data is uploaded to a self-validating database. ½ cut and ¼ cut core material is retained from diamond drilling for re-logging and audit purposes.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all cores taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality, and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- Diamond core is split or cut in weathered profile depending on hardness and competency of the core and cut with a diamond saw in fresh rock. Weathered, faulted, and fractured diamond core, prior to cutting, are docked, and covered with packing tape to ensure a representative half sample is taken. - A outline on core is systematically applied for cutting and portion of core collected for analysis is systematic within each hole. Diamond core sample recovery is completed in accordance with best practices for the time of acquisition and considered to be appropriate and of good quality. - Sample size studies have not been conducted but sample size used are typical of methods used for other Andean deposits of similar mineralisation styles.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.	- Assaying and Laboratory procedures reported are completed by certified independent labs and considered to be appropriate and in accordance with best practices for the type and style of mineralisation being assayed for. Gold Fire Assay technique used is a total recovery technique for gold analysis. This technique is considered an appropriate method to evaluate total gold and silver content of the samples. - No geophysical tools used in relation to the reported exploration results. - In addition to the laboratory's own quality control ("QC") procedure(s), Titan Minerals Ltd- regularly inserts its own Quality assurance and QC samples, with over 15% of samples in reported results corresponding to an inserted combination of certified reference materials (standards), certified blank material, field duplicate, lab duplicates (on both fine and coarse fraction material).
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes.	- Reported intersections are logged by professional geologists in Australia and data validated by a senior geologist in Ecuador. - Twin holes have not been used in the reported exploration results. The use of twinned holes is anticipated in follow-up drilling.

Criteria	JORC Code Explanation	Commentary
	- Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- Original laboratory data files in CSV and locked PDF formats are stored together with the merged data. - All drilling, and surface data are stored in a self-validating MX Deposit geological database. - No adjustment to data is made in the reported results
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used - Quality and adequacy of topographic control.	- Reported drill collars and channel samples are located with an RTK GPS survey unit with sub-centimetre reporting for the purpose of improved confidence in resource estimation work. A gyroscopic survey tool is used for downhole surveys. - All surveyed data is collected and stored in WGS84 datum. - Topographic control is ground survey quality and reconciled against Drone platform survey data with 1m pixel resolution. Assessed to be adequate for the purpose of resource estimation - Grid system used for all undertakings at the Dynasty Project is WGS84 Zone 17 South
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	- Data spacing for reported diamond drilling varies by prospect, targeting a nominal 80m lateral spacing and 80m vertical spacing for data acquisition to support Inferred Resources, and 40 lateral spacing x 40m vertical spacing to support Indicated Resources. - Reported Channel sampling is collected on 10m to 20m spacing depending on resolution of structural information deemed necessary by the geology team. - Data spacing is anticipated to support mineral resource estimation for the indicated and inferred categories, with data spacing and distribution for higher confidence resource estimation categories to be defined with further modelling and geostatistical analysis work. - No Sample compositing has been applied in reported exploration results.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- The orientation of diamond drilling and trenching is perpendicular to mapped orientation of primary vein and porphyry target observed in outcrop where possible. - Drilling is often completed on multiple azimuths as fan drilling with multiple holes collared from a single drill site to minimise surface disturbance, which will result in some oblique intercepts to vein orientations. - The true thickness of intercepts will be accounted for following structural analysis of oriented core and 3D modelling of veins. All results in relation to this report are drilled thickness and should not be interpreted as true thickness at this time. - No bias is considered to have been introduced by the existing sampling orientation.
Sample security	The measures taken to ensure sample security.	Samples were collected by Titan Minerals geologists and held in a secure yard prior to shipment for laboratory analysis. Samples are enclosed in polyweave sacks for delivery to the lab and weighed individually prior to shipment and upon arrival at the lab. Sample shipment is completed through a commercial transport company with closed stowage area for transport.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits or reviews of reported data completed outside of standard checks on inserted QAQC sampling.

Section 2 - Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- Titan Minerals Ltd, through its indirect wholly owned Ecuadorian subsidiaries, holds a portfolio of exploration properties in the Loja Province of Ecuador. Amongst these, Titan holds a 100% interest in the Pilo 9, Zar, Zar 1, Zar 3A and Cecilia 1 concessions forming the Dynasty Project and totalling an area of 13,909 hectares. - Mineral concessions in Ecuador are subject to government royalty, the amount of which varies from 3% to 4% depending on scale of operations and for large scale operations (>1,000tpd underground or >3,000tpd open pit) is subject to negotiation of a mineral/mining agreement. - Pilo 9, Zar and Zar 1 are subject to a 3% royalty payable to the Ecuador Government as part of the Small Scale Mine Licensing regime currently issued in favour of the Dynasty Gold Project but may be subject to change in the event economic studies after exploration indicate a need to apply for a change of regime. - Concessions, Zar 3A and Cecilia 1 have not yet completed the environmental permitting process and require the grant of an Environmental Authorisation. - Mineral concessions require the holder to (i) pay an annual conservation fee per hectare, (ii) provide an annual environmental update report for the concessions including details of the environmental protection works program to be followed for the following year. These works do not need approval; and (iii) an annual report on the previous year's exploration and production activity. Mineral Concessions are renewable by the Ecuadorian Ministry of Oil, Mining and Energy in accordance with the Mining Law on such terms and conditions as defined in the Mining Law.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- Dynasty Gold Project Exploration done by other parties set out in further detail in the Titan ASX release dated 19 May 2020, and summarised below: - In 1977, the Spanish-Ecuadorian joint venture company, Enadimsa, claimed 1,350ha in the La Zanja (Cerro Verde) area for exploration - no results included in reporting. - During the 1970s the United Nations explored the "Curiplaya" area, 2 km east of the Dynasty Project. Copper and gold were detected in small quantities, data not included in reporting. 1991–92, BHP Exploration Ltd. covered the general area with concessions, but the tenements eventually lapsed after minimal work. 2001 to 2003, a private prospecting company, Ecuasaxon, undertook investigations in the general area and discovered anomalous gold and silver in quartz-sulphide veins in what is now the concession area. 2003 until 2007 Dynasty Mining and Metals (later Core Gold) completed mapping, limited ground geophysical surveys and exploration sampling activity including 201 drill holes totalling 26,733.5m and 2,033 rock channel samples were taken from 1,161 surface trenches at Cerro Verde, Iguana Este, Trapichillo and Papayal in support of a maiden resource estimation. 2008 to 2009, the Ecuadorian Government introduced an exploration moratorium, where on April 18, 2008, Ecuador's Constitutional Assembly passed a Constituent Mandate resolution (the "Mining Mandate"), which provided, among other provisions, for the suspension of mineral exploration activities for 180 days, or until a new Mining Act was approved. The Mining Act was published in late January 2009. The mining regulations to supplement and provide rules which govern the Mining Act were issued in November 2009, after which time the Mining Act and Regulations (collectively, the "Mining Law") were enacted. 2017 to 2020 Core Gold Inc. (formerly Dynasty Mining and Metals) commenced small scale mining on a small portion of the Dynasty Project. Operations exposed a number of veins of the Canadian NI 43-101 compliant resource estimate, and operations discovered several veins of varying orientations not previously identified in drill and trench exploration activities requiring further exploration activity to quantify.
Geology	Deposit type, geological setting, and style of mineralisation.	Regionally, the Dynasty gold project lies within the compressional Inter-Andean Graben that is bounded by regional scale faults. The graben is

Criteria	JORC Code explanation	Commentary
		composed of thick Oligocene to Miocene aged volcano- sedimentary sequences that cover the Chaucha, Amotape and Guamote terrains. This structural zone hosts several significant epithermal, porphyry, mesothermal, S-type granitoid, VHMS and ultramafic/ophiolite precious metal and base metal mineral deposits. - At the project scale, the intermediate volcanic hosted mineralised veins mainly occur along a faulted zone near and sub-parallel to the contact with the Cretaceous aged Tangua Batholith that extends north from Peru and is found outcropping in the east and south of the concessions. - Porphyry intrusion style mineralisation hosting gold and copper mineralisation has also been mapped and intersected by drilling by at the Kaliman porphyry within the Dynasty Project area. - Gold occurs in its native form along with sulphides, including pyrite, sphalerite, galena, arsenopyrite, marcasite, chalcopyrite and bornite.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	- Tabulation of requisite information for all reported drilling results with significant intercepts validated by Titan geologists and referenced in this report are included in Appendix A of this report. - Total number of drill holes and trench sites included in this report and located in graphics included in the report.
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	- No high-grade assay cut was applied to reported gold results. In the case of silver, the initial upper detection limit of the four-acid digest used is 100ppm, and an overlimit analysis method with an upper detection limit of 1,500ppm is used. - Lower cut-off for reported significant intercepts is nominally 0.1 g/t Au (porphyry) and 0.2 g/t Au (epithermal) with up to 4m of internal dilution (results with <0.2 g/t Au or un-sampled intervals where null values are taken as a zero-gold grade in calculating significant intercepts) are allowed within a reported intercept. - No metal equivalent reporting is applicable to this announcement
Relationship between mineralisation	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the	- Reported intersections are measured sample lengths. Reported trench and channel intersections are of unknown true width, further drilling and modelling of results is required to confirm the projected dip(s) of mineralised zones. - Reported intercepts are drilled thickness and should not be interpreted as true

Criteria	JORC Code explanation	Commentary
widths and intercept lengths	<i>mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known').</i>	thickness unless otherwise indicated.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Included in body of report as deemed appropriate by the competent person
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.</i>	- All material exploration results for surface geochemistry are included in the appendices of this report, and location of all results are included in figures provided in their entirety. - All results above 0.2 g/t Au are included when reporting high grade vein hosted gold mineralisation. No upper cut-off has been applied.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	- No other available datasets are considered relevant to reported exploration results. Historical exploration results include orientation studies for ground magnetics, IP Geophysics, and soil sampling grids, however each of these surveys are limited in scale relative to the project and are not considered material to assess potential of the larger project area. - Bulk density tests have been completed on areas related to the reported exploration results.
Further work	<i>The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	- Additional mapping, trenching and drilling is planned to better define structural controls on mineralisation and assess open ended mineralisation on multiple mineralised corridors within the project area. Further mapping and sampling are to be conducted along strike of reported work to refine and prioritise targets for drill testing. - Included in body of report as deemed appropriate by the competent person.