

PMET Conducts Large Scale Caesium Sampling Program at CVI3

Collection of pollucite pegmatite samples at scale supports ongoing development studies including further concentrate recovery and downstream caesium chemical testwork

September 8, 2026 – Montreal, QC, Canada

September 9, 2026 – Sydney, Australia

HIGHLIGHTS

- More than **2.5 tonnes of pollucite pegmatite collected to date** from outcrop at the Vega Zone (CVI3).
- Collection utilizing very large diameter drill core (~30 cm) from a grid of shallow holes (<60 cm) over mineralized outcrop offering **significant advantages**:
 - **Larger size fragments** (~30 cm) and **larger quantity of sample**.
 - **Fast and low-cost** collection method.
 - Pollucite concentrate derived from these **samples will support larger scale downstream chemical testwork programs** and industry product engagement.
- The Company continues engaging with strategic caesium players downstream, including building on its existing relationship with Koch Technology Solutions for chemical processing.
- Samples of pollucite pegmatite outcrop will continue to be collected as practical through the fall, with ore sorting testwork anticipated to begin in Q4 2026.

PMET RESOURCES INC. (THE “COMPANY” OR “PMET”) (TSX: PMET) (ASX: PMT) (OTCQX: PMETF) (FSE: R9GA) is pleased to provide an update on its previously announced program targeting the collection of multiple tonne samples of pollucite pegmatite, supporting ongoing development testwork for concentrate production and downstream initiatives (collectively, the “BerryPick” program). The sample is being collected from an outcrop of the Vega Caesium Zone at the CVI3 Pegmatite, where previous channel sampling returned 3.0 m at 9.43% Cs₂O (see news release dated [April 9, 2025](#)).

More than 2.5 tonnes of pollucite pegmatite has been collected to date by way of an innovative shallow coring sampling program utilizing very large diameter drill core (~30 cm) from a grid of shallow holes (<60 cm) over the mineralized outcrop occurrence (Figure 1, Figure 2, Figure 3, and Figure 4). The core samples collected from the outcrop will be composited and submitted for ore sorting testwork, including geochemical analysis, which is anticipated to commence in Q4 2026. Final grades of composites will be announced with ore sorting test program results when received and compiled.



Figure 1: (TOP) Shallow coring drill rig set-up directly on top of pollucite pegmatite outcrop at the CV13 Vega Zone, where previous channel sampling returned 3.0 m at 9.43% Cs_2O (see news release dated [April 9, 2025](#)); (BOTTOM) Interval of pollucite pegmatite drill core recovered (~30 cm x 20 cm). Core is estimated at >90% pollucite presenting as massive crystals with common spodumene/pollucite/lepidolite veining (see Table 1).



Figure 2: (TOP) Cored drill hole (~30 cm diameter) in pollucite pegmatite outcrop; (BOTTOM) Grid of cored drill holes (~30 cm diameter) in pollucite pegmatite outcrop (see Table I). Segments between holes are jackhammered out and added to sample composite.



Figure 3: Bulk tonnage bags of pollucite pegmatite sample composites ready for shipping to the lab (see Table I).

Pollucite (as described in Figure 1, Figure 2, Figure 3, and Table I) has been determined based on visual identification, portable XRF readings on site, as well as prior sampling and geochemical assay of the outcrop (see news release dated [April 9, 2025](#)). The core samples collected from the outcrop will be composited and submitted for ore sorting testwork, including geochemical analysis, which is anticipated to commence in Q4 2026. Final grades of composites will be announced with ore sorting test program results when received and compiled. Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.

Table I: Estimate of abundances of any minerals observed per ASX Compliance Update 04/23.

Figure Number	Nature of Occurrence	Visual Estimates of Mineral(s) & Abundance	Expected Timing of Assays
Figure 1 (Top)	Massive/veined	>5% pollucite in orange area with minor amounts of lepidolite & spodumene, remainder feldspar>quartz	Mid 2027
Figure 1 (Bottom)	Massive/veined	>90% pollucite with common spodumene/lepidolite and minor feldspar/quartz	Mid 2027
Figure 2 (Top)	Massive/veined	>5% pollucite in orange area with minor amounts of lepidolite & spodumene, remainder feldspar>quartz	Mid 2027
Figure 2 (Bottom)	Massive/veined	>5% pollucite in orange area with minor amounts of lepidolite & spodumene, remainder feldspar>quartz	Mid 2027
Figure 3	Massive/veined	~15% pollucite, common spodumene/lepidolite, minor feldspar>quartz (LEFT); <5% pollucite, minor spodumene/lepidolite, minor feldspar>quartz (RIGHT)	Mid 2027

SAMPLE COLLECTION METHODOLOGY AND TESTWORK

The sample collection methodology undertaken in the BerryPick program offers significant advantages. It provides larger diameter samples (~30 cm) required for more advanced ore sorting testwork. Having larger size pegmatite fragments (upwards of 30 cm) is required for future feasibility level data and allows for a more accurate assessment of recovery behavior during a mining operation as the sample better approximates blasted Run of Mine material after crushing compared to drill core.

Prior testwork had been limited to NQ (4.8 cm) and HQ (6.4 cm) core sizes as this was what material size was available, which was sufficient to support initial testwork programs. **The BerryPick program samples will provide much larger size fragments at greater volume suitable for feasibility level assessment.**

The current sampling program methodology also avoids the alternative (and significantly more expensive) methods of collection for large-size fragments at sufficient scale (which could include blasting and/or PQ coring – 8.5 cm) to support more advanced test programs. Further, it allows for large quantities of representative pollucite concentrate sample to be generated over a much shorter time period.

The Company's primary objective of this program is to produce 500 – 1,000 kg of pollucite concentrate to support ongoing development testwork for pollucite concentrate production and downstream caesium chemical testwork. This would include potential future chemical testwork programs with Koch Technology Solutions, as the Company furthers engagement with strategic partners in the caesium industry downstream (see news releases dated [April 15, 2026](#) and [July 12, 2026](#)).

The Company will continue to collect pollucite pegmatite samples as practical through the fall with ore sorting testwork anticipated to begin in Q4 2026 with results anticipated to be received and announced in the first half of 2027.

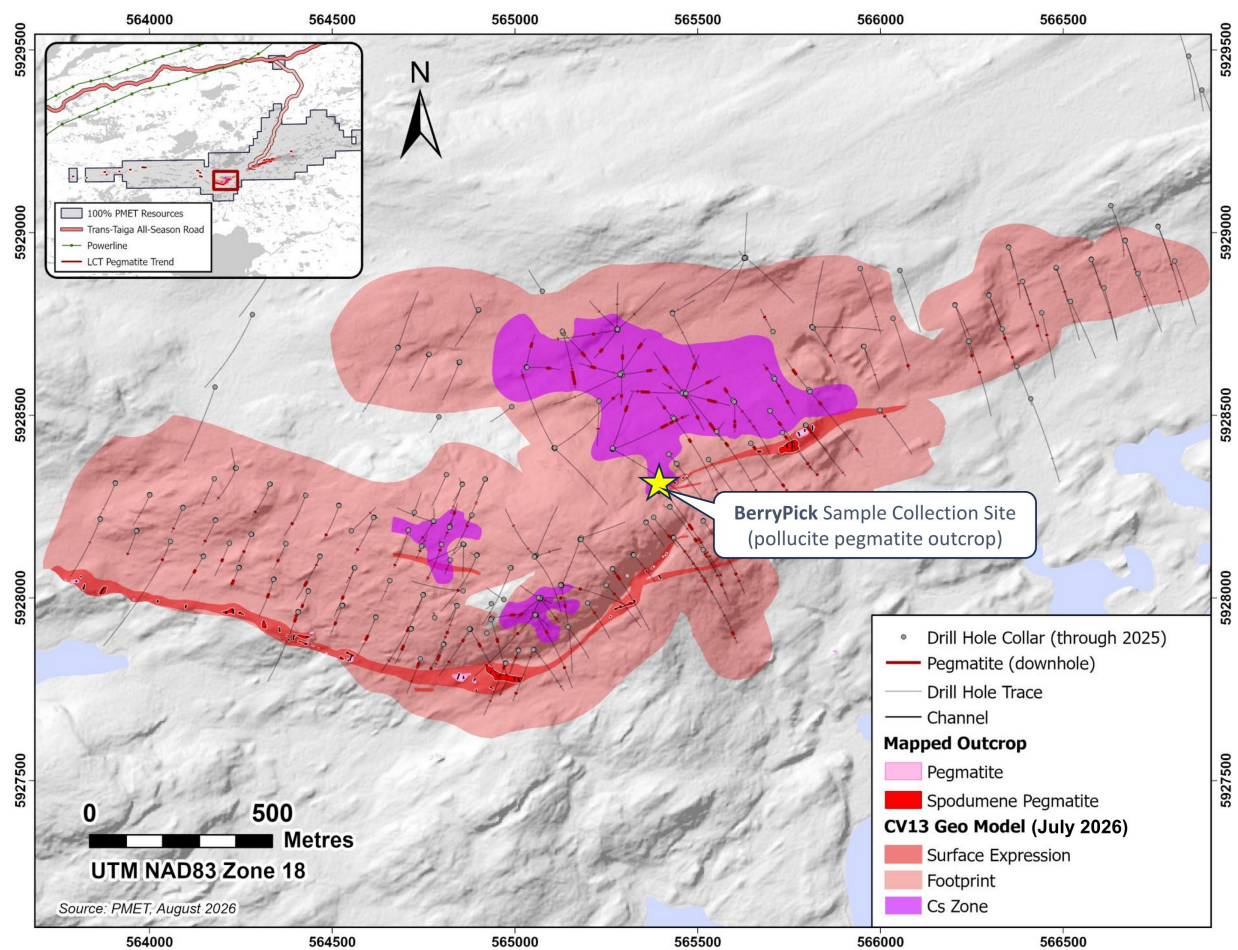


Figure 4: Principal pollucite pegmatite outcrop at the Vega Zone, CV13 Pegmatite (i.e., collection site for BerryPick).

In addition to being one of the largest lithium-tantalum pegmatite Mineral Resources¹ and lithium pegmatite Mineral Reserves² globally, the Property also hosts the world's largest in-situ pollucite-hosted caesium pegmatite Mineral Resource, comprising 0.69 Mt at 4.40% Cs₂O (Indicated) and 1.70 Mt at 2.40% Cs₂O (Inferred). The CV13 Pegmatite, host to the caesium Mineral Resource, is located <3 km along trend from the CV5 Pegmatite, which is situated approximately 13 km south of the regional Trans-Taiga Road and powerline infrastructure corridor, and is accessible year-round by road.

¹ Consolidated MRE (CV5 + CV13 pegmatites) totals 108.0 Mt at 1.40% Li₂O and 166 ppm Ta₂O₅ (Indicated), and 33.4 Mt at 1.33% Li₂O and 155 ppm Ta₂O₅ (Inferred), at an Li₂O cut-off grade of 0.40% (open-pit), 0.60% (underground CV5), and 0.70% (underground CV13). A grade constraint of 0.50% Cs₂O was used to model the Rigel and Vega caesium zones, contained entirely within CV13, with a MRE of 0.69 Mt at 4.40% Cs₂O (Indicated), and 1.70 Mt at 2.40% Cs₂O (Inferred). The Effective Date is June 20, 2025. Mineral Resources are not Mineral Reserves as they do not have demonstrated economic viability. Mineral Resources are inclusive of Mineral Reserves.

² Probable Mineral Reserve of 84.3 Mt at 1.26% Li₂O at the CV5 Pegmatite with a cut-off grade is 0.40% Li₂O (open-pit) and 0.70% Li₂O (underground). Underground development and open-pit marginal tonnage containing material above 0.37% Li₂O are also included in the statement. The Effective Date is September 11, 2025. See Feasibility Study news release dated October 20, 2025.

QUALIFIED/COMPETENT PERSON

The technical and scientific information in this news release that relates to the Mineral Resource Estimate, exploration, and metallurgical results (including BerryPick as described herein) for the Company's properties is based on, and fairly represents, information compiled by Mr. Darren L. Smith, M.Sc., P.Geo., who is a Qualified Person as defined by *National Instrument 43-101 – Standards of Disclosure for Mineral Projects* ("NI 43-101"), and member in good standing with the *Ordre des Géologues du Québec* (Geologist Permit number 01968), and with the Association of Professional Engineers and Geoscientists of Alberta (member number 87868). Mr. Smith has reviewed and approved the related technical information in this news release.

Mr. Smith is an Executive and Vice President of Exploration for PMET Resources Inc. and holds common shares, Restricted Share Units (RSUs), Performance Share Units (PSUs), and options in the Company.

Mr. Smith has sufficient experience, which is relevant to the style of mineralization, type of deposit under consideration, and to the activities being undertaken to qualify as a Competent Person as described by the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (the JORC Code). Mr. Smith consents to the inclusion in this news release of the matters based on his information in the form and context in which it appears.

The information in this news release that relates to the Mineral Reserve Estimate and Feasibility Study is based on, and fairly represents, information compiled by Mr. Frédéric Mercier-Langevin, Ing. M.Sc., who is a Qualified Person as defined by NI 43-101, and member in good standing with the *Ordre des Ingénieurs du Québec*. Mr. Mercier-Langevin has reviewed and approved the related technical information in this news release.

Mr. Mercier-Langevin is the Chief Operating and Development Officer for PMET Resources Inc. and holds common shares, RSUs, PSUs, and options in the Company.

ABOUT PMET RESOURCES INC.

PMET Resources Inc. is a pegmatite critical mineral exploration and development company focused on advancing its district-scale 100%-owned Shaakichiuwaanaan Property located in the Eeyou Istchee James Bay region of Quebec, Canada, which is accessible year-round by all-season road and proximal to regional hydro-power infrastructure.

In late 2025, the Company announced a positive lithium-only Feasibility Study on the CV5 Pegmatite for the Shaakichiuwaanaan Property and declared a maiden Mineral Reserve of 84.3 Mt at 1.26% Li₂O (Probable)³. The study outlines the potential for a competitive and globally significant high-grade lithium project targeting up to ~800 ktpa spodumene concentrate using a simple Dense Media Separation ("DMS") only process flowsheet. Further, the results highlight Shaakichiuwaanaan as a potential North American critical mineral powerhouse with significant opportunity for tantalum and caesium in addition to lithium.

³ See Feasibility Study news release dated October 20, 2025. Probable Mineral Reserve cut-off grade is 0.40% Li₂O (open-pit) and 0.70% Li₂O (underground). Underground development and open-pit marginal tonnage containing material above 0.37% Li₂O are also included in the statement. Effective Date of September 11, 2025.

The Project hosts a Consolidated Mineral Resource⁴ totalling 108.0 Mt at 1.40% Li₂O and 166 ppm Ta₂O₅ (Indicated) and 33.4 Mt at 1.33% Li₂O and 155 ppm Ta₂O₅ (Inferred), and ranks as a top ten lithium pegmatite globally in size. Additionally, the Project hosts the world's largest pollucite-hosted caesium pegmatite Mineral Resource at the Rigel and Vega zones with 0.69 Mt at 4.40% Cs₂O (Indicated), and 1.70 Mt at 2.40% Cs₂O (Inferred).

This news release has been approved by

“KEN BRINSDEN”

Kenneth Brinsden, President, CEO, & Managing Director

Olivier Caza-Lapointe

Head, Investor Relations

T: +1 (514) 913-5264

E: ocazalapointe@pmet.ca

DISCLAIMER FOR FORWARD-LOOKING INFORMATION

This news release contains “forward-looking statements” and “forward-looking information” within the meaning of applicable securities laws.

All statements, other than statements of present or historical facts, are forward-looking statements. Forward-looking statements involve known and unknown risks, uncertainties and assumptions and accordingly, actual results could differ materially from those expressed or implied in such statements. You are hence cautioned not to place undue reliance on forward-looking statements. Forward-looking statements are typically identified by words or expressions such as “supports”, “ongoing”, “continues”, “building”, “anticipated”, “advancing”, “objectives” or variations of such words or expressions and phrases or statements that certain actions, events or results “may”, “could”, “would”, “might” or “will” be taken, occur or be achieved.

Forward-looking statements include, but are not limited to, statements concerning the timing of certain activities mentioned in this press release, the savings expected from the current sampling methodology program as well as the ability to produce >500 kg to potentially >1 tonne of pollucite concentrate from the program.

Forward-looking statements are based upon certain assumptions and other important factors that, if untrue, could cause actual results to be materially different from future results expressed or implied by such statements. There can be no assurance that forward-looking statements will prove to be accurate. Key assumptions upon which the Company's forward-looking information is based include, without limitation, the ability to obtain the required financing to bring the Project to development, the ability to make discoveries, the potential of each of tantalum, lithium and caesium, that proposed exploration work on the Property and the results therefrom will continue as expected, the accuracy of reserve and resource estimates, the classification of resources and the assumptions on which the reserve and resource estimates are based, long-term demand for lithium (spodumene), tantalum (tantalite), and caesium (pollucite) supply, and that exploration

⁴ Consolidated MRE (CV5 + CV13 pegmatites) is reported at an Li₂O cut-off grade of 0.40% (open-pit), 0.60% (underground CV5), and 0.70% (underground CV13). A grade constraint of 0.50% Cs₂O was used to model the Rigel and Vega caesium zones, contained entirely within CV13. The Effective Date is June 20, 2025. Mineral Resources are not Mineral Reserves as they do not have demonstrated economic viability. Mineral Resources are inclusive of Mineral Reserves.

and development results continue to support management's current plans for the Property's development.

Forward-looking statements are also subject to risks and uncertainties facing the Company's business, any of which could have a material adverse effect on the Company's business, financial condition, results of operations and growth prospects. Readers should review the detailed risk discussion in the Company's most recent Annual Information Form filed on SEDAR+, for a fuller understanding of the risks and uncertainties that affect the Company's business and operations.

Although the Company believes its expectations are based upon reasonable assumptions and has attempted to identify important factors that could cause actual actions, events or results to differ materially from those described in forward-looking statements, there may be other factors that cause actions, events or results not to be as anticipated, estimated or intended. There can be no assurance that forward-looking information will prove to be accurate. If any of the risks or uncertainties mentioned above, which are not exhaustive, materialize, actual results may vary materially from those anticipated in the forward-looking statements.

The forward-looking statements contained herein are made only as of the date hereof. The Company disclaims any intention or obligation to update or revise any forward-looking statements, whether as a result of new information, future events or otherwise, except to the extent required by applicable law. The Company qualifies all of its forward-looking statements by these cautionary statements.

COMPETENT PERSON STATEMENT (ASX LISTING RULES)

The information in this news release that relates to the Feasibility Study ("FS") for the Shaakichiuwaanaan Project, which was first reported by the Company in a market announcement titled "*PMET Resources Delivers Positive CV5 Lithium-Only Feasibility Study for its Large-Scale Shaakichiuwaanaan Project*" dated October 20, 2025 (Montreal time) is available on the Company's website at www.pmet.ca, on SEDAR+ at www.sedarplus.ca and on the ASX website at www.asx.com.au. The production target from the Feasibility Study referred to in this news release was reported by the Company in accordance with ASX Listing Rule 5.16 on the date of the original announcement. The Company confirms that, as of the date of this news release, all material assumptions and technical parameters underpinning the production target in the original announcement continue to apply and have not materially changed.

The Mineral Resource and Mineral Reserve Estimates in this release were first reported by the Company in accordance with ASX Listing Rules 5.8 and 5.9 in market announcements titled "*World's Largest Pollucite-Hosted Caesium Pegmatite Deposit*" dated July 20, 2025 (Montreal time) and "*PMET Resources Delivers Positive CV5 Lithium-Only Feasibility Study for its Large-Scale Shaakichiuwaanaan Project*" dated October 20, 2025 (Montreal time) and are available on the Company's website at www.pmet.ca, on SEDAR+ at www.sedarplus.ca and on the ASX website at www.asx.com.au. The Company confirms that, as of the date of this news release, it is not aware of any new information or data verified by the competent person that materially affects the information included in the relevant announcement and that all material assumptions and technical parameters underpinning the estimates in the relevant announcement continue to apply and have not materially changed. The Company confirms that, as at the date of this announcement, the form and context in which the competent person's findings are presented have not been materially modified from the original market announcement.

APPENDIX I – JORC CODE 2012 TABLE I (ASX LISTING RULE 5.8.2)

Section I – Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialized industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralization that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverized to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralization types (eg submarine nodules) may warrant disclosure of detailed information.	Pollucite pegmatite samples are collected from outcrop at the Vega Zone using ~30 cm diameter, shallow (~30 cm) drill core holes. Samples are collected of in-situ material and target pollucite mineralization as indicated by visual assessment, portable XRF readings, and prior channel sample results.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Drilling is diamond drill, producing ~30 cm x 20-30 cm intervals of core for sampling.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximize sample recovery and ensure representative nature of the samples.	No RQD is completed with core collected as recovered.

Criteria	JORC Code explanation	Commentary
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	Drill cores are not formally logged with only estimated modal mineralogy assessed to guide compositing.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximize representivity of samples. - Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	Whole core pieces are collected and composited into bulk bags, targeted varying grade approximations as guided by visual assessment and portable XRF readings.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	N/A. No analysis has been completed.

Criteria	JORC Code explanation	Commentary
	Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	N/A. No drill results reported.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	N/A. No drill results reported.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	Objective is bulk composite sample collection of pollucite pegmatite from outcrop. Therefore, drill spacing is not a consideration apart from maximizing sample collection over targeted outcrop area.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	Objective is bulk composite sample collection of pollucite pegmatite from outcrop. Therefore, drill hole orientation is not a consideration.
Sample security	The measures taken to ensure sample security.	The composited sample(s) for testwork remain under the custody of the Company as they remain at site.

Criteria	JORC Code explanation	Commentary
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	- A review of the sample procedures for the Company's drill programs has been reviewed by several Qualified/Competent Persons through multiple NI 43-101 technical reports completed for the Company and deemed adequate and acceptable to industry best practices. The most recent Technical Report includes a review of sampling techniques and data through 2024 (drill hole CV24-787) in a technical report titled "CV5 Pegmatite Lithium-Only Feasibility Study NI 43-101 Technical Report, Shaakichiuwaanaan Project" with an Effective Date of October 20, 2025, and Issue Date of November 14, 2025. - Additionally, the Company continually reviews and evaluates its procedures in order to optimize and ensure compliance at all levels of sample data collection and handling.

Section 2 – Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The Shaakichiuwaanaan Property (formerly called "Corvette") is comprised of 463 Exclusive Exploration Rights ("EERs") located in the James Bay Region of Quebec, with Lithium Innova Inc. (wholly owned subsidiary of PMET Resources Inc.) being the registered title holder. The northern border of the Property's primary claim block is located within approximately 6 km to the south of the Trans-Taiga Road and powerline infrastructure corridor. The CV5 lithium-caesium-tantalum ("LCT") Pegmatite is accessible year-round by all-season road is situated approximately 13.5 km south of the regional and all-weather Trans-Taiga Road and powerline infrastructure. The CV13 LCT pegmatite is located <3 km west-southwest of CV5. The Vega Zone is located within the CV13 Pegmatite. - The Company holds 100% interest in the Property subject to various royalty obligations depending on original acquisition agreements. DG Resources Management holds a 2% NSR (no buyback) on 76 claims, D.B.A. Canadian Mining House holds a 2% NSR on 50 claims (half buyback for \$2M), OR Royalties holds a sliding scale NSR of 1.5-3.5% on precious metals, and 2% on all other products, over 111 claims, and Azimut Exploration holds 2% NSR on 39 claims. - The Property does not overlap any atypically sensitive

Criteria	JORC Code explanation	Commentary
		environmental areas or parks, or historical sites to the knowledge of the Company. There are no known hinderances to operating at the Property, apart from the goose harvesting season (typically mid-April to mid-May) where the communities request helicopter flying not be completed, and potentially wildfires depending on the season, scale, and location. • Claim expiry dates range from September 2026 to July 2028.
Exploration done by other parties	• Acknowledgment and appraisal of exploration by other parties.	• No previous exploration targeting LCT pegmatites has been conducted by other parties at the Project. • For a summary of previous exploration undertaken by other parties at the Project, please refer to the most recent NI 43-101 Technical Report.
Geology	• Deposit type, geological setting and style of mineralization.	• The Property overlies a large portion of the Lac Guyer Greenstone Belt, considered part of the larger La Grande River Greenstone Belt and is dominated by volcanic rocks metamorphosed to amphibolite facies. The claim block is dominantly host to rocks of the Guyer Group (amphibolite, iron formation, intermediate to mafic volcanics, peridotite, pyroxenite, komatiite, as well as felsic volcanics). The amphibolite rocks that trend east-west (generally steeply south dipping) through this region are bordered to the north by the Magin Formation (conglomerate and wacke) and to the south by an assemblage of tonalite, granodiorite, and diorite, in addition to metasediments of the Marbot Group (conglomerate, wacke). Several regional-scale Proterozoic gabbroic dykes also cut through portions of the Property (Lac Spirt Dykes, Senneterre Dykes). • The geological setting is prospective for multiple commodities over several different deposit styles including orogenic gold (Au), volcanogenic massive sulphide (Cu, Au, Ag), komatiite-ultramafic (Au, Ag, PGE, Ni, Cu, Co), and LCT pegmatite (Li, Cs, Ta, Ga, Rb). • Exploration of the Property has outlined three primary mineral exploration trends crossing dominantly east-west over large portions of the Property – Golden Trend (gold), Maven Trend (copper, gold, silver), and CV Trend (lithium, caesium, tantalum). The CV4, CV5, and CV13 pegmatites are situated within the CV Trend. • The pegmatites at Shaakichiuwaanaan are categorized as Li-Cs-Ta (“LCT”) pegmatites. LCT mineralization at the Property is observed to occur within quartz-feldspar pegmatite. The pegmatite is often very coarse-

Criteria	JORC Code explanation	Commentary
		grained and off-white in appearance, with darker sections commonly composed of mica and smoky quartz, and occasional tourmaline. Core assays and ongoing mineralogical studies, coupled with field mineral identification and assays confirm spodumene as the dominant lithium-bearing mineral on the Property, with no significant petalite, lepidolite, lithium-phosphate minerals, or apatite present. The spodumene crystal size of the pegmatites is typically decimeter scale, and therefore, very large. The pegmatites also carry significant tantalum (tantalite) and caesium (pollucite). Gallium is present in spodumene and feldspar via substitution with Al.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	Objective is bulk composite sample collection of pollucite pegmatite from outcrop. Therefore, drill hole attributes are not of importance, but rather a means of collection.
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations	N/A. No drill results reported.

Criteria	JORC Code explanation	Commentary
	should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	
Relationship between mineralization widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralization with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	N/A. No drill results reported.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Please refer to the figures included herein as well as those posted on the Company's website.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Reporting is balanced.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	- The Company is currently completing site environmental work over the CV5 and CV13 pegmatite area. No endangered flora or fauna have been documented over the Property to date, and several sites have been identified as potentially suitable for mine infrastructure. - The Company has completed a bathymetric survey over the shallow glacial lake which overlies a portion of the CV5 Spodumene Pegmatite. The lake depth ranges from <2 m to approximately 18 m, although the majority of the CV5 Spodumene Pegmatite, as delineated to date, is overlain by typically <2 to 10 m of water. - The Company has completed significant metallurgical testing comprised of HLS, DMS, and magnetic testing, which has produced 5.5+% Li₂O spodumene concentrates at >70% recovery on both CV5 and CV13 pegmatite material. DMS pilots on CV5 Pegmatite material (collectively totaling >10 tonnes), including

Criteria	JORC Code explanation	Commentary
		with non-pegmatite dilution, produced spodumene concentrates ranging in grade from 5.6% to 6.6% Li_2O and recovery from 69% to 89% results, confirming a DMS-only flowsheet is applicable. • The Company has also produced a marketable lithium hydroxide concentrate from CV5's spodumene concentrate. • The Company has produced marketable tantalite concentrates at bench-scale from the CV5 Pegmatite's DMS (spodumene) tailings fractions. The testwork used gravity or gravity + flotation methods to produce tantalite concentrates grading 8.7% Ta_2O_5 at 45% global recovery (MC001) and 6.6% Ta_2O_5 at 49% global recovery (MC002). • The Company has produced marketable pollucite concentrates at bench-scale from the CV13 Pegmatite's Vega Caesium Zone. The testwork used XRT ore sorting to produce concentrates of 11.5% Cs_2O and 20.0% Cs_2O at an overall 88% recovery. • The Company has demonstrated efficient extraction of caesium from pollucite concentrates (12% Cs_2O) with >97% recovery. • Various mandates required for advancing the Project have been completed or are ongoing, including but not limited to, environmental baseline, metallurgy, geomechanics, hydrogeology, hydrology, stakeholder engagement, geochemical characterization, as well as transportation and logistical studies. A Feasibility Study for lithium-only on the CV5 Pegmatite was announced October 20, 2025.
Further work	• The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	• The Company intends to continue drilling the pegmatites of the Shaakichiuwaanaan Property, primarily targetting lithium, caesium, and tantalum as the primary commodities of interest. This is anticipated to include step-out and infill drilling. • Further drilling is anticipated to support the development of the CV5 and CV13 pegmatites (i.e., resource, geotechnical, geomechanical, and hydrogeological). • Metallurgical test programs evaluating the recovery of lithium, caesium, and tantalum are ongoing. • Surface prospecting, rock sampling, and mapping is planned to continue across the Property focused on LCT pegmatite.

