



Oakajee Corporation Limited

ACN 123 084 453

Registered Office

39 Clifton Street

NEDLANDS WA 6009

Telephone: +61 8 9389 6032

Facsimile: +61 8 9389 8226

28 September 2026

Company Announcements Office
ASX Limited

PAYNES FIND GOLD PROJECT AIRCORE DRILLING RESULTS

- 38 AC drill holes were completed for 1,928m to follow up previous AC drilling that intersected anomalous gold.
- The program identified a potential north-west gold mineralised trend over 1,000m and remains open along strike in both directions.
- Best results are 464ppb Au from the end of drill-hole PFAC 149 and 305ppb Au in PFAC 168.
- The gold mineralised zone is concealed under laterite gravels and lake clays.

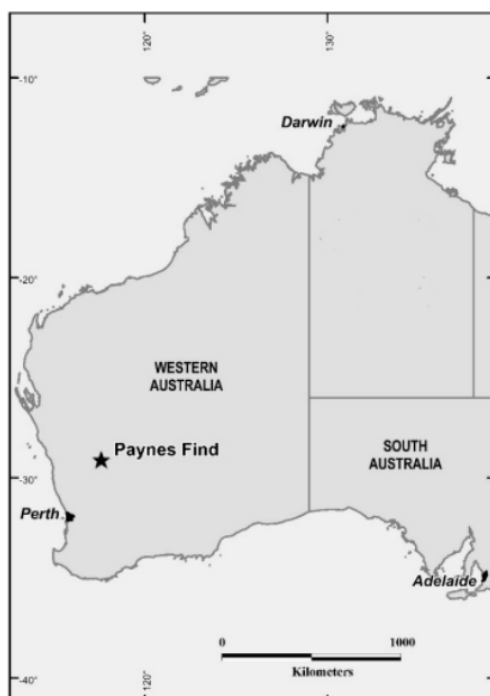


Figure 1 – Paynes Find Gold Project location.

Oakajee Corporation Ltd (“**Oakajee**” or “**the Company**”) is pleased to advise that assay results of the Aircore (AC) drilling completed in August 2026 at the Paynes Find Gold Project in Western Australia have been received. A total of 38 drill holes were completed to follow up and extend previously intersected gold mineralisation at the Paynes Find South target (ASX Announcements 19 February 2024 and 6 October 2025). The program has revealed a gold mineralised zone trending NNW for 1,000m strike. This zone is along a NNW trending magnetic structure concealed beneath about 20m of lake clay and laterite gravel. The mineralisation is currently open along strike to the NW and SE (Figures 2).

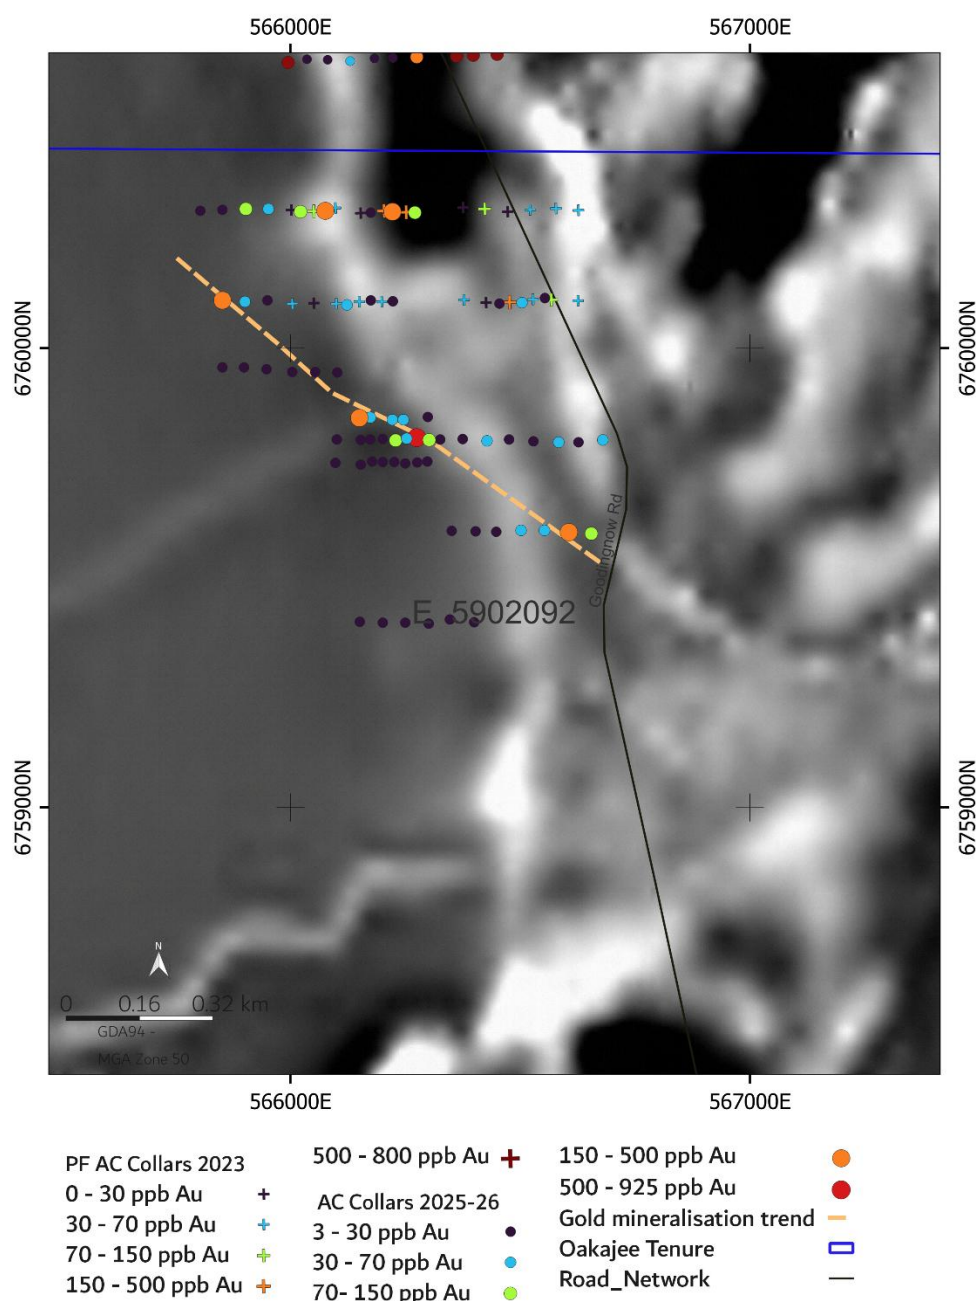


Figure 2 – AC drill-hole collars coloured by maximum gold results over magnetic Image-tmirtp1vd.

A total of 38 drill holes (Table 2) were completed for 1,928m to follow up previous AC drilling that intersected anomalous gold (Figure 2).

Drilling was on 50m to 200m spaced lines with drill collars along the lines spaced 50m or 25m apart. All the drillholes were angled at -60 degrees to the east and drilled to blade refusal.

The best results from the current drilling are 464 ppb Au from the end of hole (PFAC149) and 305ppb Au (36-40m) in PFAC168. PFAC149 was drilled 130m NW of a previous drill intersection of 925ppb Au (PFAC122 36-40m) and PFAC168 was drilled a further 390m to the NW. These results together with previous result of 326ppb Au from 24-28m (PFAC125) located 400m to the SE suggest a probable NW trend over about 1,000m. This trend is currently open to the NW and SE. The gold mineralisation is hosted in basalts and gabbro associated with variable shearing and quartz veinlets concealed below up to 20m of lake clay and laterite gravel.

Table 1: AC Drillholes Best Gold Results (>100ppbAu)

Hole ID	MGA_E	MGA_N	From(m)	To(m)	Interval (m)	Gold (ppb)
PFAC131	566302	6759800	28	32	4	114
PFAC149	566174	6759849	64	65(Eoh)	1	464
PFAC163	565903	6760303	48	52	4	123
PFAC168	565852	6760104	36	40	4	305

Table 2: AC Drillhole Collars

Hole ID	MGA_E	MGA_N	RL	Depth	Dip	Azimuth
PFAC131	566302	6759800	328	54	-60	90
PFAC132	566253	6759803	328	54	-60	90
PFAC133	566201	6759802	333	54	-60	90
PFAC134	566174	6759801	335	44	-60	90
PFAC135	566153	6759800	331	45	-60	90
PFAC136	566101	6759801	331	39	-60	90
PFAC137	566298	6759753	326	44	-60	90
PFAC138	566276	6759751	326	50	-60	90
PFAC139	566250	6759749	333	46	-60	90
PFAC140	566226	6759752	333	47	-60	90
PFAC141	566201	6759752	333	44	-60	90
PFAC142	566178	6759753	331	43	-60	90
PFAC143	566153	6759746	330	42	-60	90
PFAC144	566098	6759750	331	37	-60	90
PFAC145	566299	6759850	329	61	-60	90
PFAC146	566246	6759844	332	40	-60	90
PFAC147	566222	6759844	333	46	-60	90
PFAC148	566174	6759849	333	57	-60	90
PFAC149	566150	6759848	328	65	-60	90
PFAC150	566102	6759947	338	45	-60	90
PFAC151	566054	6759948	333	69	-60	90
PFAC152	566004	6759948	332	60	-60	90
PFAC153	565948	6759954	333	58	-60	90
PFAC154	565899	6759958	329	66	-60	90
PFAC155	565852	6759958	328	72	-60	90
PFAC156	566301	6759400	333	92	-60	90

PFAC157	566250	6759402	335	53	-60	90
PFAC158	566201	6759402	338	40	-60	90
PFAC159	566151	6759404	338	26	-60	90
PFAC160	566400	6759403	335	70	-60	90
PFAC161	566347	6759409	328	31	-60	90
PFAC162	565952	6760303	337	52	-60	90
PFAC163	565903	6760303	336	67	-60	90
PFAC164	565852	6760301	337	42	-60	90
PFAC165	565804	6760299	337	39	-60	90
PFAC166	565950	6760104	334	56	-60	90
PFAC167	565901	6760101	336	39	-60	90
PFAC168	565852	6760104	336	53	-60	90

For Investor queries, please contact:

Mark Jones
Managing Director
+61 419 919 250

COMPLIANCE STATEMENT

The information in this report that relates to Exploration Results is based on information compiled by Mr Reginald Beaton who is a Member of the Australian Institute of Geoscientists. Mr Beaton is an employee of Oakajee Corporation Limited and has sufficient experience which is relevant to the style of mineralisation under consideration to qualify as a Competent Person as defined in the 2012 Edition of the 'Australian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Beaton consents to the inclusion in the report of the matters based on the information compiled by him, in the form and context in which it appears.

1. JORC CODE, 2012 EDITION – TABLE 1 REPORT TEMPLATE

1.1 Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
<i>Sampling techniques</i>	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	- Air Core (AC) drilling was undertaken to provide the representative samples. - Samples were collected in buckets from every 1m of drilling via a cyclone mounted on the drill rig. The 1m drill samples were laid out on the ground next to the rig. Composite samples were then collected over a 4m interval using an aluminum scoop. Each sample of about 2-3kgs was stored in a pre-numbered calico bag. - All the 4m composite samples were submitted to a Laboratory to be crushed, pulverised and assayed.
<i>Drilling techniques</i>	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	The drilling method was industry standard AC blade. The drilling was completed by Harnec Pty Ltd using a track mounted rig.
<i>Drill sample recovery</i>	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- A visual assessment of the sample recovery was completed by the Supervising Geologist. The sample recovery is considered adequate for this early stage of exploration. - Standard AC drilling practice was used to ensure maximum sample recoveries. - For this early stage of exploration there is no study of the sample bias relationships.

Criteria	JORC Code explanation	Commentary
<i>Logging</i>	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i>	- AC drill chips were logged on site by a Geologist sufficiently experience in the geological terrain being explored. A standard logging system was used to record sample recovery, weathering, lithology, mineralisation and alteration. - Logging is qualitative in nature, and each hole was logged to its complete depth. - The bottom of hole chips were washed and stored in chip trays for reference.
<i>Sub-sampling techniques and sample preparation</i>	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	- Drill cuttings were collected in buckets for every 1m of drilling and laid out on the ground in rows of 10 for sampling and logging. A 2-3kg composite 4m sample was then collected from the 1m chip piles with an aluminum scoop and stored in a pre-numbered calico bag. - For this early-stage exploration, the sampling technique is considered appropriate to determine the presents of mineralisation. - A field duplicate sample was collected for every 50 samples, and a Certified standard sample was also inserted for every 50 samples. - The sample size is considered sufficient to determine the presence or absence of mineralisation.
<i>Quality of assay data and laboratory tests</i>	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	- Samples were submitted to Bureau Veritas Minerals Pty Ltd 58 Sorbonne Crescent Canning Vale WA. - Standard sample preparation and assay techniques were used. - The samples were digested with Aqua Regia with Au, Ag, As, Bi, Mo, Pb, Sb, W, determined by Inductively Coupled Plasma (ICP) Mass Spectrometry. Co, Cu, Zn were determined by Inductively Coupled plasma (ICP) Optical Emission Spectrometry. - OKJ submitted duplicate and standard samples with each batch. The laboratory monitors QC via repeats and certified standard samples.

Criteria	JORC Code explanation	Commentary
<i>Verification of sampling and assaying</i>	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	- No twinned holes completed. - Logging and sample were recorded on standard sample and logging sheets and then entered in the OKJ digital spreadsheets.
<i>Location of data points</i>	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	- Hand-held GPS was used to locate the drill holes collars. - The Grid system is GDA94 Z50. - The terrain is flat and topographic control was provided by government topographic maps.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	- The AC drill lines are spaced 50m to 200m apart. Drill hole spacing along the lines is 25m for infill and 50m for first pass work. This is considered appropriate for the early-stage nature of the drilling. - The drill spacing is not sufficient to establish either grade or continuity of the mineralisation. - No data compositing has been applied.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	- The AC drill lines are approximately perpendicular to regional geology, and the current drilling suggests a NW orientation for mineralisation. - Drill holes were orientated at -60 to 090 to test for west dipping mineralised zones. The drill hole orientation is considered appropriate based on the known geometry of the gold mineralised zones in the Paynes Find gold camp immediately north of the OKJ Tenements. Insufficient data is available to determine if the orientation has resulted in a sample bias.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	OKJ personnel supervised the drilling, sampling, and transport to the laboratory in Perth.
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits or reviews completed.

1.2 Section 2 Reporting Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- No National Parks. No Native Title. - Current Pastoral Leases. - Oakajee Exploration Pty Ltd 80% of M59/549, P59/2075, P59/2083. - Oakajee Exploration Pty Ltd 80% of E59/2092 excluding Lithium. - The tenements are in good standing and no known impediments exist.
<i>Exploration done by other parties</i>	Acknowledgment and appraisal of exploration by other parties.	Considerable past piecemeal exploration was completed, including surface geochemistry and RAB drilling by Finders Gold 1988-1990 WAMEX reports A26228 & 26227, Cervantes Corp Ltd WAMEX A123849, A122599, 2019.
<i>Geology</i>	Deposit type, geological setting and style of mineralisation.	Shear/ fault hosted quartz vein and stock work gold mineralisation.
<i>Drill hole Information</i>	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	A list of all the AC drilling completed is provided in this report.

Criteria	JORC Code explanation	Commentary
<i>Data aggregation methods</i>	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Significant gold results are reported as above 100ppb Au. No cutting of high grades was done, and no weighted averaging was completed.
<i>Relationship between mineralisation widths and intercept lengths</i>	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. down hole length, true width not known).</i>	The geometry of the mineralisation reported is poorly constrained. Elsewhere in the Paynes Find district mineralised quartz veins strike north to north-west and dip to the west. High grade gold mineralisation in the quartz veins has short strikes and a steep plunge.
<i>Diagrams</i>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Appropriate diagrams summarising key data interpretations are included in the body of this announcement.
<i>Balanced reporting</i>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	The interpretations expressed in the announcement are not considered to be overstated or misleading.
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	- All relevant data has been included within the report. - Refer to exploration by other parties for relevant previous exploration.

Criteria	JORC Code explanation	Commentary
<i>Further work</i>	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	- A range of techniques will be considered to progress exploration including further AC drilling. - Refer to Figures in the body of this announcement.