

30 September 2026

ASX ANNOUNCEMENT

Broad Gold Drill Intercept at Paquin Prospect, Bousquet Project

Highlights

- Final assays have been received for Phase 3 drilling at the Bousquet Gold Project, including the following significant intersections from the Paquin Prospect:
 - 11.0m @ 1.43 g/t Au from 174.0m (BO-26-68)
 - 6.1m @ 1.01 g/t Au from 54.0m (BO-26-70)
 - 3.5m @ 1.15 g/t Au from 187.5m (BO-26-69)
- High grade intercepts in BO-26-67 (previously reported¹):
 - 5.0m @ 4.54 g/t Au from 171.0m
 - Inc. 0.75m @ 24.3 g/t Au from 173.5m
- Results confirm the current modelling of the gold mineralisation at Paquin which remains open down plunge, down dip and to the west
- 1.3km mineralised strike confirmed at Paquin/Amadee system with a further ~1.5km open to the west
- Less than 20% of the Bousquet Project has been explored with several regional targets yet to be tested
- Bousquet Project covers 10km of a 28km stretch of the Southern Abitibi Greenstone belt that hosts over 28Moz of gold (Figure 4)
- Bousquet Gold Project is located on Cadillac Break in Quebec, Canada, a regional structure associated with world-class gold mines (>110 Moz Auⁱ)
- Situated within 15km of multi-million-ounce working gold mines (Agnico Eagle's La Ronde - 15.8Moz Auⁱⁱ and IAMGOLD's Westwood - 2.4Moz Auⁱⁱⁱ)

Olympio's Managing Director, Sean Delaney, commented:

"Our drilling success at the Bousquet Gold Project continues with results from the last four holes of the program delivering broad gold intercepts including 11m @ 1.43 g/t gold in hole BO-26-68. Our drilling has produced significant gold intercepts in 39 out of 43 holes drilled at Bousquet

¹ OLY ASX Announcement 3 August 2026 - 24.3g/t Au Intercept From First Assays - Phase 3 Drilling

since we acquired the project last year, which continues to give us confidence that we are in a large mineralised system.

“The Paquin/Amadee trend has 1.3km of strike and has only been tested to a depth of ~157m with a further ~1.5km of strike of the main conglomerate contact open to the west, which demonstrates the tremendous upside for further discovery. We have a further 1.7km mineralised Decoeur trend to the south of the main conglomerate giving us further upside potential on what is likely to be one of the world’s best addresses for gold exploration.”

Olympio Metals Limited (ASX:OLY) (Olympio or the Company) is pleased to announce the final assay results from the Phase 3 drill program at the Bousquet Gold Project in Quebec, Canada.

Further thick gold mineralisation has been intersected along strike at Paquin, with BO-26-68 intersecting **11.0m @ 1.43 g/t Au from 174.0m**. This intercept is ~40m along strike from the bonanza intercept **19.4m @ 17.29 g/t Au from 179.2m in BO-26-63** (see announcement 31 March 2026) and ~20m down dip from the high-grade intercept in BO-26-67 of **5.0m @ 4.54 g/t Au from 171.0m** including **0.75m @ 24.3 g/t Au from 173.5m¹**.

The Phase 3 drill program comprised 5 diamond drill holes for a total of 1,428m targeting the Paquin prospect and was designed to test the strike orientation. The mineralisation at Paquin remains open along strike, down dip and down plunge.

Table 1: Significant gold intersections (downhole) from the Phase 3 drill program at the Bousquet Project ($\geq 0.5\text{g/t Au}$ cut-off, 1m min. width, 2m max. internal dilution (downhole)) (see Table 3 for detailed results)

Hole ID	From (m)	Width (m)	Au Grade (g/t)	Significant Intercept
BO-26-67	171.0	5.0	4.54	5.0m @ 4.54 g/t Au from 171.0m
includes	173.5	0.75	24.3	0.75m @ 24.30 g/t Au from 173.5m
BO-26-67	208.7	1.85	2.17	1.85m @ 2.17 g/t Au from 208.7m
BO-26-68	174.0	11.0	1.43	11.0m @ 1.43 g/t Au from 174.0m
BO-26-69	175.5	4.5	0.93	4.5m @ 0.93 g/t Au from 175.5m
BO-26-69	187.5	3.5	1.15	3.5m @ 1.15 g/t Au from 187.5m
BO-26-70	54.0	6.1	1.01	6.1m @ 1.01 g/t Au from 54.0m

The drilling results from this program demonstrate continued success from the Company’s three drilling programs at Bousquet since early 2025 and increase confidence that this is a large mineralised system. The Bousquet Project covers ~10km of a ~28km trend in the southern Abitibi Greenstone Belt that hosts over 28Moz of gold (Figure 4). To date, two main styles of gold mineralisation have been identified within the project.

The first is a structurally controlled 1.3km mineralisation trend, associated with soft sediment deformation at Paquin/Amadee. This trend is open to the west for a further ~1.5km along the conglomerate contact (Figure 3), which is a priority target area.

The second is a 1.7km shear-hosted mineralisation trend, associated with ultramafic units at Decoeur (Figure 3). Drilling at Decoeur in 2025 produced a broad gold intercept of **14.50m @ 1.96 g/t Au from 355.50m²**. This trend is open along strike for a further ~1km.

The Bousquet Project also hosts many other regional targets, with other mineralisation styles. The first three drill programs have focused only on these two mineralisation styles, covering ~20% of the Bousquet Project. The Company will continue to develop the strike and depth extension potential of the mineralisation styles discovered so far and is advancing drilling approvals to conduct preliminary drill testing on targets across the Bousquet Project.

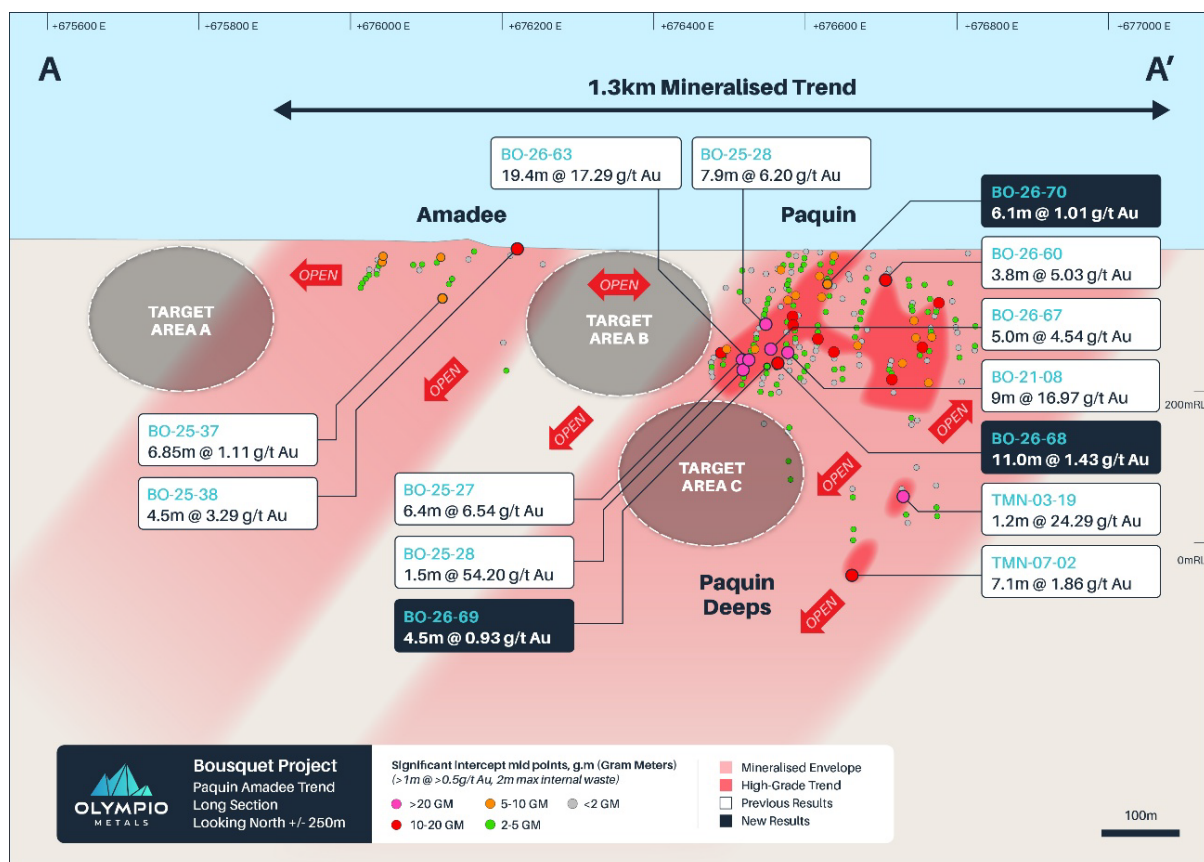


Figure 1: Paquin - Amadee long section (looking north) showing significant gold drill intersections (significant intercepts: ≥1m downhole @ ≥0.5g/t Au, max 2m internal waste).

² OLY ASX Announcement 26 August 2025 - Bousquet Gold Drilling Success at Decoeur

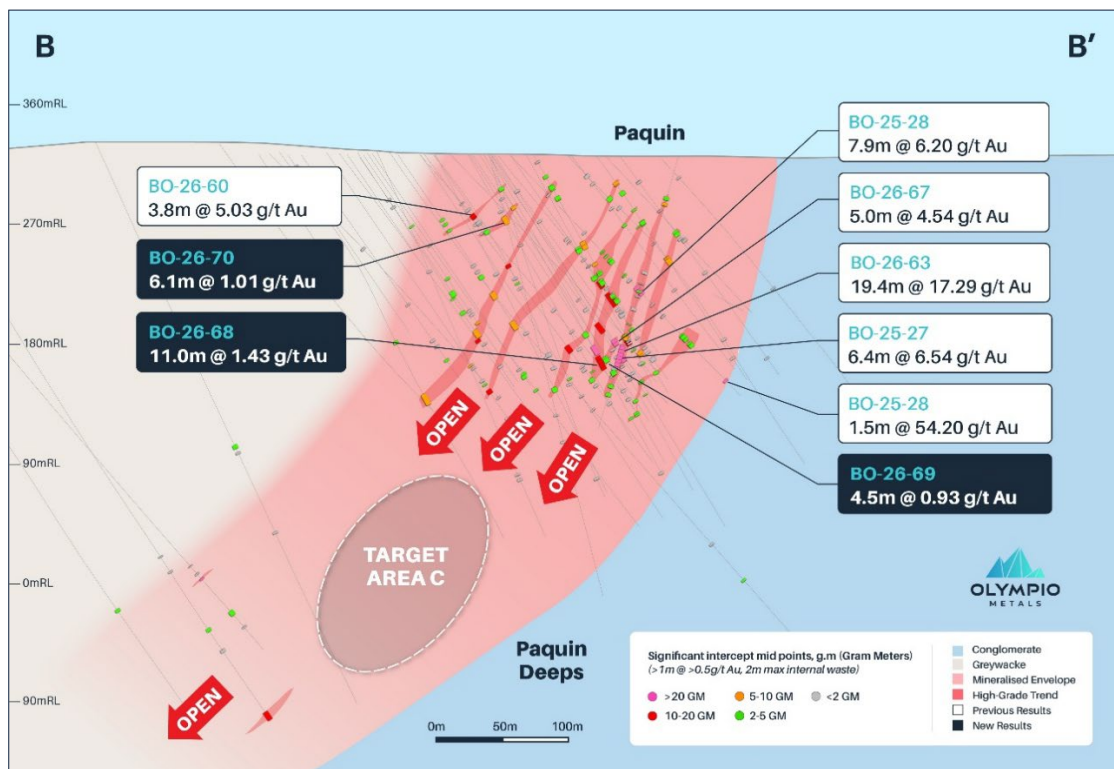


Figure 2: Paquin cross section (looking southeast +/-250m) showing significant gold drill intersections (significant intercepts: $\geq 1\text{m}$ downhole @ $\geq 0.5\text{g/t Au}$, max 2m internal waste).

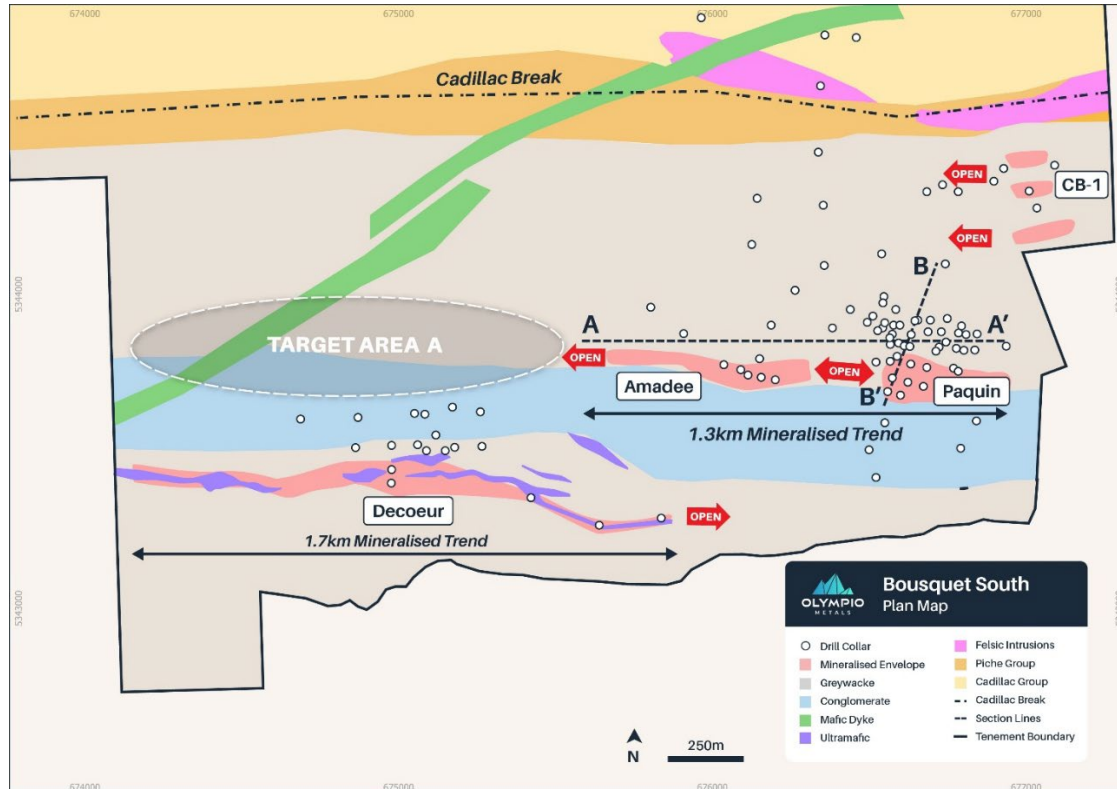


Figure 3: Plan view map of the Bousquet South area with the 5 main prospects of the Bousquet Project and showing Target Area A with an untested extension of the conglomerate contact.

Bousquet Geology

All three phases of drilling completed by Olympio to date have intersected high-grade gold mineralisation at Paquin (Table 3), including high-grade intercepts containing visible gold such as **19.4m @ 17.29 g/t Au from 179.2m in BO-26-63³** and **6.40m @ 6.54 g/t Au from 183.0m in BO-25-27⁴**. The Company believes these high-grade intercepts are influenced by deposit-scale structures at Paquin that strike at ~300°, at an angle to the main trend between Paquin and Amadee which strikes at ~270°. Understanding this ~30° offset will help guide down-plunge extensional drilling in Target Area C (Figure 1).

The gold mineralisation at Paquin and Amadee has a strong correlation with the Timiskaming Group sediments, focused at the transitional contact of greywacke and other soft sediment units, compressed against an interbedded sequence of conglomerate and other siliciclastic units. The soft sediments have been tightly folded and formed deposit-scale fluid traps, capable of producing bonanza grade intercepts such as **19.4m @ 17.29 g/t Au from 179.2m in BO-26-63³**. The down-plunge continuity and potential for additional high-grade structures offer significant upside along the Paquin/Amadee trend.

The transitional contact between the soft sediments and siliciclastic sediments has been modelled within the Bousquet Project for an additional 1.5km to the west of Amadee (Target Area A) and represents a high priority target for extensional drilling^{iv}.

The Paquin and Amadee prospects have been given different prospect names due to a ~300m “gap” between the two prospects. However, this area has only seen minimal drilling from the 1940s and has been highlighted as Target Area B as it is considered highly probable that the gold mineralisation continues through this zone (Figure 1). To date, the Amadee prospect has also only been tested to 85m vertical, whilst the Paquin prospect has been tested to ~157m vertical.

The Company's next phase of drilling will be aimed at progressing towards a potential maiden resource at Paquin and strike extension to the west of Paquin (Target Area B, Figure 1) and testing the additional 1.5km of untested strike along the conglomerate contact (Target Area A) (Figure 1). The down-plunge potential in Target Area C (Figure 2) provides significant upside for extension of the Paquin mineralisation.

Olympio has earned a 51% interest in the Bousquet Gold Project in Quebec from Bullion Gold Resources (Bullion) by meeting commitments for exploration expenditure and option payments. The remaining commitments to earn 80% are C\$500k option payments and C\$250k worth of shares plus C\$1m expenditure over five years, with flexibility for Olympio to accelerate these commitments. Bullion will retain a 20% undivided interest (net carried interest) in this project.

³ OLY ASX Announcement 31 March 2026 - 19.4m @ 17.29g/t Gold Intercept in Hole BO-26-63 at Bousquet

⁴ OLY ASX Announcement 28 July 2026 - High Grade Gold up to 42.3g/t Confirmed in First Drill Holes

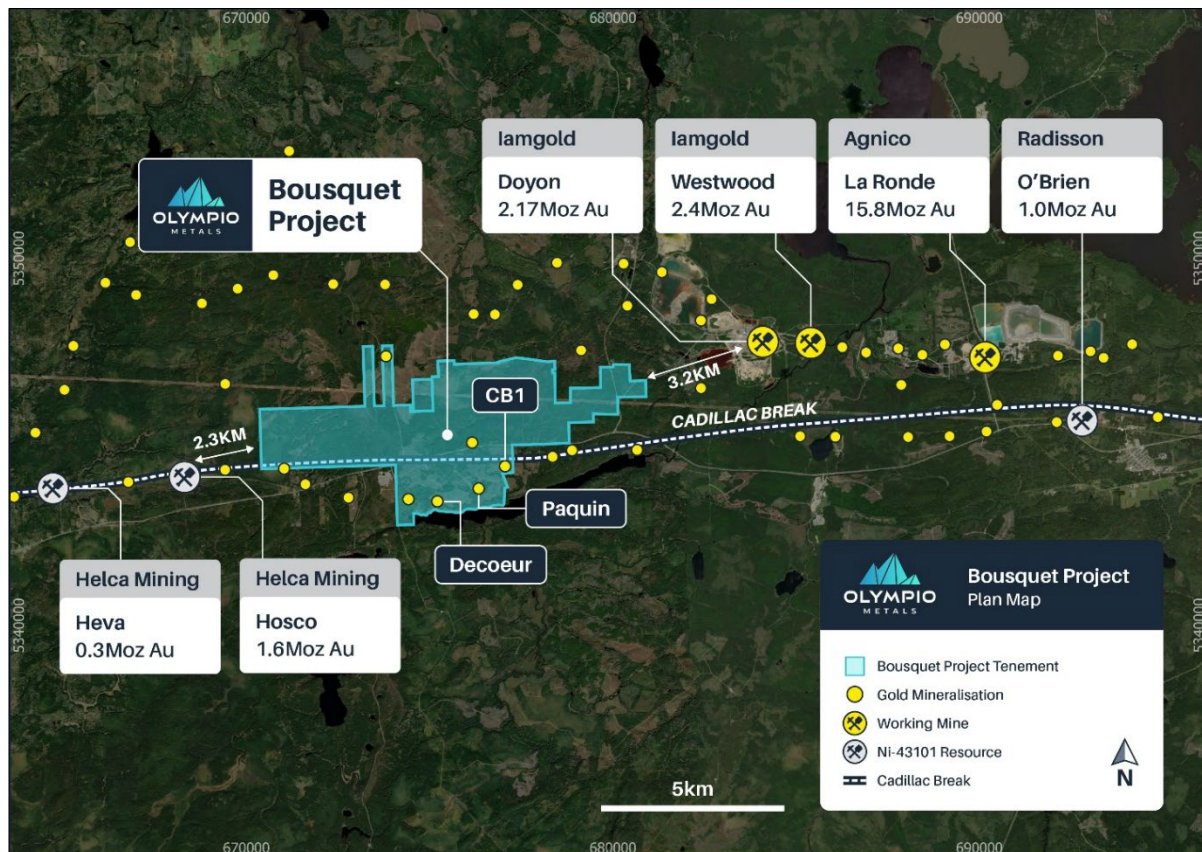


Figure 4: Setting of the Bousquet Gold Project relative to working mines and mineral resources along the Cadillac Break.

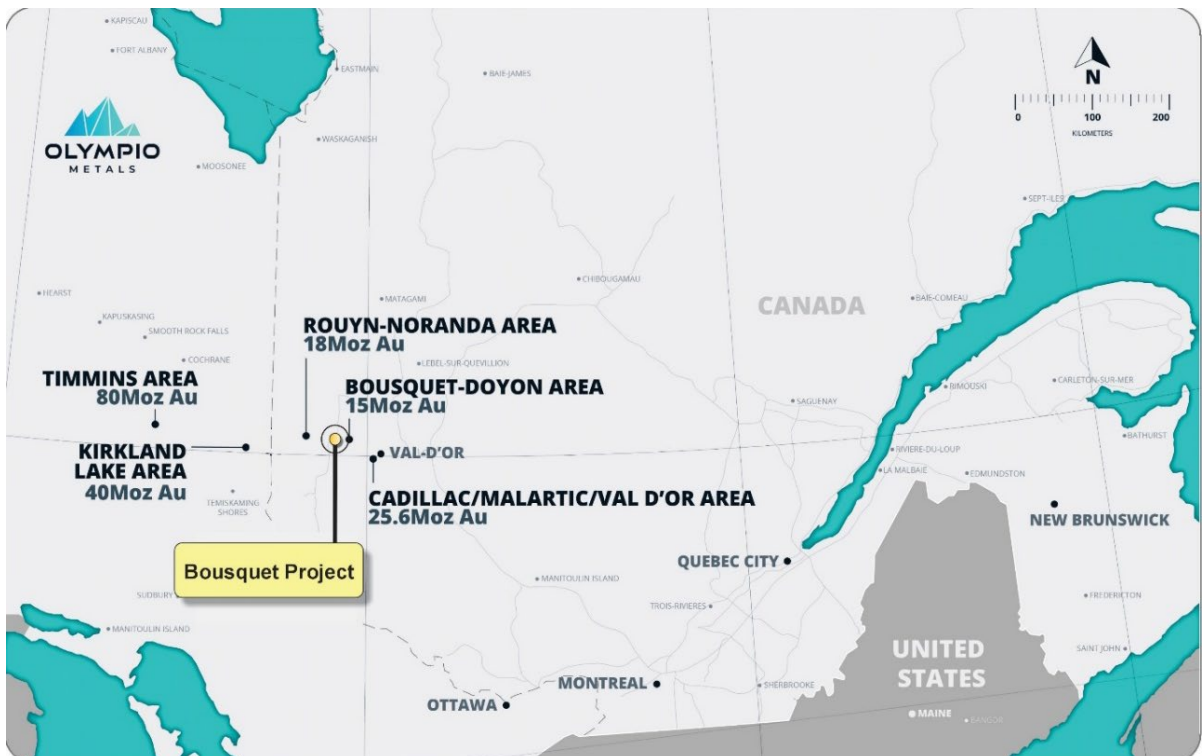


Figure 5: Bousquet Project Location.

- ENDS -

This announcement is approved by the Board of Olympio Metals Limited.

For further information:

Sean Delaney

Managing Director

T: +61 409 084 771

E: sdelaney@olympiometals.com.au

Jason Mack

White Noise Communications

T: +61 400 643 799

E: jason@whitenoisecomms.com

Competent Person's Statement

The information in this announcement that relates to exploration results is based on information reviewed by Mr. Mike Atkinson, a Competent Person who is a Member of the Australian Institute of Geoscientists and a consultant to Olympio Metals Limited. Mr. Atkinson has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Atkinson consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements referred to in this announcement (including results for BO-26-67, BO-26-63, BO-25-27 and BO-25-40) and, in the case of exploration results, that all material assumptions and technical parameters underpinning the results in those announcements continue to apply and have not materially changed.

Forward Looking Statements

This announcement may contain certain "forward looking statements" which may not have been based solely on historical facts, but rather may be based on the Company's current expectations about future events and results. Where the Company expresses or implies an expectation or belief as to future events or results, such expectation or belief is expressed in good faith and believed to have a reasonable basis.

However, forward looking statements are subject to risks, uncertainties, assumptions, and other factors which could cause actual results to differ materially from future results expressed, projected or implied by such forward looking statements. Such risks include, but are not limited to exploration risk, Mineral Resource risk, metal price volatility, currency fluctuations, increased production costs and variances in ore grade or recovery rates from those assumed in mining plans, as well as political and operational risks in the countries and states in which we sell our product to, and government regulation and judicial outcomes.

Readers should not place undue reliance on forward looking information. The Company does not undertake any obligation to release publicly any revisions to any "forward looking statement" to reflect events or circumstances after the date of this announcement, or to reflect the occurrence of unanticipated events, except as may be required under applicable securities laws.

The Company notes that any references in this announcement to exploration results, Mineral Resources, mineralisation, mines or deposits located on neighbouring or nearby properties are provided for contextual and illustrative purposes only. There is no assurance that geological

continuity exists between such properties and the Company's tenements. Mineralisation hosted on adjacent, nearby or geologically analogous properties is not necessarily indicative of mineralisation on the Company's tenements, and investors should not rely on such information as an indication of the potential for mineralisation or Mineral Resources within the Company's project areas.

BOARD OF DIRECTORS

Sean Delaney, *Managing Director*
Simon Andrew, *Non-Executive Chairman*
Aidan Platel, *Non-Executive Director*

COMPANY SECRETARY

Peter Gray

ISSUED CAPITAL

Ordinary Shares: 236 million

REGISTERED OFFICE

L2, 25 Richardson Street
West Perth, WA, 6005

Table 2: Collar information for completed drill holes from Olympio drill programs at the Bousquet Project (*Current announcement highlighted green*)

Hole	Prospect/Target	Azimuth	Dip	Length	Easting	Northing	Elevation	Status
BO-25-27	Paquin	188	-55	336	676528	5343882	324	28 th Jul 2025
BO-25-28	Paquin	205	-45	252	676568	5343839	322	28 th Jul 2025
BO-25-29	Paquin	195	-55	300	676496	5343909	324	12 th Aug 2025
BO-25-31	Amadee	220	-45	87	676115	5343741	336	12 th Aug 2025
BO-25-32	Amadee	230	-45	102	676092	5343758	334	12 th Aug 2025
BO-25-33	Amadee	210	-45	102	676092	5343758	334	12 th Aug 2025
BO-25-34	Amadee	210	-45	102	676038	5343774	336	12 th Aug 2025
BO-25-35	Amadee	230	-45	102	676038	5343774	336	12 th Aug 2025
BO-25-36	Amadee	220	-45	90	676157	5343734	334	12 th Aug 2025
BO-25-37	Amadee	220	-45	222	676152	5343793	340	12 th Aug 2025
BO-25-38	Amadee	230	-45	102	676202	5343726	324	12 th Aug 2025
BO-25-39	Decoeur Ext.	180	-60	207	675423	5343350	308	26 th Aug 2025
BO-25-40	Decoeur	220	-55	408	675089	5343598	320	26 th Aug 2025
BO-25-41	Paquin	187	-51	225	676496	5343909	324	30 th Sept 2025
BO-25-42	Paquin	150	-52	222	676495	5343909	325	30 th Sept 2025
BO-25-43	Paquin	210	-45	234	676551	5343907	324	30 th Sept 2025
BO-25-44	Paquin	210	-45	252	676796	5343897	323	30 th Sept 2025
BO-25-45	Paquin	210	-45	273	676601	5343677	321	28 th Oct 2025
BO-25-46	VLF	210	-45	252	676551	5343589	321	28 th Oct 2025
BO-25-47	VLF	210	-45	264	676501	5343503	320	28 th Oct 2025
BO-25-48	VLF	210	-45	312	676793	5343508	311	28 th Oct 2025
BO-25-49	VLF	210	-50	252	676843	5343595	311	28 th Oct 2025
BO-25-50	Decoeur Ext.	180	-60	162	675641	5343263	316	28 th Oct 2025
BO-25-51	Decoeur Ext.	180	-60	174	675838	5343286	310	28 th Oct 2025
BO-25-52	CB-1	153	-45	201	677036	5344273	338	28 th Oct 2025
BO-25-53	CB-1	343	-45	252	677036	5344273	338	6 th Jan 2026
BO-25-54	CB-1	155	-48	357	677011	5344327	340	28 th Oct 2025
BO-25-55	CB-1	156	-45	330	676898	5344358	339	6 th Jan 2026
BO-25-56	CB-1	156	-45	300	677092	5344409	339	6 th Jan 2026
BO-25-57	Paquin	211	-50	204	676625	5343718	321	6 th Jan 2026
BO-25-58	Paquin	210	-50	201	676674	5343705	321	6 th Jan 2026
BO-25-59	Paquin	210	-50	204	676575	5343732	324	6 th Jan 2026
BO-26-60	Paquin	210	-50	237	676714	5343817	323	20 th April 2026
BO-26-61	Paquin	208	-50	192	676685	5343765	322	20 th April 2026
BO-26-62	Paquin	208	-60	195	676634	5343776	322	20 th April 2026
BO-26-63	Paquin	330	-56	249	676560	5343688	321	31 st Mar 2026
BO-26-64	Paquin	208	-60	204	676590	5343801	322	20 th April 2026
BO-26-65	Paquin	208	-50	162	676523	5343782	322	20 th April 2026
BO-26-66	BRG01	165	-60	400	675992	5346671	357	NSR

Hole	Prospect/Target	Azimuth	Dip	Length	Easting	Northing	Elevation	Status
BO-26-67	Paquin	195	-54	240	676567	5343860	323	3 rd August 2026
BO-26-68	Paquin	210	-60	276	676595	5343843	322	This Announcement
BO-26-69	Paquin	210	-60	267	676580	5343850	323	This Announcement
BO-26-70	Paquin	210	-60	249	676631	5343832	323	This Announcement
BO-26-71	Paquin	150	-58	396	676441	5343950	320	This Announcement

Table 3: Significant gold intersections from 2025/26 drilling at the Bousquet Gold Project (Current announcement highlighted green, $\geq 0.5\text{g/t Au}$ cut-off, 1m min. width, 2m max. internal dilution (downhole))

Hole ID	Prospect	From (m)	Width (m)	Au (g/t)	Significant Intercept
BO-25-27	Paquin	34.00	1.50	0.62	1.50m @ 0.62 g/t Au from 34.00m
BO-25-27	Paquin	183.00	6.40	6.54	6.40m @ 6.54 g/t Au from 183.00m
BO-25-27	Paquin	199.50	1.50	0.83	1.50m @ 0.83 g/t Au from 199.50m
BO-25-27	Paquin	218.00	1.55	2.05	1.55m @ 2.05 g/t Au from 218.00m
BO-25-28	Paquin	42.00	1.00	0.79	1.00m @ 0.79 g/t Au from 42.00m
BO-25-28	Paquin	81.30	1.00	0.77	1.00m @ 0.77 g/t Au from 81.30m
BO-25-28	Paquin	101.00	1.30	2.22	1.30m @ 2.22 g/t Au from 101.00m
BO-25-28	Paquin	104.35	2.15	1.99	2.15m @ 1.99 g/t Au from 104.35m
BO-25-28	Paquin	109.30	4.00	0.63	4.00m @ 0.63 g/t Au from 109.30m
BO-25-28	Paquin	125.40	1.20	3.18	1.20m @ 3.18 g/t Au from 125.40m
BO-25-28	Paquin	130.50	1.50	1.12	1.50m @ 1.12 g/t Au from 130.50m
BO-25-28	Paquin	138.00	7.90	6.20	7.90m @ 6.20 g/t Au from 138.00m
BO-25-28	Paquin	156.00	1.00	0.86	1.00m @ 0.86 g/t Au from 156.00m
BO-25-28	Paquin	167.60	1.40	0.95	1.40m @ 0.95 g/t Au from 167.60m
BO-25-28	Paquin	187.90	12.60	0.59	12.60m @ 0.59 g/t Au from 187.90m
BO-25-28	Paquin	235.50	1.50	54.20	1.50m @ 54.20 g/t Au from 235.50m
BO-25-29	Paquin	177.00	1.30	0.66	1.30m @ 0.66 g/t Au from 177.00m
BO-25-29	Paquin	183.00	1.50	0.78	1.50m @ 0.78 g/t Au from 183.00m
BO-25-29	Paquin	191.80	1.20	1.60	1.20m @ 1.60 g/t Au from 191.80m
BO-25-29	Paquin	199.70	1.65	0.66	1.65m @ 0.66 g/t Au from 199.70m
BO-25-29	Paquin	203.40	1.10	0.83	1.10m @ 0.83 g/t Au from 203.40m
BO-25-31	Amadee	36.00	6.30	0.95	6.30m @ 0.95 g/t Au from 36.00m
BO-25-31	Amadee	49.50	2.10	1.40	2.10m @ 1.40 g/t Au from 49.50m
BO-25-32	Amadee	49.00	1.00	2.32	1.00m @ 2.32 g/t Au from 49.00m
BO-25-33	Amadee	49.30	4.55	1.71	4.55m @ 1.71 g/t Au from 49.30m
BO-25-33	Amadee	60.00	1.30	1.14	1.30m @ 1.14 g/t Au from 60.00m
BO-25-34	Amadee	31.50	1.50	4.70	1.50m @ 4.70 g/t Au from 31.50m
BO-25-34	Amadee	39.00	5.80	1.06	5.80m @ 1.06 g/t Au from 39.00m
BO-25-34	Amadee	49.70	1.30	1.18	1.30m @ 1.18 g/t Au from 49.70m
BO-25-34	Amadee	60.00	4.30	0.98	4.30m @ 0.98 g/t Au from 60.00m
BO-25-35	Amadee	36.00	1.00	0.51	1.00m @ 0.51 g/t Au from 36.00m
BO-25-35	Amadee	57.00	1.00	0.75	1.00m @ 0.75 g/t Au from 57.00m
BO-25-35	Amadee	62.20	2.10	1.14	2.10m @ 1.14 g/t Au from 62.20m

Hole ID	Prospect	From (m)	Width (m)	Au (g/t)	Significant Intercept
BO-25-35	Amadee	67.80	10.70	0.69	10.70m @ 0.69 g/t Au from 67.80m
BO-25-35	Amadee	82.85	1.95	2.05	1.95m @ 2.05 g/t Au from 82.85m
BO-25-36	Amadee	31.55	1.45	1.57	1.45m @ 1.57 g/t Au from 31.55m
BO-25-36	Amadee	47.30	1.10	0.89	1.10m @ 0.89 g/t Au from 47.30m
BO-25-37	Amadee	80.15	2.25	1.29	2.25m @ 1.29 g/t Au from 80.15m
BO-25-37	Amadee	88.00	2.35	2.02	2.35m @ 2.02 g/t Au from 88.00m
BO-25-37	Amadee	113.15	6.85	1.11	6.85m @ 1.11 g/t Au from 113.15m
BO-25-38	Amadee	5.65	4.50	3.29	4.50m @ 3.29 g/t Au from 5.65m
BO-25-38	Amadee	27.40	1.15	0.54	1.15m @ 0.54 g/t Au from 27.40m
BO-25-39	Decoeur	13.25	3.75	2.24	3.75m @ 2.24 g/t Au from 13.25m
BO-25-40	Decoeur	338.00	2.15	0.84	2.15m @ 0.84 g/t Au from 338.00m
BO-25-40	Decoeur	355.50	14.50	1.96	14.50m @ 1.96 g/t Au from 355.50m
BO-25-40	Decoeur	373.80	2.00	1.39	2.00m @ 1.39 g/t Au from 373.80m
BO-25-41	Paquin	67.00	1.20	0.58	1.20m @ 0.58 g/t Au from 67.00m
BO-25-41	Paquin	182.30	4.90	2.16	4.90m @ 2.16 g/t Au from 182.30m
BO-25-41	Paquin	204.00	1.30	2.52	1.30m @ 2.52 g/t Au from 204.00m
BO-25-42	Paquin	87.00	1.00	0.57	1.00m @ 0.57 g/t Au from 87.00m
BO-25-42	Paquin	216.50	1.50	0.68	1.50m @ 0.68 g/t Au from 216.50m
BO-25-43	Paquin	190.00	2.60	3.13	2.60m @ 3.13 g/t Au from 190.00m
BO-25-43	Paquin	195.00	1.50	0.60	1.50m @ 0.60 g/t Au from 195.00m
BO-25-43	Paquin	207.00	1.00	0.65	1.00m @ 0.65 g/t Au from 207.00m
BO-25-43	Paquin	210.00	1.00	4.43	1.00m @ 4.43 g/t Au from 210.00m
BO-25-44	Paquin	99.60	1.40	1.42	1.40m @ 1.42 g/t Au from 99.60m
BO-25-44	Paquin	219.00	1.00	6.33	1.00m @ 6.33 g/t Au from 219.00m
BO-25-45	VLF	21.75	1.00	1.07	1.00m @ 1.07 g/t Au from 21.75m
BO-25-45	VLF	131.00	1.00	0.70	1.00m @ 0.70 g/t Au from 131.00m
BO-25-45	VLF	188.50	1.10	3.43	1.10m @ 3.43 g/t Au from 188.50m
BO-25-46					No significant intercept
BO-25-47					No significant intercept
BO-25-48	VLF	94.20	1.05	1.40	1.05m @ 1.40 g/t Au from 94.20m
BO-25-48	VLF	103.50	1.50	0.91	1.50m @ 0.91 g/t Au from 103.50m
BO-25-48	VLF	171.50	3.00	0.60	3.00m @ 0.60 g/t Au from 171.50m
BO-25-49	VLF	198.80	1.32	0.55	1.32m @ 0.55 g/t Au from 198.80m
BO-25-50	Decoeur Ext.	37.00	2.00	1.15	2.00m @ 1.15 g/t Au from 37.00m
BO-25-51	Decoeur Ext.	47.10	7.10	1.43	7.10m @ 1.43 g/t Au from 47.10m
BO-25-51	Decoeur Ext.	59.60	2.40	1.06	2.40m @ 1.06 g/t Au from 59.60m
BO-25-51	Decoeur Ext.	68.00	1.00	0.50	1.00m @ 0.50 g/t Au from 68.00m
BO-25-52	CB-1				No significant intercept
BO-25-53	CB-1	218.20	1.30	12.20	1.30m @ 12.20 g/t Au from 218.20m
BO-25-53	CB-1	225.00	1.50	0.66	1.50m @ 0.66 g/t Au from 225.00m
BO-25-54	CB-1	224.00	1.35	1.54	1.35m @ 1.54 g/t Au from 224.00m
BO-25-54	CB-1	245.70	1.30	0.82	1.30m @ 0.82 g/t Au from 245.70m
BO-25-54	CB-1	261.80	1.50	1.18	1.50m @ 1.18 g/t Au from 261.80m

Hole ID	Prospect	From (m)	Width (m)	Au (g/t)	Significant Intercept
BO-25-54	CB-1	279.30	1.00	1.73	1.00m @ 1.73 g/t Au from 279.30m
BO-25-54	CB-1	289.50	2.70	1.49	2.70m @ 1.49 g/t Au from 289.50m
BO-25-54	CB-1	334	1	0.602	1.00m @ 0.60 g/t Au from 334.00m
BO-25-54	CB-1	341	1.5	0.606	1.50m @ 0.61 g/t Au from 341.00m
BO-25-55	CB-1	156.10	1.30	0.54	1.30m @ 0.54 g/t Au from 156.10m
BO-25-55	CB-1	270.90	1.45	2.04	1.45m @ 2.04 g/t Au from 270.90m
BO-25-56	CB-1	250.50	1.50	0.51	1.50m @ 0.51 g/t Au from 250.50m
BO-25-57	Paquin	24.35	3.00	2.21	3.00m @ 2.21 g/t Au from 24.35m
BO-25-57	Paquin	33.00	3.00	1.16	3.00m @ 1.16 g/t Au from 33.00m
BO-25-57	Paquin	49.30	1.15	1.78	1.15m @ 1.78 g/t Au from 49.30m
BO-25-57	Paquin	59.80	1.20	0.50	1.20m @ 0.50 g/t Au from 59.80m
BO-25-57	Paquin	61.95	1.20	1.56	1.20m @ 1.56 g/t Au from 61.95m
BO-25-57	Paquin	92.50	1.50	4.22	1.50m @ 4.22 g/t Au from 92.50m
BO-25-57	Paquin	183.00	1.30	1.16	1.30m @ 1.16 g/t Au from 183.00m
BO-25-58	Paquin	25.10	1.30	0.58	1.30m @ 0.58 g/t Au from 25.10m
BO-25-58	Paquin	48.50	1.15	1.07	1.15m @ 1.07 g/t Au from 48.50m
BO-25-58	Paquin	64.35	1.35	1.73	1.35m @ 1.73 g/t Au from 64.35m
BO-25-58	Paquin	126.00	1.00	1.13	1.00m @ 1.13 g/t Au from 126.00m
BO-25-59	Paquin	23.75	1.45	0.83	1.45m @ 0.83 g/t Au from 23.75m
BO-25-59	Paquin	50.50	1.10	0.62	1.10m @ 0.62 g/t Au from 50.50m
BO-25-59	Paquin	70.15	4.25	0.98	4.25m @ 0.98 g/t Au from 70.15m
BO-25-59	Paquin	76.70	1.30	0.89	1.30m @ 0.89 g/t Au from 76.70m
BO-25-59	Paquin	108.00	1.50	0.57	1.50m @ 0.57 g/t Au from 108.00m
BO-25-59	Paquin	187.70	1.00	0.98	1.00m @ 0.98 g/t Au from 187.70m
BO-26-60	Paquin	54.50	1.50	0.50	1.50m @ 0.50 g/t Au from 54.50m
BO-26-60	Paquin	59.70	3.80	5.03	3.80m @ 5.03 g/t Au from 59.70m
BO-26-60	Paquin	66.70	2.80	0.56	2.80m @ 0.56 g/t Au from 66.70m
BO-26-60	Paquin	153.60	1.40	0.86	1.40m @ 0.86 g/t Au from 153.60m
BO-26-60	Paquin	175.00	1.00	1.24	1.00m @ 1.24 g/t Au from 175.00m
BO-26-61	Paquin	81.00	1.50	0.53	1.50m @ 0.53 g/t Au from 81.00m
BO-26-61	Paquin	121.35	4.65	0.72	4.65m @ 0.72 g/t Au from 121.35m
BO-26-61	Paquin	129.00	1.00	1.89	1.00m @ 1.89 g/t Au from 129.00m
BO-26-61	Paquin	135.00	1.00	1.52	1.00m @ 1.52 g/t Au from 135.00m
BO-26-61	Paquin	139.85	3.55	0.59	3.55m @ 0.59 g/t Au from 139.85m
BO-26-62	Paquin	79.50	4.35	0.95	4.35m @ 0.95 g/t Au from 79.50m
BO-26-62	Paquin	104.00	3.30	1.45	3.30m @ 1.45 g/t Au from 104.00m
BO-26-63	Paquin	37.10	2.9	0.81	2.9m @ 0.81 g/t Au from 37.1m
BO-26-63	Paquin	42.50	2.7	2.69	2.7m @ 2.69 g/t Au from 42.5m
BO-26-63	Paquin	105.50	2.2	0.70	2.2m @ 0.70 g/t Au from 105.5m
BO-26-63	Paquin	123.00	1.5	1.96	1.5m @ 1.96 g/t Au from 123.0m
BO-26-63	Paquin	138.70	2.3	0.65	2.3m @ 0.65 g/t Au from 138.7m
BO-26-63	Paquin	163.90	4.1	1.68	4.1m @ 1.68 g/t Au from 163.9m
BO-26-63	Paquin	172.50	19.4	17.29	19.4m @ 17.29 g/t Au from 172.5m

Hole ID	Prospect	From (m)	Width (m)	Au (g/t)	Significant Intercept
BO-26-63	Paquin	208.50	3.0	0.75	3.0m @ 0.75 g/t Au from 208.5m
BO-26-63	Paquin	216.25	2.75	1.42	2.75m @ 1.42 g/t Au from 216.25m
BO-26-64	Paquin	5.75	1.15	0.56	1.15m @ 0.56 g/t Au from 5.75m
BO-26-64	Paquin	18.00	2.00	1.11	2.00m @ 1.11 g/t Au from 18.00m
BO-26-64	Paquin	26.30	4.20	1.14	4.20m @ 1.14 g/t Au from 26.30m
BO-26-64	Paquin	36.00	3.25	1.05	3.25m @ 1.05 g/t Au from 36.00m
BO-26-64	Paquin	74.90	6.10	1.24	6.10m @ 1.24 g/t Au from 74.90m
BO-26-64	Paquin	93.45	2.00	2.66	2.00m @ 2.66 g/t Au from 93.45m
BO-26-64	Paquin	100.50	3.00	0.85	3.00m @ 0.85 g/t Au from 100.50m
BO-26-64	Paquin	120.75	2.85	0.89	2.85m @ 0.89 g/t Au from 120.75m
BO-26-64	Paquin	135.00	1.00	1.31	1.00m @ 1.31 g/t Au from 135.00m
BO-26-64	Paquin	186.90	2.10	1.04	2.10m @ 1.04 g/t Au from 186.90m
BO-26-65	Paquin	86.00	2.50	0.60	2.50m @ 0.60 g/t Au from 86.00m
BO-26-64	Paquin	5.75	1.15	0.56	1.15m @ 0.56 g/t Au from 5.75m
BO-26-64	Paquin	18.00	2.00	1.11	2.00m @ 1.11 g/t Au from 18.00m
BO-26-64	Paquin	26.30	4.20	1.14	4.20m @ 1.14 g/t Au from 26.30m
BO-26-64	Paquin	36.00	3.25	1.05	3.25m @ 1.05 g/t Au from 36.00m
BO-26-64	Paquin	74.90	6.10	1.24	6.10m @ 1.24 g/t Au from 74.90m
BO-26-64	Paquin	93.45	2.00	2.66	2.00m @ 2.66 g/t Au from 93.45m
BO-26-64	Paquin	100.50	3.00	0.85	3.00m @ 0.85 g/t Au from 100.50m
BO-26-64	Paquin	120.75	2.85	0.89	2.85m @ 0.89 g/t Au from 120.75m
BO-26-64	Paquin	135.00	1.00	1.31	1.00m @ 1.31 g/t Au from 135.00m
BO-26-64	Paquin	186.90	2.10	1.04	2.10m @ 1.04 g/t Au from 186.90m
BO-26-65	Paquin	86.00	2.50	0.60	2.50m @ 0.60 g/t Au from 86.00m
BO-26-66	Paquin				No significant intercept
BO-26-67	Paquin	171.00	5.00	4.54	5.00m @ 4.54 g/t Au from 171.00m
BO-26-67	Paquin	208.65	1.85	2.17	1.85m @ 2.17 g/t Au from 208.65m
BO-26-68	Paquin	174.00	11.00	1.43	11.00m @ 1.43 g/t Au from 174.00m
BO-26-68	Paquin	226.40	1.10	2.30	1.10m @ 2.30 g/t Au from 226.40m
BO-26-68	Paquin	273.00	1.50	0.53	1.50m @ 0.53 g/t Au from 273.00m
BO-26-69	Paquin	175.50	4.50	0.93	4.50m @ 0.93 g/t Au from 175.50m
BO-26-69	Paquin	187.50	3.50	1.15	3.50m @ 1.15 g/t Au from 187.50m
BO-26-69	Paquin	204.00	1.50	0.60	1.50m @ 0.60 g/t Au from 204.00m
BO-26-69	Paquin	211.50	1.50	0.88	1.50m @ 0.88 g/t Au from 211.50m
BO-26-69	Paquin	223.50	2.55	1.67	2.55m @ 1.67 g/t Au from 223.50m
BO-26-70	Paquin	49.00	1.00	1.35	1.00m @ 1.35 g/t Au from 49.00m
BO-26-70	Paquin	54.00	6.10	1.01	6.10m @ 1.01 g/t Au from 54.00m
BO-26-70	Paquin	168.00	1.50	0.61	1.50m @ 0.61 g/t Au from 168.00m
BO-26-71	Paquin	236.00	1.00	0.61	1.00m @ 0.61 g/t Au from 236.00m
BO-26-71	Paquin	259.5	1.5	0.53	1.50m @ 0.53 g/t Au from 259.50m

References

ⁱ Poulsen, K., 2017 The Larder Lake-Cadillac Break and Its Gold Districts, *Economic Geology*, v. 19, pp. 133–167

ⁱⁱ NI 43-101 Technical Report, La Ronde Complex, Québec, Canada, 24 March 2023

ⁱⁱⁱ Iamgold Corporation, Table 3: Mineral Reserves and Mineral Resources, 31 December 2023, retrieved from https://s202.q4cdn.com/468687163/files/doc_news/2024/02/iag-2024-mrrmr-estimate.pdf

^{iv} IAMGOLD 2016, Drilling Campaign Report, GM70826
<https://gq.mines.gouv.qc.ca/documents/EXAMINE/GM70826/GM70826RAP001.pdf>

JORC Code - Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	Explanation	Comment
Sampling techniques	<i>Nature and quality of sampling.</i>	Current Exploration Olympio has previously completed two phases of diamond drilling on the Bousquet Project. A third phase of diamond drilling is now reported. Diamond drill core (NQ) was collected in timber core trays, sequence checked, metre marked at the drill site. The drill core was transported to and logged at the Explo-Logik core facility in Val-d'Or, Quebec, by qualified contract geologists engaged by Olympio. Core samples were selected based on visual observations of alteration and mineralisation and sampled to geological contacts or over nominal 1 m intervals, as appropriate. Selected intervals were marked and the core was cut longitudinally in half using a diamond saw. One half was retained in the core tray for reference, while the other half was submitted for assay. Historical Exploration Drilling Diamond drilling to produce core samples is the only sampling technique reported. The drilling data included in this release comes from a range of historical drilling programs. These are grouped in 3 sets as follows: BG Drilling: Sampling techniques from Bullion Gold drilling 2021 to 2023 (Hole series BO-21 and BO-22, GM73520) is described in detail. TM Drilling: Sampling techniques from Twin Mining drilling 2003 to 2007 (Hole series TMN, GM61411) are described in detail. 20thC Drilling: Sampling techniques from all other drilling programs (mostly pre-1947) typically have no details recorded in historical records and reports. Channel Sampling: GM34572 1978 Channel samples were collected by electric jack hammer under the supervision of a Quebec certified geologist. Sample density appears to be appropriate to the vein density existing in mapped outcrops.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	
	<i>Aspects of the determination of mineralisation that are Material to the Public Report.</i>	
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Current Exploration Industry-standard diamond drilling methods and equipment were utilised for the program. All diamond drill core was recovered as NQ diameter core. Downhole surveys were completed using an Imdex TN14 instrument at approximately 30 m intervals, with drill rig alignment established using an Imdex TN14 Gyro. Diamond core was not oriented during this drilling program. Historical Exploration All drilling within the project area has been diamond core. BG, TM & 20thC: No records of any oriented core The drill core size is not specified for the majority of drill holes.
	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	
Drill sample recovery	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	Current Exploration Core recovery is recorded for each 3 m drill interval by the field geologist, with recovery measurements recorded digitally and loaded into the Olympio drill hole database. No significant relationship between core recovery and assay grade has been observed in the results received to date Historical Exploration BG, TM & 20thC: Core recovery is not recorded for the majority of drill holes.
	<i>Whether a relationship exists between sample recovery and grade ...</i>	

		The measures taken by previous explorer to maximise recovery is not recorded. With no recovery data available, no comment about any recovery/grade relationship is possible.
Logging	<i>Whether core and chip samples have been logged</i>	Current Exploration All drill core was qualitatively logged by Explo-Logik staff geologists in accordance with established logging procedures. Logging included lithology, alteration, mineralisation, veining and weathering, with additional geological comments recorded where appropriate. Geological logging data were recorded digitally and loaded into the Olympio drill hole database. All drill core was photographed wet using standard industry procedures. Historical Exploration BG Drilling: All drilling has drill logs available. The drill core was logged and marked for sampling by a professional geologist. Sample lengths ranged from 0.3 to 2.0m. The main criterion for sample selection was based on the presence of one of the visible features of the mineralised zones (sulphides, visible gold, alteration, blue quartz). Logging is qualitative. The majority of the core has been core has been logged. All descriptive logs are in French summary logging is in English. TM Drilling: All drilling has drill logs available. Logging is qualitative. All core has been logged. All descriptive logs are in English. 20thC Drilling: Drill logs are available for some drill holes with a range of detail/quality. Measurements are generally in imperial units (feet) and logs in either French or English.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	
	<i>The total length and percentage of the relevant intersections logged.</i>	
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Current Exploration Core samples were collected by sawing each selected interval longitudinally using a diamond-blade rock saw. One half of the core was retained in the core tray for reference, while the remaining half was placed into a labelled sample bag. A unique sample identification tag was inserted into the bag, with the sample number also recorded on the exterior in permanent marker. The sample bags were securely sealed using plastic cable ties prior to dispatch to the laboratory. Sample are sent to AGAT Laboratories in Thunder Bay Half-core samples were crushed to 90% passing 2 mm and riffle split to obtain a 250 g sub-sample, which was then pulverised to produce a pulp with 90% passing 105 µm. Gold analysis was completed using a 50 g fire assay fusion with Atomic Absorption Spectroscopy (AAS) finish (Method 202-551). Multi-element analysis for 34 elements was undertaken using a four-acid digest with ICP-OES finish (Method 201-070). Samples identified by the logging geologist as containing, or potentially containing, coarse gold were additionally analysed using a screen fire assay method (Method 202-121). For this procedure, a 1 kg sub-sample of the pulverised material was screened at 106 µm. The +106 µm fraction was analysed in its entirety by fire assay with ICP-OES finish, while the -106 µm fraction was analysed by fire assay with ICP-OES finish. The total gold grade was calculated from the weighted average of the coarse and fine fractions. Historical Exploration BG Drilling: Core samples were collected by sawing each sample interval in half lengthwise with a bench rock saw. One half of the interval was returned to the core box, and the other half was placed in a plastic bag with a tag. The tag number was marked in indelible ink on the outside of the bag, and the bag was sealed with a plastic tie-wrap. Sample preparation was undertaken at the Lab Expert facility in Rouyn-Noranda. The half core samples were crushed to 70% passing 2mm and then riffle split to a 250g sub-sample that was pulverised to pulp 85% passing 75µm. All analyses were done using a 50g fire assay fusion (FA) with Atomic Absorption Spectroscopy (AAS) finish. Assays exceeding 3g/t Au were checked by re-assaying using FA with gravimetric finish. Where the logging geologist deemed appropriate, the sample was analysed using metallic screen assay techniques. Lab Expert protocols were considered by the Qualified Person (for GM73520) to be consistent, in general, with industry standards. TM Drilling: Drill core was split by hydraulic splitter, and approximately half the cores sampled. Sample preparation methods are not recorded. 20thC Drilling: Core sampling techniques of historical drilling other than BG and TM is unknown. Channel Sampling: GM34572 1978 sample preparation is not recorded
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	
	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i>	
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	

Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc,</i> <i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	Current Exploration All samples were submitted to AGAT Laboratories in Thunder Bay for analysis. Gold was determined by 50 g fire assay with an Atomic Absorption Spectroscopy (AAS) finish (Method 202-551). Multi-element analysis was completed using a four-acid digest with ICP-OES finish for a suite of 34 elements (Method 201-070). Samples identified either containing, or potentially containing, coarse gold were additionally analysed using a 1 kg screen fire assay method (Method 202-121). AGAT Laboratories operates in accordance with ISO 9001:2015 and ISO/IEC 17025 accredited quality management systems. Historical Exploration BG Drilling: All analyses were done using a 50g fire assay fusion (FA) with Atomic Absorption Spectroscopy (AAS) finish. Assays exceeding 3g/t Au were checked by re-assaying using FA with gravimetric finish. Where the logging geologist deemed appropriate, the sample was analysed using metallic screen assay techniques. One certified reference material (CRM) standard and one blank were included in each batch of 20 samples (inserted at 1/19 samples). CRM used were SF85, SF100, SG102, SG115, SG81. 58% of the CRM assay results were reported higher than 3 standard deviations from the certified value, which is considered a poor performance from the lab. It was recommended to review the assay certificates and re-assay the pulps before and after the failed standards. TM Drilling: Hole series TMN- (Twin Mining GM61411) was assayed at ALS Vancouver using a fire assay with a 30g split, AAS finish, 5ppb detection limit. Assays over 1g/t Au were re-assayed. Twin Mining reported that no quality assurance/quality control checks were performed. 20thC Drilling: Procedures for other historical drilling are unknown. No QA/QC data is recorded. Channel Sampling: GM34572 1978 Samples were analysed at Assayers Ltd, Rouyn-Noranda. By combined Fire Assay – AAS with 7ppb DL.
Verification of sampling and assaying	<i>The verification of significant intersections by independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage protocols.</i> <i>Discuss any adjustment to assay data.</i>	Current Exploration Significant intercepts have been determined by the following parameters. =>1m @ =>0.5g/t Au, with maximum 2m consecutive internal waste. These significant intercepts have been verified by an independent geology consultant. The standard OLY protocol is followed for insertion of standards and blanks with a blank and standard inserted ratio of approximately 1 in 50 for diamond Drilling. Prep duplicates are created in the lab where a 1kg sample is split into two 500g splits, each 500g split is then split again into 2 x 250g splits, one 250g split is retained as reject and the other proceeds to pulverising as a duplicate sample, within known ore zones to assess repeatability One standard (OREAS 295, sample F937187, BO-26-71) returned a gold grade materially below its certified value and is being investigated with the laboratory; all other standards were within 10% of their certified values and all blanks were below 0.01 g/t Au. No twinned drilling has been undertaken. No twinned drilling has been undertaken. Historical Exploration BG Drilling: No independent verification or twinned holes have been used. Adequate documentation of the drill data is available. No adjustments of data are recorded. TM Drilling: No independent verification or twinned holes have been used. Adequate documentation of basic aspects of the drill data is available. No adjustments of data are recorded. 20thC Drilling: No independent verification or twinned holes have been used. For the majority of historical drill holes, the data is not well documented. Translation from imperial to metric system measurements has been made in the database. Channel Sampling: GM34572 1978 no verification sampling is recorded
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Current Exploration Drill hole collars are recorded electronically using Garmin handheld GPS units. Coordinates are recorded in NAD83 / UTM Zone 17N, which is appropriate for the Val-D'Or region.

	<i>Specification of the grid system used.</i>	Drill hole azimuths are aligned and downhole trajectories are surveyed using an Imdex TN14 Gyro. Drill hole collar positions are initially surveyed using handheld GPS units following completion of drilling. Drill hole collars, together with any drill holes intended for use in Mineral Resource estimation, are subsequently surveyed using Differential GPS (DGPS) equipment to provide improved positional accuracy. The accuracy and quality of the location data are considered appropriate for the style of mineralisation, stage of exploration and intended use of the data. Historical Exploration BG, TM & 20thC: The accuracy and location method of exploration data including historical drill holes is not recorded in the reports, logs and databases available. Grid system used is NAD83 / UTM zone 17N in accordance with the National Topographic System or NTS used by Natural Resources Canada for mapping. Topographic control is satisfactory for the exploration phase at which the project is at. Channel Sampling: GM34572 1978 samples are mapped in varying detail in numerous maps which allow the samples to be accurately located relative to outcropping geology in the field.
	<i>Quality and adequacy of topographic control.</i>	
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	Current Exploration Completed drilling is consistent with spacing used in previous drill programs, and appropriate for the mineralisation targeted, typically 25m drill hole spacing minimum for Paquin, with wider and irregular spacings controlled by geology at other prospects. Historical Exploration BG, TM & 20thC: The historical drilling data has been drilled at a range of spacing, azimuth and dip to intersect the interpreted mineralised horizons. Spacing is currently insufficient for resource estimation work. No sample compositing has been applied. Channel Sampling: GM34572 1978 data spacing and distribution is appropriate to the vein density observed in the field
	<i>Whether appropriate for the Mineral Resource ... estimation procedure(s) ...</i>	
	<i>Whether sample compositing has been applied.</i>	
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling</i>	Current Exploration Drilling is generally oriented perpendicular to the interpreted regional geological trends, where practical, to provide representative intersections of the mineralised zones. Where appropriate, cross-sections are presented to provide a visual indication of the relationship between reported drill hole intersection widths and the interpreted true thickness of the mineralised lodes. Detailed structural logging of oriented drill core and structural modelling are being undertaken as exploration progresses to improve understanding of the geological structures and the orientation of mineralised zones relative to drill hole intersections. In 2026, televiwer surveys were completed on 11 Phase 1 and 2 drill holes selected from across the Paquin and Amadee prospects, generating more than 6,000 structural measurements. The televiwer data provide additional information on the three-dimensional orientation and geometry of geological structures, veins and fractures intersected by drilling and are being incorporated into the geological and structural interpretation to assist in the design and orientation of future drilling. The current spacing and distribution of drilling and sampling data are considered appropriate for exploration purposes. The data density is not currently considered sufficient to support Mineral Resource estimation. Historical Exploration BG, TM & 20thC: The drill hole sampling orientation is considered appropriate to test the mineralised target horizons. The strike of the mineralised structures targeted is generally determined
	<i>relationship between the drilling orientation and structures is considered to have introduced a sampling bias.</i>	

		with drill holes set back and angled, producing intersections across the strike, thus reducing bias. Channel Sampling: GM34572 1978 sampling orientation is optimised relative to mineralised zones
Sample security	<i>The measures taken to ensure sample security.</i>	Current Exploration Sample security and chain of custody are managed by Explo-Logik staff, who are experienced in drill core and geological sample management. All drill core transportation, core sampling and sample transportation are conducted or managed by Explo-Logik personnel. Following sampling, core samples are securely packaged and dispatched by courier to AGAT Laboratories in Thunder Bay, for sample preparation and analysis. Historical Exploration BG: For shipping, samples were placed in rice bags that were individually sealed with numbered, tamper-proof security tags. The rice bags were sent to Lab Expert in Rouyn-Noranda. TM: The selected core intervals were split under the direction and supervision of the senior geologist. All samples were hand delivered by the senior geologist or approved project technical personnel to the ALS Chemex sample preparation laboratory in Val d'Or, Quebec. 20thC: No information about the sample security measures is present in the historical exploration reports. Channel Sampling: GM34572 1978 sample security is not recorded
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	No reviews or audits are recorded.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	Explanation	Comment
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The Bousquet Project comprises 71 mineral claims registered with the Quebec provincial government, covering a total area of approximately 23.69 km ² . The Property is located approximately 30 km east of the historic mining town of Rouyn-Noranda, Quebec, Canada. The Property comprises a contiguous package of wholly owned mineral claims held under title by Bullion Gold Resources Corp. and subject to an option agreement with Olympio.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The tenements are current and reported to be in good standing with the Quebec provincial government. A list of claim IDs is provided in Table 3 of the Company's ASX announcement dated 19 March 2025. Olympio is not aware of any known impediments to obtaining the necessary licences and permits to conduct exploration and development activities on the Property. The Bousquet Project is located within an established mining district, with numerous gold and base-metal operations currently operating in the region. Recent mining developments in the district have progressed through established permitting and regulatory processes administered by the Quebec and Canadian authorities. No development studies have been undertaken on the Bousquet Project to date. Various royalties apply to certain claims and may apply to future mineral production. In the event that the Project is developed and brought into commercial production, Falco will retain a 1.5% Net Smelter Return (NSR) royalty over the claims sold to Bullion Gold. Certain claims within Bousquet Township are also subject to additional royalty interests. On the original Normar Block, Barrick Gold and Atlanta Gold each hold a 1% NSR royalty, while Delfer Gold Mine holds a 5% Net Profit Interest. On the Blackfly Block, Atlanta Gold holds a 1% NSR royalty over certain claims, while Globex Resources holds a 0.5% Gross Mineral Profit interest over eight claims.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Historical exploration on the Bousquet Project comprises four main phases. Between 1932 and 1946, approximately 120 drill holes totalling 20,530 m were completed across the Paquin, Decoeur, Calder, Bousquet and Joannes prospects. Between 1967 and 1995, a further 14 drill holes totalling 2,532 m were completed, primarily at Paquin and north of Bouzanor, together with magnetic, electromagnetic and IP surveys and surface stripping and mapping. Between

		2003 and 2020, Twin Mining completed 39 drill holes totalling 13,574 m, primarily in the southeast of the Property. Between 2021 and 2023, Bullion Gold completed 26 diamond drill holes totalling 6,194 m, mainly at the Paquin and Decoeur prospects. No mining is recorded on the Property based on available records.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The geology of the property consists of volcano-sedimentary rocks divided in three major Groups. From North to South, there is the Cadillac Group, which is composed of turbidites, pelitic schists with beds of polymictic conglomerate and iron formations. The Timiskaming Group is composed of greywacke, siltstone, polymictic conglomerate, and talc-chlorite-carbonate schist (possibly from the Piché Formation). Occasional beds of argillite with graphitic mudstone also occurs. The Pontiac Group is composed of greywacke, interbedded with argillite, massive to pillowed mafic flows and ultramafic flows. The Piché Group is composed of a sequence of komatiites, mafic rocks, amphibolites, volcanic tuffs and flows and granitic intrusive. In many areas, the Piché formation is superposed with the CLLDZ and lies between the Cadillac and Timiskaming Groups. Numerous gold prospects occur on the property. Most of them are found within a gold mineralised shear zone in the southern part of the property. Gold mineralisation is associated with structurally controlled quartz veins (typically smoky blue-grey-white quartz) and sulphides within E-W oriented, north dipping structures. The dominant host unit is Timiskaming group turbidites, and lesser conglomerate. The Paquin prospect is located between 675716 and 676832mE and 5343683 and 5343802mN giving the mineralised zone a length of 1,300m and a thickness of in excess of 100 m. Paquin was identified through drilling as it does not outcrop. These are two mineralised envelopes (East and West) containing blue to smoky quartz veins and veinlets accompanied by visible gold, as well as disseminated or stringers of arsenopyrite, pyrite, and pyrrhotite. Each envelope is contained within silicified and carbonatised greywackes. The longitudinal sections of the East and West mineralised envelopes show that the gold mineralization is most prominent on the eastern part of the gold corridor with a length of 400m between section 676400E and 676800E. The thickness of the mineralised zone (along the hole) varies from a few meters to 10 to 12m and, in some instances, the envelope may contain more than one mineralised zone. The Decoeur prospect is located between 674860mE and 675300mE at 5343385mN, giving the prospect a length of 440 m. The Decoeur prospect is located immediately in the south contact with the polymictic conglomerates. The mineralization is associated with talc-chlorite-quartz-carbonate schist (probably komatiitic lava flows). Previous interpretation suggested that the mineralization was associated to an E-W fault. The mineralization is composed of stringers of pyrite, chalcopyrite, arsenopyrite and galena and associated quartz veins and veinlets and local silicification. The mineralised sections vary from thirty centimetres up to 28.5m wide. The best intersection metal factor wise was in hole TMN-03-14 where an intercept 1.26 g/t Au over 18.6m was recorded. The Joannes prospect is a westward continuation of the Decoeur prospect and was discovered by drilling in 1937. The gold mineralization is vein-type associated with clastic sediments (turbidites) of the Timiskaming Group. Minor komatiitic basalts are also present. Gold is associated with disseminated pyrite in quartz veins. Traces of chalcopyrite and arsenopyrite are also present. The shear zone contains several quartz veins and some pyrite. Other prospects and showings of mineralisation identified within the property are of similar geology to these main prospects.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i>	Drill hole collar coordinates, orientations and reported intersections are provided in the appended tables accompanying the relevant announcements for each drilling program.
Data aggregation methods	<i>... weighting averaging techniques, maximum and/or minimum grade truncations should be stated.</i> <i>The assumptions used for any reporting of metal equivalent values.</i>	Where drill intervals have been aggregated, the calculations are recorded as being weighted according to interval length. No allowance for recovery or truncations of grades are recorded in the documentation available. Significant drill intercepts noted in figures and tables of this announcement are reported at a minimum cut-off grade of 0.5 gram per tonne gold, minimum width of 1m (down-hole); maximum internal dilution of 2m. No metal equivalent values or formulas have been used.
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of mineralisation with respect to the drill hole angle</i>	Sample mineralisation intervals are reported as down-hole observed intervals in drill core, with true widths are not known. T
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included ...</i>	The maps and figures provided in this announcement provide an overview of the Bousquet project and accurately reflect recent exploration data acquired by Olympio, and historical exploration data as provided by the vendors in project databases and reports. The accuracy of information in databases and reports will be reviewed by Olympio personnel

		as the project progresses. Detailed maps and figures have been provided for recent exploration by Olympio and will be provided in further market announcements as targeting work and drill testing on each prospect is undertaken.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable</i>	The Project has a long history of exploration, with a significant body of historical data collected during the early 20th Century where recording of sampling methods and analytical parameters was limited. Later exploration data was generally reported in accordance with the applicable Quebec, Canadian and TSX reporting standards of the time. Prior to its acquisition by Olympio, the historical data had not been reported in accordance with the ASX Listing Rules or JORC Code. Olympio is continuing to review historical records, undertake field assessments and inspect preserved drill core to assess the reliability and suitability of historical data for use in the current exploration program. Historical data is being assessed on a prospect-by-prospect basis as exploration progresses. To date, historical results have generally correlated well with recent drilling and geological observations, increasing confidence in the reliability of the historical data. However, the historical data remains subject to ongoing validation and verification before being relied upon for Mineral Resource estimation or other higher-confidence reporting.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported.</i>	Current Exploration Only diamond drilling results are reported in this announcement. Historical Exploration Geophysical surveys have previously been undertaken by historical explorers over parts of the Bousquet project. These have been reported in previous announcements by Olympio, along with JORC Table commentary of the geophysical survey data.
Further Work	<i>The nature and scale of planned further work.</i>	The company has received the final results for the phase 3 drill program at Bousquet and is currently planning the next phase of exploration at the Bousquet Project