

ASX ANNOUNCEMENT 6 October 2026

Shallow High-Grade Gold from Metzke's North — Illaara

HIGHLIGHTS

- Metzke's North is a new discovery north of a Proterozoic dyke (a younger, unmineralised rock intrusion) that was previously thought to cut off the high-grade mineralisation at Metzke's Find.
- Assays have been received for a 22-hole (1,958m) Reverse Circulation (RC) drilling program, mainly at Metzke's North, with the balance at Metzke's Find (together "**Metzke's**"), part of the Illaara Gold Project ("**Illara**"). A 12-hole (1,328.9m) diamond drilling program has also been completed at Metzke's Find, with assays pending.
- The programs (Figure 2) were designed mainly to:
 - Extend the Resource at Metzke's North in order to increase the overall Resource at Metzke's (currently 24,900 oz @ 5.2 g/t Au - 84% Indicated); and
 - Provide additional metallurgical test work; assist in mine planning and to extend and upgrade the Resource (already at 84% Indicated) (4 twin and 8 extension holes).
- The RC program has successfully intersected shallow, high-grade gold at Metzke's North with significant results including:

MZRC174: **7m @ 8.6 g/t Au** from 8m, including **1m @ 57.1 g/t Au** from 8m

MZRC180: **2m @ 4.2 g/t Au** from 112m MZRC186: **2m @ 1.2 g/t Au** from 21m

MZRC169: **3m @ 1.9 g/t Au** from 30m
- Of the diamond program at Metzke's Find, 4 were twin holes (drilled alongside earlier holes to verify previous results) for quality control and metallurgical test work and 8 were extensional holes testing Metzke's Find extensions below the current Resource. A total of 4 of the extensional holes intersected visible gold over intervals ranging from 0.55m – 2.94m in thickness (Table 1). Visual observations are not a substitute for laboratory assays which are expected in November 2026.
- The RC and diamond program results will be used to extend and upgrade the current Resource and to support mining studies.

Dreadnought Resources Ltd ("Dreadnought") is pleased to announce results from RC and observations from diamond drilling at Metzke's North/Find, part of the 100% owned Illara Gold Project, in the Yilgarn region of WA.

Dreadnought's Managing Director, Dean Tuck, commented: "Drilling at Metzke's North has produced one of the highest-grade intercepts to date and from just 8m depth. Additionally, half of our extensional diamond holes have intersected visible gold. Together, we believe these results have the potential to grow the Resource and, importantly, we have gathered important structural information to target down plunge extensions in future programs.

The diamond program also provides core for important study-related work. With geotechnical work now completed we can send the core for assay and metallurgical test work.

We expect further results in November 2026 as we advance Metzke's Find towards studies, approvals and production."

Figure 1: Image of the PXD diamond and Newgen RC rigs drilling at Metzke's Find.



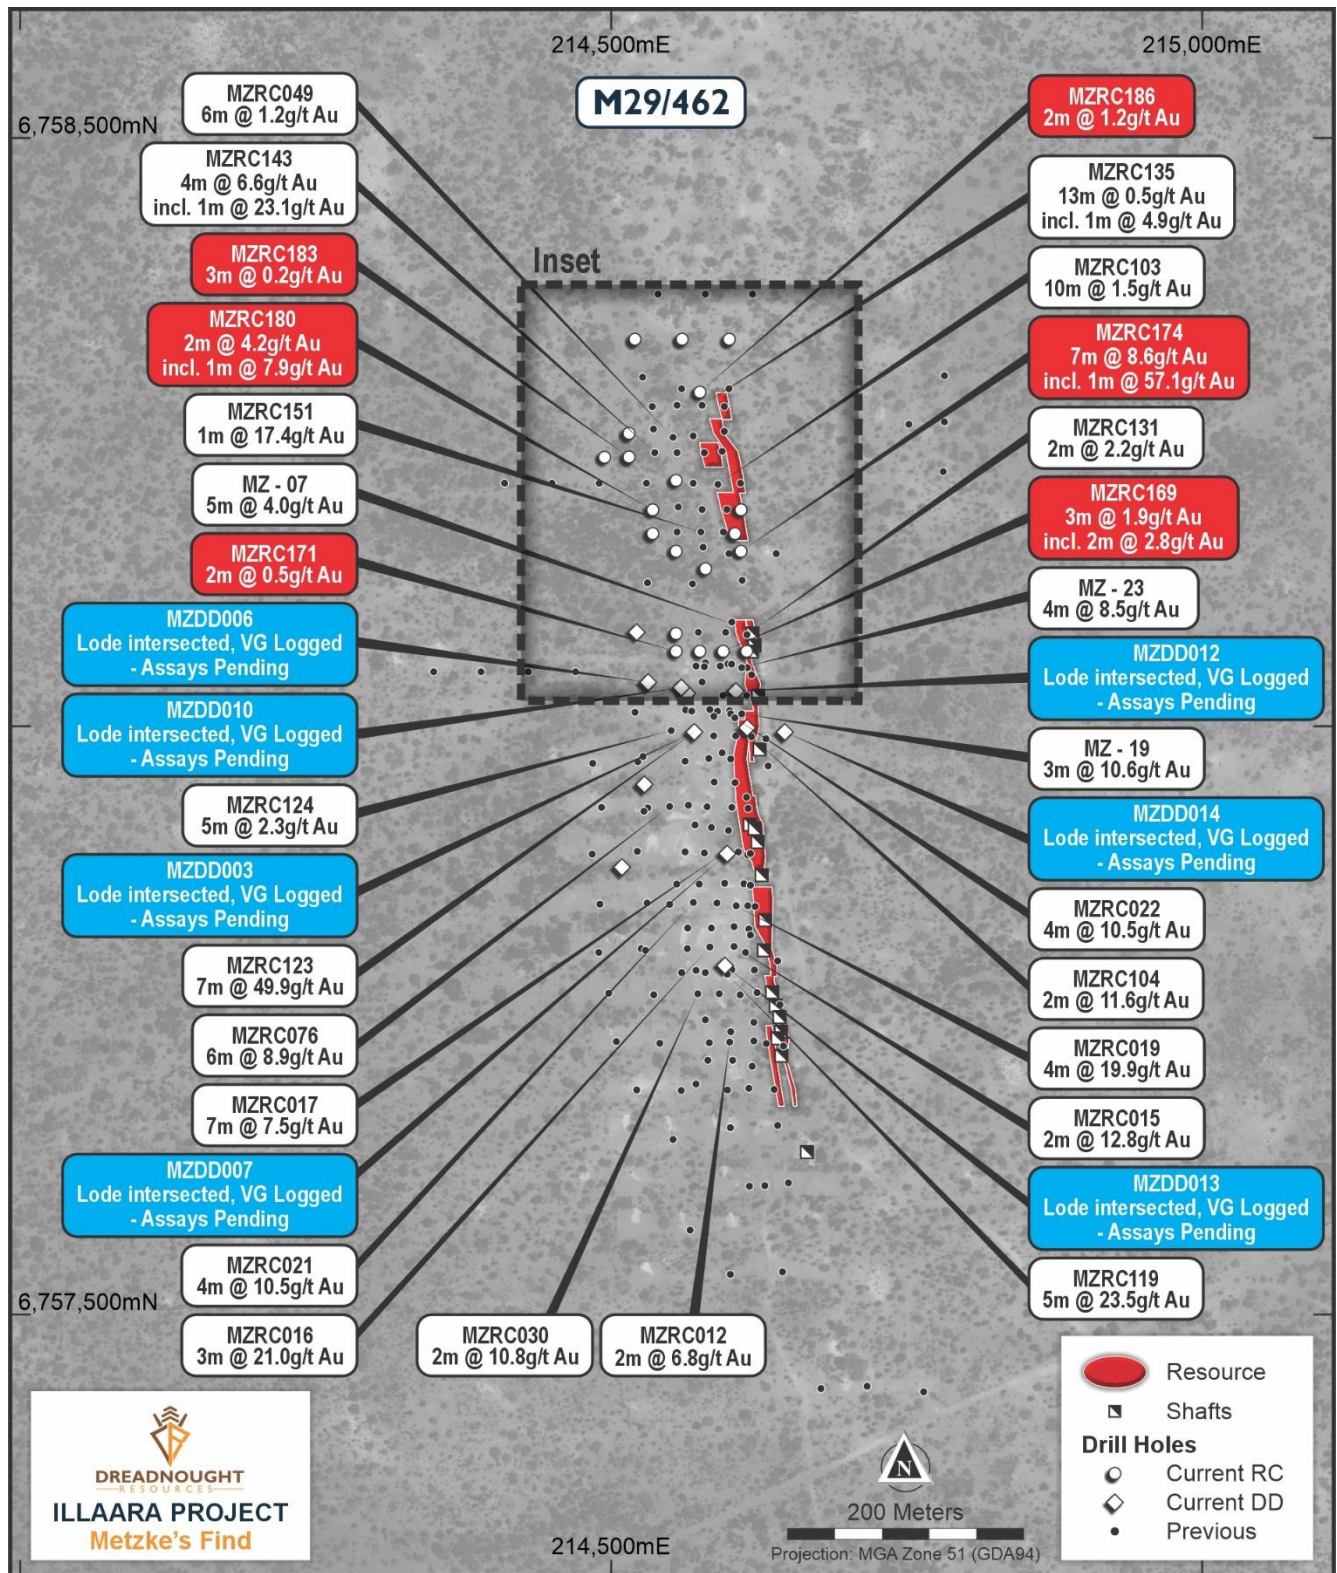


Figure 2: Plan view map of Metzke's Find and Metzke's North showing: the break in mineralisation due to a Proterozoic dyke; the location of the RC program mainly at Metzke's North (boxed area); the diamond program at Metzke's Find all in relation to previous drilling and the Metzke's Resource (24,900 oz @ 5.2 g/t Au - 84% Indicated).

Overview of Drilling Programs

RC (22 holes, 1,958m) and diamond (12 holes, 1,328.9m) drilling programs have been completed at Metzke's North and Metzke's Find, with a focus on adding near-term production ounces as part of Dreadnought's Finding More Gold Faster strategy.

RC drilling was undertaken mainly to extend the current Resource at Metzke's Find into Metzke's North. Significant results include:

- MZRC174: **7m @ 8.6 g/t Au** from 8m,
including **1m @ 57.1 g/t Au** from 8m
- MZRC180: **2m @ 4.2 g/t Au** from 112m
- MZRC186: **2m @ 1.2 g/t Au** from 21m
- MZRC169: **3m @ 1.9 g/t Au** from 30m

Diamond drilling was undertaken to provide core for additional metallurgical test work and mine planning, and to extend and upgrade the Resource (already 84% Indicated) (4 twin and 8 extension holes). Importantly, 4 of the 8 extension holes intersected visible gold over intervals ranging from 0.55m – 2.94m in thickness.

Figure 3: Inset plan view map of Metzke's North showing the break in mineralisation due to a Proterozoic dyke in relation to current and previous drilling.

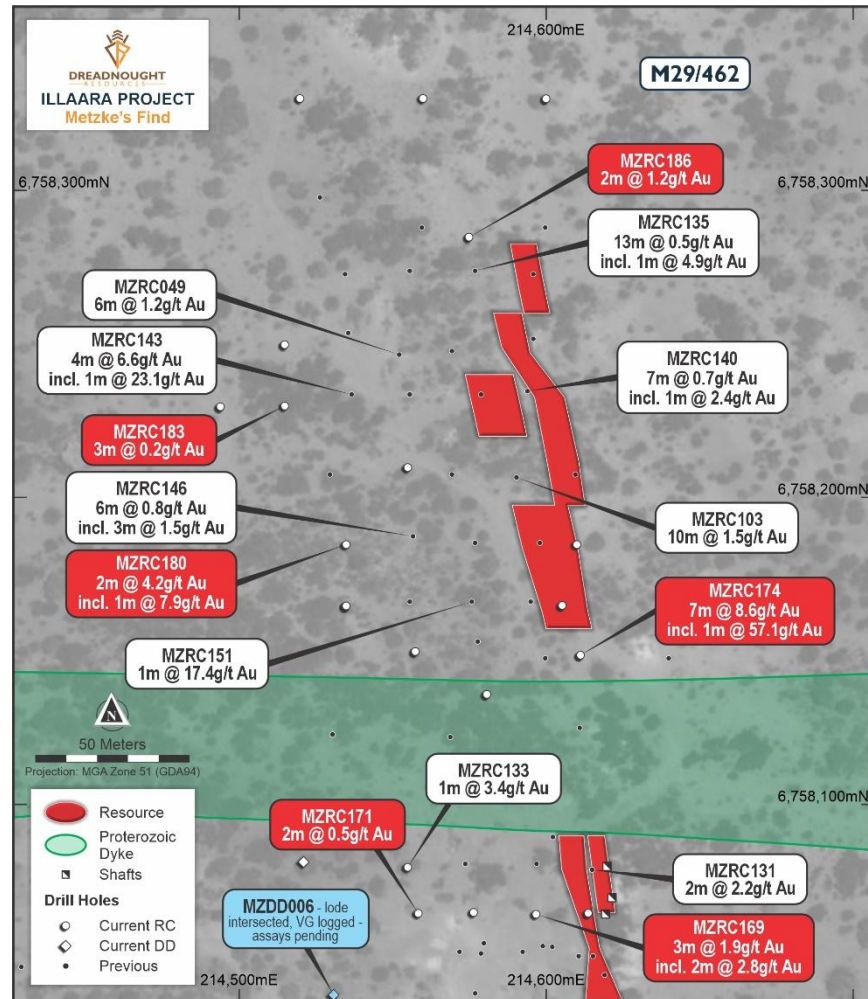


Table 1: Logged visible gold occurrences.

Hole ID	Type	Purpose	From	To	Lithology	Mineralisation	Visual Abundance	Prospect
MZDD003	DD	Twin	69.45	70.62	Sugary laminated quartz sulphide biotite vein	Visible gold	<1%	Metzke's Find
MZDD006	DD	Extension	136.32	137.50	Sugary laminated quartz sulphide biotite vein	Visible gold	<1%	
MZDD007	DD	Twin	51.91	52.72	Sugary laminated quartz sulphide chlorite vein	Visible gold	<1%	
MZDD009	DD	Twin	12.20	13.60	Mine Void			
MZDD010	DD	Extension	88.29	89.99	Sugary laminated quartz sulphide biotite vein	Visible gold	<1%	
MZDD012	DD	Extension	25.45	26.00	Sugary laminated quartz vein with iron oxide staining	Visible gold	<1%	
MZDD013	DD	Twin	64.97	67.45	Sugary laminated quartz vein with iron and manganese oxide staining	Visible gold	<1%	
MZDD014	DD	Extension	61.60	64.54	Sugary laminated quartz sulphide biotite vein	Visible gold	<1%	

Cautionary Statement

Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.

Diamond core is being cut and dispatched to ALS, Perth, for Photon Assay, with results to be reported upon receipt in accordance with the Company's continuous disclosure obligations. The Company anticipates that it will receive assays within 6-8 weeks.

The visible gold grains are typically <1mm in diameter but vary from pinhead to match-head size.

Background on Metzke's Find

Metzke's Find was discovered by a prospecting party in 1911. The remote location, being 160km from the nearest railhead, and lack of readily available fresh water limited follow up work. Metzke's Find was worked on a few occasions over the following decades for a recorded production of ~890 oz @ ~40 g/t Au. Metzke's Find comprises ~20 small, historic shafts over ~700m of strike.

The only significant exploration at Metzke's Find was in the late 1980s and early 1990s by junior gold explorers who drilled shallow percussion holes (average ~24m) which recorded a number of attractive results including:

MZI9: 2m @ 15.7 g/t Au from 19m

MZ23: 3m @ 11.7 g/t Au from 18m

Dreadnought acquired Metzke's Find in 2020 and has completed RC and diamond drilling which also delivered significant results including:

MZRC019: 4m @ 19.9 g/t Au from 45m

MZRC016: 3m @ 21.0 g/t Au from 85m

The mineralisation at Metzke's Find comprises quartz lodes hosted within a foliated mafic sequence and typically dips steeply to the west. Discrete zones of mineralisation are high-grade, 1–4m in thickness and strike north-south with an interpreted moderate north plunge of around 30°. A total of 5 separate mineralised zones are interpreted, likely representing shoots developed within a single planar shear.

In 2026, the Metzke's Find and Metzke's North Resource (84% Indicated) was updated with the majority of mineralisation being contained within 140m of surface. The current Resource is shown below.

Metzke's Find and Metzke's North — Indicated and Inferred Resources (ASX 23 June 2026)

Table 2: Resource (0.5 g/t Au cut-off grade) — Numbers may not add up due to rounding

Type	Indicated			Inferred			Total		
	Tonnes	Au (g/t)	Au (Oz)	Tonnes	Au (g/t)	Au (Oz)	Tonnes	Au (g/t)	Au (Oz)
Oxide	500	3.0	50	2,500	1.5	120	3,000	1.7	170
Transition	4,200	4.7	600	8,700	1.7	500	13,000	2.7	1,100
Fresh	102,100	6.1	20,100	32,000	3.5	3,600	134,000	5.5	23,600
Total	106,800	6.0	20,800	43,300	3.0	4,200	150,100	5.2	24,900

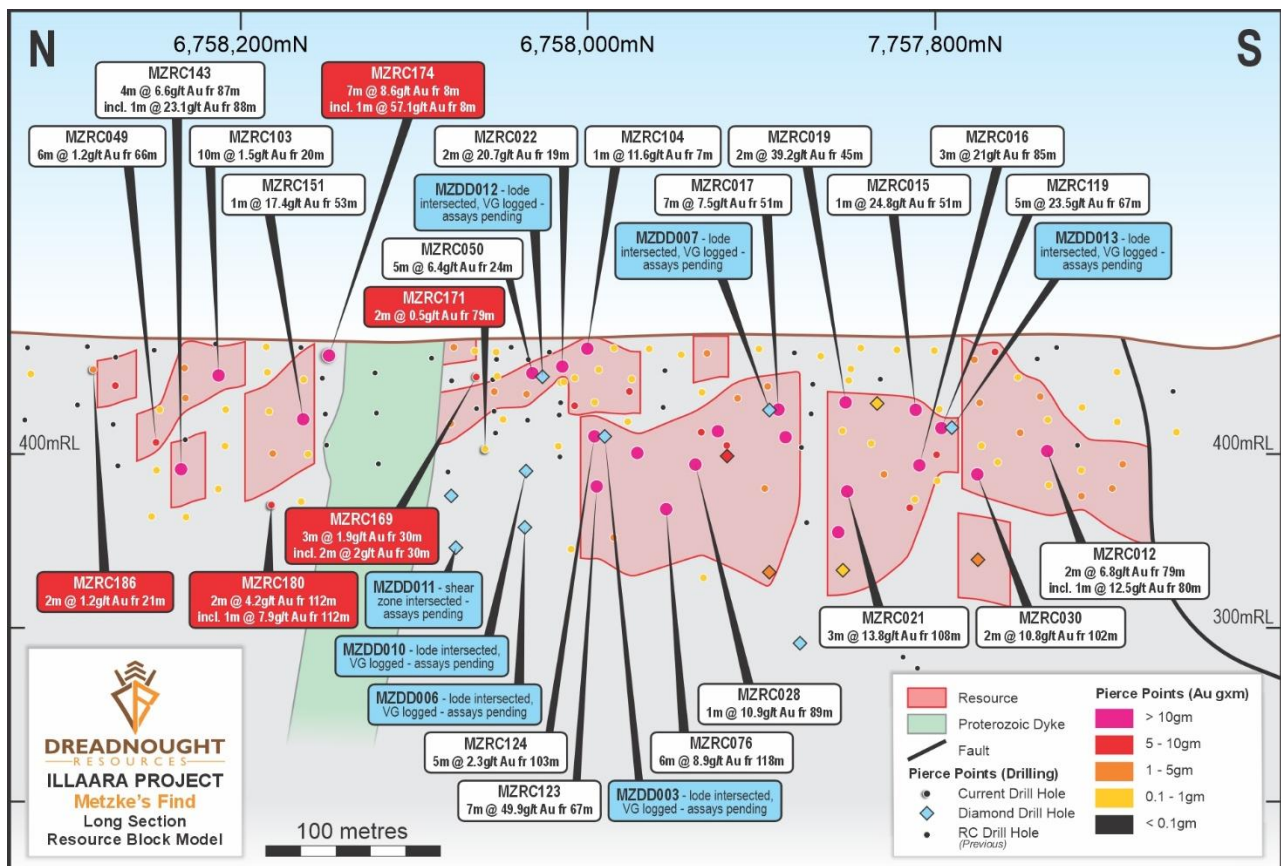


Figure 4: Long section of Metzke's Find/North showing the location of drill intercepts in relation to the current Resource outline.

Background on Illaara


Illara is a consolidated landholding covering ~800km² and ~70km strike of a greenstone belt located ~190km from Kalgoorlie. Illara is one of the most underexplored greenstone belts in the Yilgarn Craton and is situated near mills at Davyhurst (OBM.ASX) and Bottle Creek (Aurenne).

Historically gold was worked at Metzke's Find and the nearby Lawrence's Find in the early 1900s. However, the remoteness, lack of water and access hindered early prospecting.

Recent exploration within Illara was spurred on by a ~55km long Au-As-Sb anomaly generated from regional regolith sampling by the Geological Survey of Western Australia which led to Newmont acquiring Illara in 2016. Prior to Newmont, iron ore companies held the project as part of the Koolyanobbing Iron Ore Operation. Given the long history of iron ore mining in the region, Illara is well situated in relation to existing road and rail infrastructure.

Dreadnought acquired Illara from Newmont in 2019 and has consolidated the rest of the greenstone belt through a series of acquisitions. Early drilling by Dreadnought focused on the historical workings at Metzke's Find resulting in an initial high-grade Resource — since grown to 24,900 oz @ 5.2 g/t Au (84% Indicated) — that remains open along strike and at depth. Given the lack of systematic exploration, Illara presents a strong opportunity to make a major gold discovery within the world-renowned Yilgarn Craton.

Figure 5: Map showing the location of Illara relative to other gold operations and major players in the region.

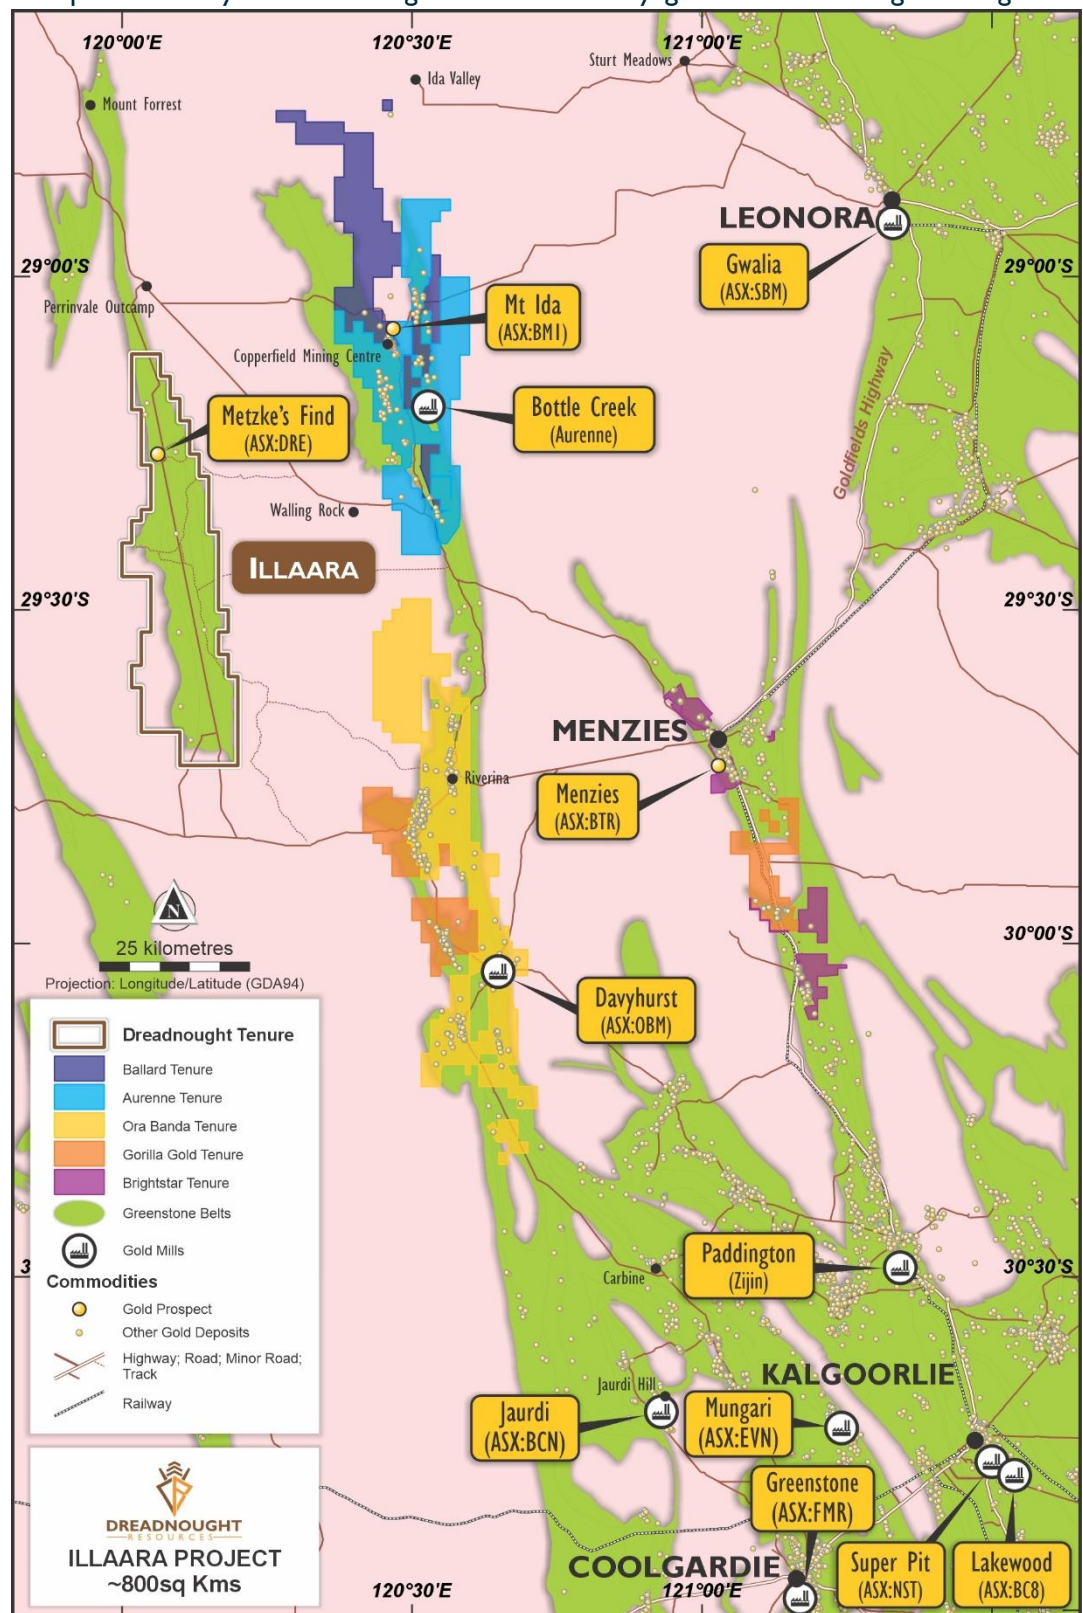

Dreadnought's work plan summary

	Sept 2026 Quarter	Dec 2026 Quarter	Mar 2027 Quarter
Star of Mangaroon	Approvals and commencement of mining, production, and processing through Paulsens Gold Operations (BC8 - JV)		
Mangaroon Discovery Drilling		RC drilling through defined targets	
Mangaroon Exploration	Target definition at Bordah, High Range North, High Range South, and Minga Bar camp scale targets		
Metzke's Find	RC, Diamond Drilling, Technical and Environmental Studies, Resource update and Scoping Study, Mining Proposal, and Closure Plan submission		
Illaara Exploration and Discovery	Air Core Drilling	Air Core & RC Drilling	
Gifford Creek	Yin REE study related work and mineralogical and metallurgical test-work for Stinger		

Upcoming News

- **October:** Further Results of target definition work - Mangaroon Gold
- **October:** Results of target generation work - Mangaroon South
- **October:** Upgrade JORC Exploration Target - Gifford Creek
- **October/November:** Results from infill air core drilling at Black Oak - Illaara Gold
- **October-December:** Results from first pass and infill air core drilling - Illaara Gold
- **November:** Results of diamond drilling at Metzke's Find - Illaara Gold
- **November:** Results from gold and tungsten target definition work - Mangaroon and Mangaroon South

For further information please refer to previous ASX announcements:

- 24 June 2019 75km Long Illaara Greenstone Belt Acquired from Newmont
- 6 December 2019 Consolidation of 75km Long Illaara Greenstone Belt
- 19 March 2020 RC Drilling Hits High Grades at Metzke's Find
- 13 July 2020 RC Drilling Hits High Grade Gold at Metzke's Find
- 25 September 2020 Further High-Grade Gold from Metzke's Find
- 27 April 2021 Illaara Update and Regional Target Generation
- 1 November 2022 Successful Drill Results Across Multiple Metals
- 27 April 2023 Initial High-Grade Gold Resource at Metzke's Find
- 3 February 2026 High-Grade Infill & Extensional Drilling — Illaara Gold
- 4 May 2026 Exceptional Gold recoveries from Metzke's Find
- 3 June 2026 Metzke's North Discovery
- 23 June 2026 94% Increase in High-Grade Indicated Resource, Metzke's Find

~Ends~

For further information please contact:

Dean Tuck
Managing Director
Dreadnought Resources Limited
E: dtuck@dreres.com.au

Jessamyn Lyons
Company Secretary
Dreadnought Resources Limited
E: jlyons@dreres.com.au

This announcement is authorised for release to the ASX by the Board of Dreadnought.

Snapshot — Illaara Gold (100%)

Illara Gold is Large Scale and Underexplored

- Illara covers over 70 strike km and ~800 km² of the Illara Greenstone Belt within the richly endowed Yilgarn Craton of Western Australia.
- The Illara Greenstone Belt is one of the most underexplored and under-drilled greenstone belts in the Yilgarn providing plenty of space for a major discovery.
- Covering ~800 km², it is a significant consolidated landholding within a tightly held and highly prospective gold province.

Consolidation Provides for First Ever Modern Exploration

- All historical workings and known gold occurrences relate to outcropping mineralisation. There has been minimal historical and modern exploration due to remoteness and iron ore exploration.
- 2026 is seeing the first ever systematic air core drilling program undertaken across the belt, a drilling program that previous owners Newmont wanted to undertake prior to Dreadnought acquiring the project in 2019 and consolidating the remainder of the belt.

Significant, Step-change, Growth Potential

- Illara contains multiple highly prospective structural corridors with known gold anomalism providing near term drilling targets and discovery potential.
- Dreadnought is deploying modern geochemical and geophysical techniques to explore for mineralisation under shallow cover.

Shallow, High-grade Gold at Metzke's Find

- The Resource at Metzke's contains **shallow, high-grade gold** which provides a strong foundation for the project.
- Mineralisation at Metzke's Find remains open along strike and at depth.

Metzke's Find — Indicated and Inferred Resources (ASX 23 June 2026)

Table 3: Resource (0.5 g/t Au cut-off grade) — Numbers may not add up due to rounding

Type	Indicated			Inferred			Total		
	Tonnes	Au (g/t)	Au (Oz)	Tonnes	Au (g/t)	Au (Oz)	Tonnes	Au (g/t)	Au (Oz)
Oxide	500	3.0	50	2,500	1.5	120	3,000	1.7	170
Transition	4,200	4.7	600	8,700	1.7	500	13,000	2.7	1,100
Fresh	102,100	6.1	20,100	32,000	3.5	3,600	134,000	5.5	23,600
Total	106,800	6.0	20,800	43,300	3.0	4,200	150,100	5.2	24,900

Self-Funded Explorer Strategy — Pathway to Production

- Dreadnought's strategy is to transform into a self-funded explorer. This includes a high-grade open pit at Metzke's Find where funding, development, haulage & processing are outsourced to third parties. This is a common model in WA given the robust gold price. In this way, there is reduced reliance on market funding and internal cashflow can be directed towards exploration for new discoveries.

Mangaroon Project

Mangaroon covers ~5,000kms² and is located 250kms south-east of Exmouth in the Gascoyne Region of WA. Since 2020, Dreadnought has identified three major focus areas within the Mangaroon Project:

Mangaroon Gold (100%)

Outcropping gold mineralisation was first identified and mined at Mangaroon by local pastoralists and prospectors in the 1960s and has seen no modern gold exploration. Dreadnought has consolidated this gold field and is undertaking the first modern exploration across the region which has identified five camp scale gold opportunities at Bordah, High Range, Alma, Minga Bar and Star of Mangaroon.

In addition, the project contains granted mining leases that provide an opportunity for cashflow including the Star of Mangaroon Mine where Dreadnought has delivered a 27,000 oz Resource at 11.1 g/t Au (98% Measured and Indicated)

Gifford Creek Critical Metals (100%)

Dreadnought discovered the Yin Ironstones and the Gifford Creek Carbonatite in 2021. Since then, the Gifford Creek Carbonatite Complex has emerged as a globally significant, rapidly growing, potential source of critical minerals. Highlights include:

- Discovery of the Yin REE Ironstone Complex and delivery of a 30.0Mt @ 1.04% TREO Resource over only ~4.6kms – including a Measured and Indicated Resource of 26.3Mt @ 1.04% TREO (ASX 30 Nov 2023).
- Discovery of the globally significant, Nb-REE-P-Ti-Sc enriched Gifford Creek Carbonatite (ASX 7 Aug 2023).
- Delivery of a large, independent initial Resource of 10.8Mt @ 1.00% TREO at the Gifford Creek Carbonatites, containing a range of critical minerals including rare earths, niobium, phosphate, titanium and scandium (ASX 28 Aug 2023).
- Discovery of Stinger Nb-REE-P-Ti-Sc-Zr bearing carbonatite and delivery of the Stinger Niobium Exploration Target (ASX 3 Mar 2025, 29 Sept 2025).

Money Intrusion Ni-Cu-PGEs (Teck Earn-In)

The Money Intrusion is a ~45km long mafic intrusion prospective for Ni-Cu-PGE massive sulphides. In 2023, Dreadnought discovered high tenor nickel-copper massive sulphides confirming the potential of this new system. Dreadnought entered into a \$15M Farm-In and Joint Venture agreement with Teck Resources, a leading Canadian resource company, to earn up to 75% of the Money Intrusion tenements.

Ililaara Gold Project (100%)

Ililaara is located ~190km northwest of Kalgoorlie in the Yilgarn Craton. The project comprises ~800km² covering ~70km of strike along the Ililaara greenstone belts. Ililaara was acquired off Newmont in 2019 as an early stage exploration project prospective for typical Archean mesothermal lode gold deposits. Dreadnought has delivered a 24,900 oz @ 5.2 g/t Au Resource at Metzke's Find (84% Indicated). Prior to consolidation by Dreadnought, Ililaara was predominantly held by iron ore explorers and remains highly prospective for iron ore amongst other commodities.

Kimberley Cu-Au-Sb Project (Tarraji 80% / Yampi 100%)

Tarraji-Yampi covers ~420km² and is located only 85kms from Derby in the West Kimberley region of WA and was locked up as a Defence Reserve since 1978. The project has outcropping mineralisation and historical workings which have seen no modern exploration.

In 2021, Dreadnought discovered high grade Cu-Au massive sulphides at Orion with results to date indicating a large scale, Proterozoic Cu-Au VMS system at Tarraji-Yampi, similar to DeGrussa and Monty in the Bryah Basin.

In addition, the project contains outcropping high-grade Cu-Ag-Sb-Bi Veins at Rough Triangle and Grant's Find.



Cautionary Statement

This announcement and information, opinions or conclusions expressed in the course of this announcement contains forecasts and forward-looking information. Such forecasts, projections and information are not a guarantee of future performance, involve unknown risks and uncertainties. Actual results and developments will almost certainly differ materially from those expressed or implied. There are a number of risks, both specific to Dreadnought, and of a general nature which may affect the future operating and financial performance of Dreadnought, and the value of an investment in Dreadnought including and not limited to title risk, renewal risk, economic conditions, stock market fluctuations, commodity demand and price movements, timing of access to infrastructure, timing of environmental approvals, regulatory risks, operational risks, reliance on key personnel, reserve estimations, native title risks, cultural heritage risks, foreign currency fluctuations, and mining development, construction and commissioning risk.

Competent Person's Statement — Mineral Resources

The information in this announcement that relates to the Star of Mangaroon, Orion and Metzke's Find Mineral Resource is based on information compiled by Mr. Shaun Searle, a Competent Person who is a Member of the Australian Institute of Geoscientists. Mr. Searle is an employee of Ashmore Advisory Pty Ltd. Mr. Searle has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that is being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Minerals Resources and Ore Reserves'. Mr. Searle consents to the inclusion in the announcement of the matters based on his information in the form and context that the information appears in relation to Mineral Resource estimates.

Competent Person's Statement — Exploration Results

The information in this announcement that relates to geology, exploration results and planning, and exploration targets was compiled by Mr. Dean Tuck who is a Member of the AIG, Managing Director, and shareholder of the Company. Mr. Tuck has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr. Tuck consents to the inclusion in the announcement of the matters based on the information in the form and context in which it appears.

The Company confirms that it is not aware of any further new information or data that materially affects the information included in the original market announcements by Dreadnought Resources Limited referenced in this report and in the case of Mineral Resources, Production Targets, forecast financial information and Ore Reserves, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcements continue to apply and have not materially changed. To the extent disclosed above, the Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

Resources Summary

Star of Mangaroon — Indicated and Inferred Resources (ASX 27 November 2024)

Table 4: Resource (2 g/t Au cut-off grade) — Numbers may not add up due to rounding. *Surface reported at a 0.5 g/t Au cut-off.

Type	Measured			Indicated			Inferred			Total		
	Tonnes	Au (g/t)	Au (Oz)	Tonnes	Au (g/t)	Au (Oz)	Tonnes	Au (g/t)	Au (Oz)	Tonnes	Au (g/t)	Au (Oz)
Surface*							8,300	1.0	300	8,300	1.0	300
Transition	6,300	24.9	5,100	3,300	6.5	700				9,600	18.6	5,800
Fresh	33,200	13.5	14,400	23,500	8.5	6,400	1,000	5.1	200	57,700	11.3	21,000
Total	39,500	15.3	19,400	26,800	8.2	7,100	9,300	1.4	400	75,600	11.1	27,000

Metzke's Find — Indicated and Inferred Resources (ASX 23 June 2026)

Table 5: Resource (0.5 g/t Au cut-off grade) — Numbers may not add up due to rounding

Type	Indicated			Inferred			Total		
	Tonnes	Au (g/t)	Au (Oz)	Tonnes	Au (g/t)	Au (Oz)	Tonnes	Au (g/t)	Au (Oz)
Oxide	500	3.0	50	2,500	1.5	120	3,000	1.7	170
Transition	4,200	4.7	600	8,700	1.7	500	13,000	2.7	1,100
Fresh	102,100	6.1	20,100	32,000	3.5	3,600	134,000	5.5	23,600
Total	106,800	6.0	20,800	43,300	3.0	4,200	150,100	5.2	24,900

Yin Ironstone Complex — Yin, Yin South, Y2, Sabre Measured, Indicated and Inferred Resources (ASX 30 November 2023)

Table 6: Summary of Yin Resources at 0.20% TREO Cut off.

Type	Measured			Indicated			Inferred			Total			
	Tonnes (Mt)	TREO (%)	TREO (kt)	Tonnes (Mt)	TREO (%)	TREO (t)	Tonnes (Mt)	TREO (%)	TREO (t)	Tonnes (Mt)	TREO (%)	TREO (t)	NdPr:TREO Ratio (%)
Oxide	2.47	1.61	39.7	13.46	1.06	142.6	1.51	0.75	11.2	17.44	1.11	193.6	29
Fresh	2.70	1.09	29.5	7.67	0.95	72.8	2.17	0.75	16.3	12.54	0.95	118.7	29
Total	5.17	1.34	69.3	21.13	1.02	215.4	3.68	0.75	27.6	29.98	1.04	312.3	29

Table 7: Summary of Yin Resources at 1.00% TREO Cut off.

Type	Measured			Indicated			Inferred			Total			
	Tonnes (Mt)	TREO (%)	TREO (kt)	Tonnes (Mt)	TREO (%)	TREO (t)	Tonnes (Mt)	TREO (%)	TREO (t)	Tonnes (Mt)	TREO (%)	TREO (t)	NdPr:TREO Ratio (%)
Oxide	1.60	2.22	35.6	5.34	1.99	106.4	0.26	1.67	4.3	7.20	2.03	146.3	30
Fresh	1.36	1.68	22.8	2.65	1.81	47.9	0.42	1.72	7.3	4.43	1.76	78.0	29
Total	2.96	1.97	58.4	7.99	1.93	154.3	0.68	1.70	11.6	11.63	1.93	224.3	29

Gifford Creek Carbonatite — Inferred Resource (ASX 28 August 2023)

Table 8: Summary of the Gifford Creek Carbonatite Inferred Resource at various % TREO Cut offs.

Cut-Off (%TREO)	Resource (Mt)	TREO (%)	NdPr:TREO (%)	Nb2O5 (%)	P2O5 (%)	TiO2 (%)	Sc (ppm)	Contained TREO (t)	Contained Nb2O5 (t)
0.70	10.84	1.00	21	0.22	3.5	4.9	85	108,000	23,700

Table 9: Drill Collar Data (GDA94 MGAz50) and Significant Intercepts (>0.1 g/t Au)

Table 7: Drill Core Data (GDA74 MGA250) and Significant Intercepts (>0.1 g/t Au)												Prospect
Hole ID	Easting	Northing	RL	Dip	Azi	EOH	Type	From	To	Interval (m)	Grade (g/t Au)	
MZRC168	214615	6758067	468	-54	95.0	60	RC	9	10	1	0.1	Metzke's Find
MZRC169	214598	6758066	468	-54	89.7	60	RC	30	33	3	1.9	
MZRC170	214577	6758067	468	-53	90.4	84	RC	-				
MZRC171	214559	6758067	469	-54	93.6	108	RC	79	81	2	0.5	
MZRC172	214558	6758083	468	-55	89.2	110	RC	-				
MZRC173	214582	6758138	469	-55	90.8	84	RC	-				
MZRC174	214612	6758151	469	-54	90.3	24	RC	8	15	7	8.6	
including								8	9	1	57.1	
MZRC175	214558	6758152	469	-54	87.2	96	RC	-				
MZRC176	214606	6758167	469	-54	90.0	30	RC	-				
MZRC177	214538	6758167	469	-54	87.6	79	RC	-				
MZRC178	214541	6758167	469	-54	89.1	86	RC	-				
MZRC179	214611	6758187	469	-54	91.8	24	RC	-				
MZRC180	214536	6758187	470	-55	92.2	126	RC	112	114	2	4.2	
and								98	99	1	0.4	
MZRC181	214542	6758166	469	-54	89.2	120	RC	98	99	1	0.1	
MZRC182	214556	6758211	470	-55	89.8	90	RC	73	74	1	0.1	
MZRC183	214516	6758232	470	-55	88.1	144	RC	120	123	3	0.2	
and								135	138	3	0.2	
MZRC184	214495	6758228	470	-56	94.7	174	RC	-				
MZRC185	214516	6758251	470	-54	86.9	150	RC	141	144	3	0.1	
MZRC186	214577	6758287	471	-55	90.6	60	RC	21	23	2	1.2	
MZRC187	214601	6758330	471	-54	91.0	81	RC	-				
MZRC188	214560	6758331	472	-55	89.3	84	RC	42	43	1	0.2	
MZRC189	214519	6758331	472	-54	93.9	84	RC	-				
MZDD003	214571	6757997	468	-54	91.5	88.2	DDH	Assays Pending				
MZDD004	214531	6757956	468	-60	90.9	178	DDH					
MZDD005	214566	6758034	468	-55	34.1	145.5	DDH					
MZDD006	214531	6758038	469	-60	90.1	143.1	DDH					
MZDD007	214601	6757896	467	-60	91.0	56.9	DDH					
MZDD008	214510	6757884	468	-59	90.1	217.3	DDH					
MZDD009	214616	6758000	468	-55	90.0	20	DDH					
MZDD010	214561	6758035	468	-59	89.5	115	DDH					
MZDD011	214521	6758082	469	-60	91.0	156.47	DDH					
MZDD012	214605	6758031	468	-55	90.8	40.3	DDH					
MZDD013	214599	6757800	468	-56	92.5	77.8	DDH					
MZDD014	214647	6757996	467	-59	270.5	90.3	DDH					

JORC Code, 2012 Edition — Table I Report Template

Section I Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling	Reverse Circulation (RC) drilling was undertaken to produce samples for assay. RC Drilling Two sampling techniques were utilised for the RC drilling, 1m metre splits directly from the rig sampling system for each metre and 3m composite sampling from spoil piles. Samples submitted to the laboratory were determined by the site geologist. 1m Splits From every metre drilled a 2–3kg sample (split) was sub-sampled into a calico bag via a Metzke cone splitter from each metre of drilling. 3m Composites All remaining spoil from the sampling system was collected in buckets from the sampling system and neatly deposited in rows adjacent to the rig. An aluminium scoop was used to then sub-sample each spoil pile to create a 2–3kg 3m composite sample in a calico bag.

Criteria	JORC Code explanation	Commentary
	problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	A pXRF is used on site to help determine mineralised samples. Mineralised intervals have the 1m split collected, while unmineralised samples have 3m composites collected. All samples are submitted to ALS Laboratories in Perth for determination of gold by Photon assay from crushed sample (ALS Method Au-PA01). Select samples are also submitted for 48 multi-elements via 4 acid digestion with MS/ICP finish (ALS Code ME-MS61) to assist with lithological interpretation. QAQC samples consisting of duplicates, blanks and CRM's (OREAS Standards) are inserted through the program at a rate of 1:50 samples.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	RC Drilling Drilling was completed by Precision Exploration Drilling (PXD) utilising a KWL 350 truck mounted drill rig with additional air from an auxiliary compressor and booster. Bit size was 5 3/4".
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	RC Drilling Drilling was undertaken using a 'best practice' approach to achieve maximum sample recovery and quality through the mineralised zones. Best practice sampling procedure included: suitable usage of dust suppression, suitable shroud, lifting off bottom between each metre, cleaning of sampling equipment, ensuring a dry sample and suitable supervision by the supervising geologist to ensure good sample quality.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. - The total length and percentage of the relevant intersections logged.	RC Drilling RC chips were logged under the supervision of a Senior Geologist with sufficient experience in this geological terrane and relevant styles of mineralisation using an industry standard logging system which could eventually be utilised within a Mineral Resource Estimation. Lithology, mineralisation, alteration, veining, weathering and texture were all recorded digitally. Chips were washed each metre and stored in chip trays for preservation and future reference. RC pulp material is also analysed on the rig by pXRF, and magnetic susceptibility meter to assist with logging and the identification of mineralisation. RC logging is qualitative, quantitative or semi-quantitative in nature.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	RC Drilling From every metre drilled, a 2–3kg sample (split) was sub-sampled into a calico bag via a Metzke cone splitter. QAQC in the form of duplicates and CRM's (OREAS Standards) were inserted through the ore zones at a rate of 1:50 samples. Additionally, within mineralised zones, a duplicate sample was taken and a blank inserted directly after. 2–3kg samples are submitted to ALS laboratories (Perth), oven dried to 105°C and crushed to >90% passing 3mm to produce a 500g charge for determination of gold by Photon Assay from crushed sample (ALS Method Au-PA01). Additional material is then pulverised to 85% passing 75um to produce a 0.25g charge for determination of 48 multi-elements via 4 acid digestion with MS/ICP finish (ALS Code ME-MS61). Standard laboratory QAQC is undertaken and monitored.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	Laboratory Analysis Photon Assay is considered a total analysis and Method Au-PA01 is appropriate for Au determination. ME-MS61 is considered a near total digest and is appropriate for pathfinder determination. Standard laboratory QAQC is undertaken and monitored by the laboratory and by the company upon assay result receipt.

Criteria	JORC Code explanation	Commentary
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	Logging and Sampling Logging and sampling were recorded directly into a digital logging system, verified and eventually stored in an offsite database. Significant intersections are inspected by senior company personnel. No diamond twinning has been undertaken at this time. . No adjustments to any assay data have been undertaken. Additional 1m splits have been sent to the lab for the 3m composites that have returned mineralisation. And all mineralised intervals will be reassayed by PhotonAssay Technique.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	Collar position was recorded using a Emlid Reach RS2 RTK GPS system (+/- 0.3m x/y, +/-0.5m z). GDA94 Z50s is the grid format for all xyz data reported. Azimuth and dip of the drill hole was recorded by PXD after the completion of the hole using an Axis Champ Gyro. A reading was undertaken every 20th metre with an accuracy of +/- 0.75° azimuth and +/-0.15° dip.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	Data spacing of drill results is varied. Drill spacing at Metzke's North is not suitable for Mineral Resource Estimation. Drilling at Metzke's Find is of adequate spacing and distribution to review the already published Metzke's Find Resource. Both 3m scoop composites and 1m splits are collected.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	Drilling was undertaken at a near perpendicular angle to the interpreted strike and dip of the mineralised lode. No sample bias is known at this time. True widths are estimated to be between 70–90% of down hole lengths.
Sample security	The measures taken to ensure sample security.	All geochemical samples were collected, bagged, and sealed by Dreadnought staff and were delivered directly to ALS Laboratories Kalgoorlie by Dreadnought Contractors and/or Personnel.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	The program is continuously reviewed by senior company personnel.

Section 2 Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The Illaara Project consists of 11 granted Exploration Licenses (E29/957, E29/959, E29/965, E29/1050, E29/1153, E29/1204, E29/1205, E30/471, E30/476, E30/485, E30/554), 1 pending Exploration License (E30/558) and 1 pending Mining License (M29/462). All tenements are 100% owned by Dreadnought Resources. Tenements E30/471, E30/476, E29/957 and E29/959 are subject to a 1% NSR retained by Newmont. E29/1050 and M29/462 are subject to a 1% NSR retained by Gianni, Peter Romeo. There are currently no clear Native Title Claims over the Illaara Project. Part of the Illaara Project is located on Walling Rock Station.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	Newmont Exploration has undertaken exploration activities from 2016-2019 which are mentioned in previous reports. Historical exploration of a sufficiently high standard was

Criteria	JORC Code explanation	Commentary
		carried out by numerous parties which have been outlined and detailed in previous ASX announcements: Eastern Group 1988: WAMEX Report A22743 Anglo Australian 1995: WAMEX Report A45251 Polaris 2006-2007: WAMEX Report A75477
Geology	Deposit type, geological setting and style of mineralisation.	The Illaara Project is located within the Illaara Greenstone Belt within the Southern Cross Domain of the Youanmi Terrane approximately 60kms west of the Ida Fault; The Illaara Project is prospective for orogenic gold, iron ore, LCT pegmatites, VMS and komatiite hosted nickel mineralisation; Mineralisation at Metzke's is quartz vein hosted within sheared undifferentiated mafic rocks.
Drill hole information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	An overview of the drilling program is given within the text and tables within this document.
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	All sample intervals with a minimum length of 1m and assays greater than 0.1 g/t Au have been reported. No top cuts have been applied to exploration results. No metal equivalents are reported.
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	All intercepts are reported as downhole lengths. Drilling was undertaken at a near perpendicular angle to the interpreted strike and dip of the mineralised lodes. True widths are estimated to be between 70–90% of down hole lengths.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to figures within this report.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	The accompanying document is a balanced report with a suitable cautionary note. Figures within the announcement show the location and results of all drilling data within the reported area.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	Suitable commentary of the geology encountered are given within the text of this document.

Criteria	JORC Code explanation	Commentary
Further work	- The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Diamond drilling Metallurgical and geotechnical surveys Resource Update Economic Studies