



Ausmon Resources Limited
 ABN 88 134 358 964
 Suite 1312, 87-89 Liverpool Street
 Sydney NSW 2000, Australia
 PO Box 20188, World Square, NSW 2002
 T: +61 2 9264 6288
 E: office@ausmonresources.com.au
 W: www.ausmonresources.com.au



19th October 2026

ASX Market Announcements

BASE METALS ASSAY RESULTS FOR ENMORE PROJECT IN NEW SOUTH WALES

Ausmon Resources Limited ("Company") is pleased to announce the assay results received from the recent field-based exploration for Base Metals ("BM") within EL 9220 Enmore near Broken Hill in western New South Wales (**Figure 1**).

Significant Exploration Rock Results

Prospect	Sample ID	Assays Method MEICP61 ALS LAB			
Diesel	26ENRC068	1,350ppm Zn	1,100ppm Ba	290ppm Mn	
Diesel	26ENRC072	1,095ppm Zn	163ppm Pb	1,480ppm Ba	
Diesel	26ENRC063	933ppm Zn	2,030ppm Ba	186ppm Mn	
Diesel	26ENRC060	4.7g/t Ag	317ppm Zn	600ppm Pb	1,290ppm Ba
Diesel	26ENRC080	1.2g/t Ag	316ppm Pb	2,190ppm Ba	
Diesel	26ENRC070	267ppm Cu	310ppm Pb	718ppm Cu	1,340ppm Ba
Diesel	26ENRC081	0.1g/t Ag	4,480ppm Ba	160ppm Pb	
Diesel	26ENRC082	5,370ppm Ba	403ppm Mn	125ppm Cu	129ppm Pb

Zn = zinc, Ba = barium, Mn = manganese, Ag = silver, and Pb = lead

Significant Exploration Soil Results

70 to 113ppm Zn and 380 to 540ppm Ba in the northern and southern parts of the Soil Survey Grid within the Diesel Prospect.

The Enmore tenement covers an area of 341 km² within the Curnamona Province, 50 km south of Broken Hill accessible via the sealed Silver City Highway then via Ascot Vale tracks and fence lines.

The field exploration comprised soil and rock sampling on 250m x 250m grids across the Pine Creek and Diesel (previously referred to as West Enmore) Prospects. Limited work was completed at the Pine Creek Prospect due to rain and therefore only the results on the Diesel Prospect are detailed in this report. Samples collected were initially scanned by the Olympus Delta pXRF and those samples with elevated base metal geochemistry were sent to ALS laboratory in Adelaide for multi-element (ME ICP61) analyses. A total of 30 rock and 23 soil samples were sent to ALS in Adelaide.

The Enmore tenement is located in the Thackaringa Group and underlying gneissic sequence located stratigraphically below the Broken Hill Group that hosts the world class Broken Hill

Orebody Pb Zn Ag orebody currently being mined adjacent and to the south of Broken Hill township.

The tenement is dominated by the Redan and Edna Gneiss in the east and Mulcula and Cues Formations in the west (**Figure 2**). The Pine Creek areas were selected based on NE SW shear zones (shown in blue) intersecting favourable stratigraphic settings including surface gossans. Both the Pine Creek and Diesel Prospects are intersected by NE SW shear zones. **Figure 3** is a magnetic image highlighting the NE SW structures that trend through the Pine Creek and Diesel Prospects and are associated with NE SW linear magnetic highs that could be targets for base metal mineralisation.

The Diesel Prospect (referred to as West Enmore Prospect on the maps in **Figures 1 and 2**) is indicated to be prospective according to the Significant Exploration Rock Results summarised above with several elevated Zn, Pb and Ag results, and some very high Ba results. Ba is potentially a vector element for base metal mineralisation.

The surficial exploration sampling has been confined to areas of outcrop and skeletal soil cover as shown by the warm colours. When exploration extends beyond the outcrop/shallow cover areas other exploration methods such as shallow air core drilling and/or ground magnetics will be considered.

*A Brovey Image is a pan sharpened Landsat Satellite image that combines high resolution black and white satellite spectral imagery with lower resolution satellite colour imagery to produce a "regolith" pseudo image that classifies areas of outcrop and sub crop as warmer colours (red, brown and orange etc) and areas of depositional cover as cooler colours (blue and green). The Brovey image in **Figure 4** shows the area of outcrop within the Diesel Soil Grid Area with further outcrop areas to the south and east yet to be explored.*

The contoured soil geochemistry results are presented in **Figures 5 and 6**, together with the corresponding Ba and Zn rock assay data. The results indicate broadly elevated Zn concentrations in soils in the northern and southern parts of the survey grid, coinciding with elevated Zn and Ba values in rock samples. However, this interpretation is based on a limited dataset and should be considered preliminary.

Further surficial exploration is required to better define the extent of the anomalism and to improve understanding of the structural controls on mineralisation. Planned work will include additional soil sampling across outcrop and subcrop areas, together with thin-section petrographic analysis of selected rock samples to investigate the distribution and source of the elevated Ba values.

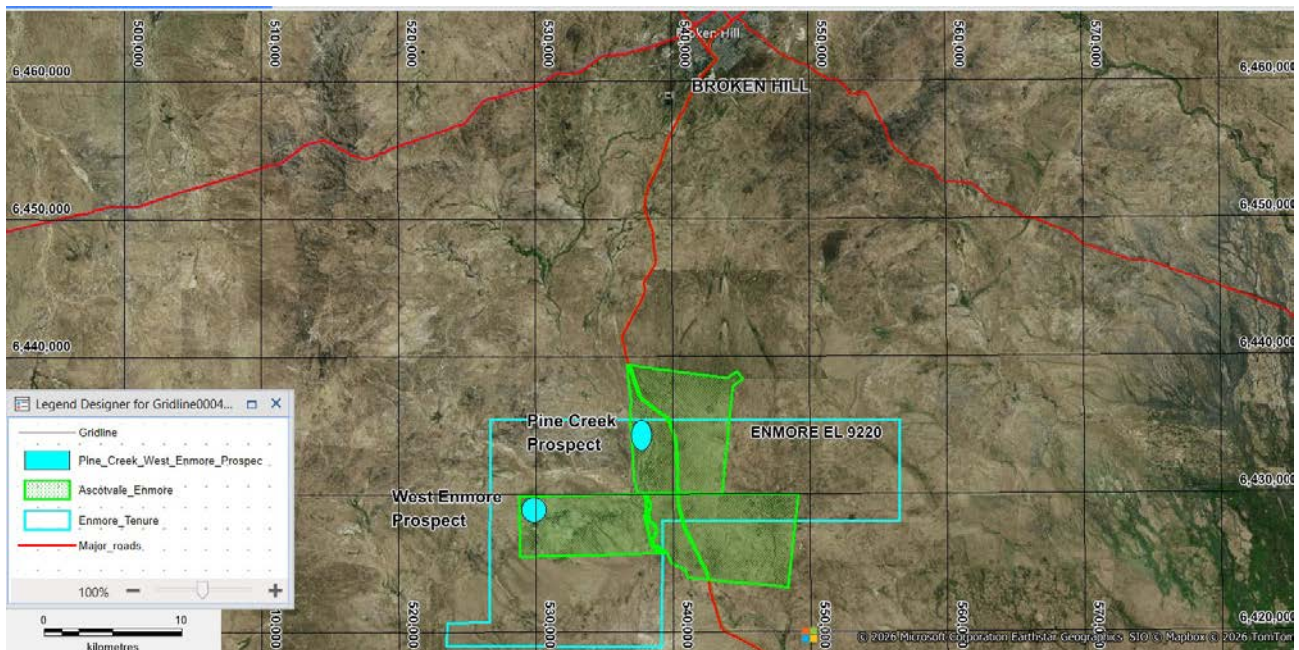


Figure 1: Location of Enmore Tenement and Prospects – West Enmore renamed Diesel

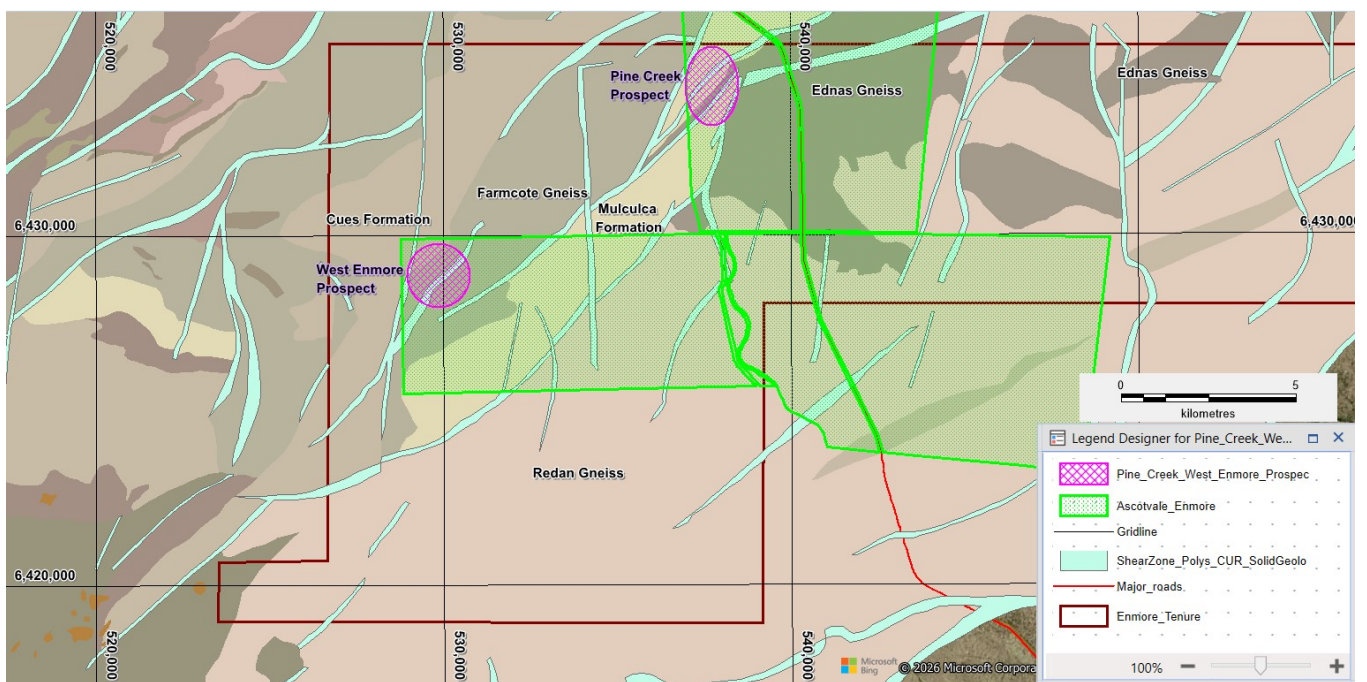


Figure 2: Enmore Solid Geology and Prospects

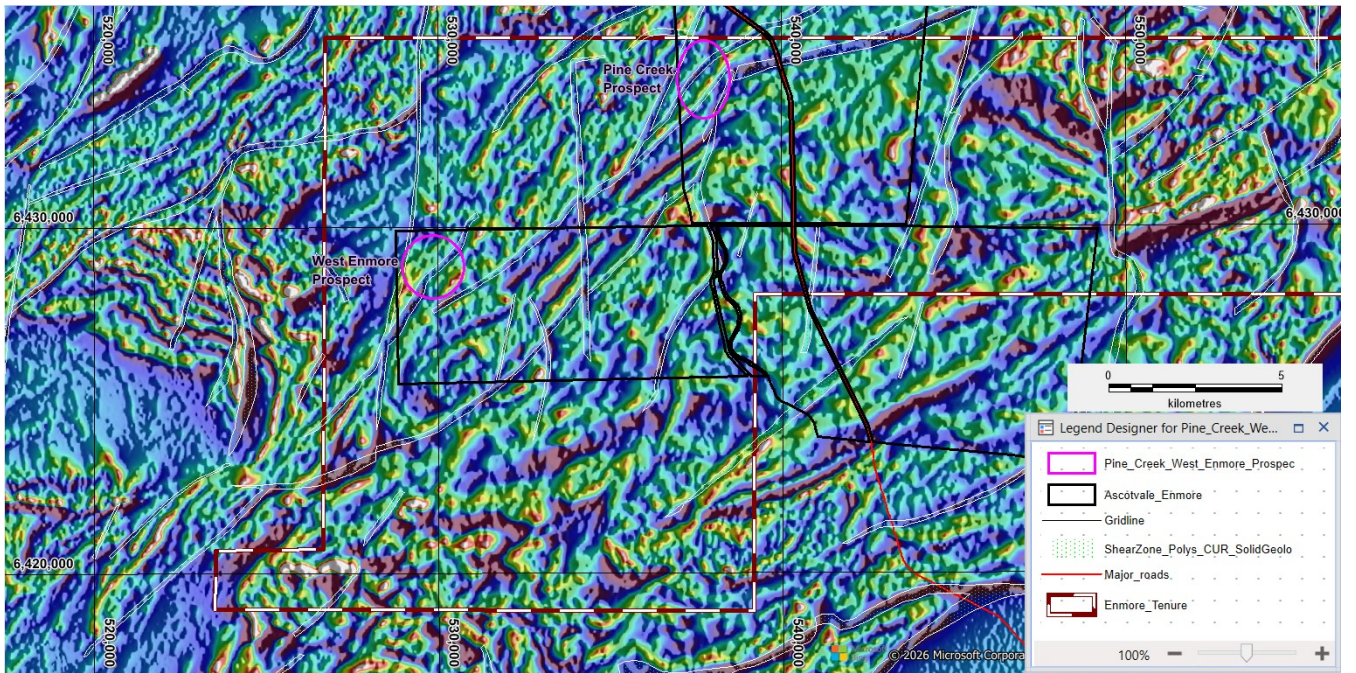


Figure 3: Enmore Magnetics and Prospects

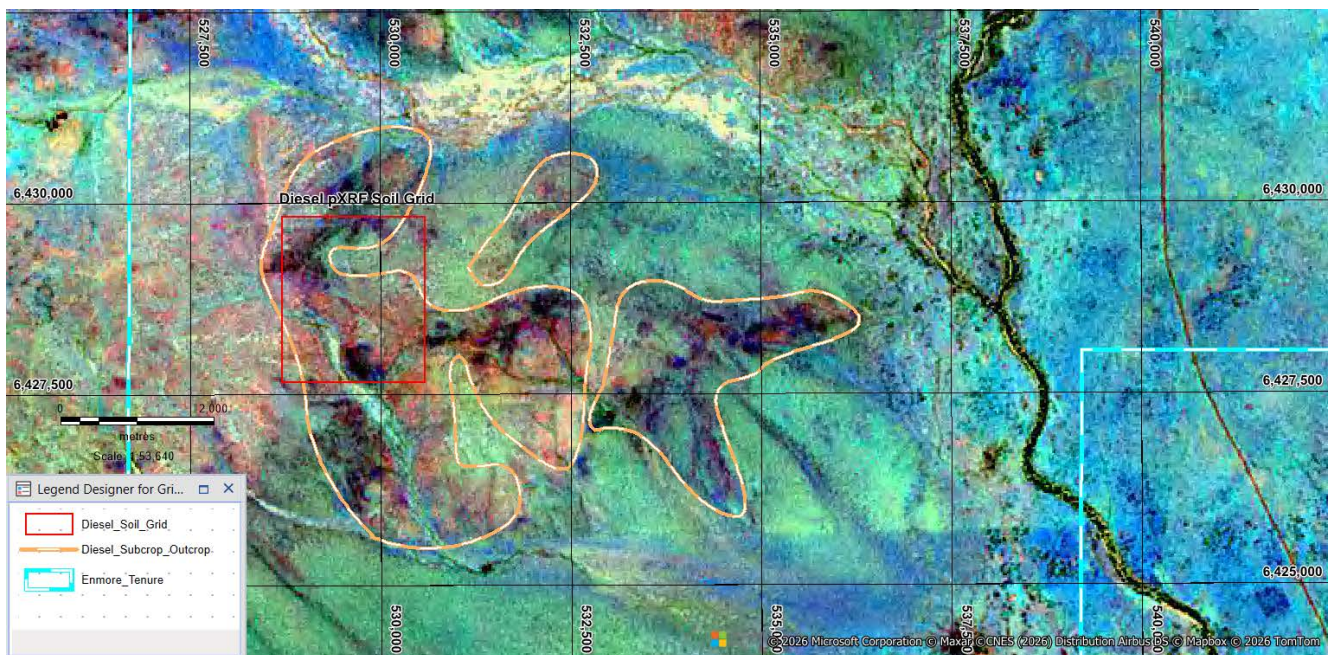


Figure 4: Diesel Prospect Landsat Brovey Image showing Outcrop/Sub Crop Area

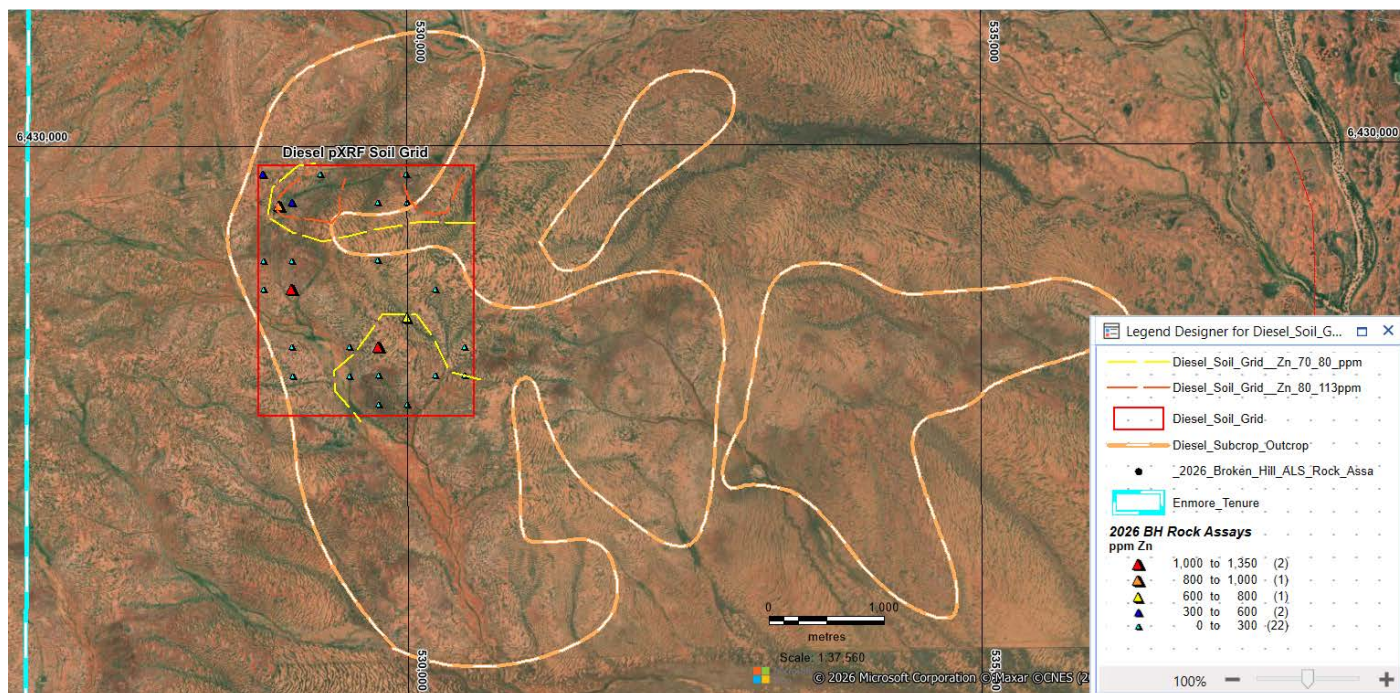


Figure 5: Diesel Prospect showing outcropping areas and Zn in rocks

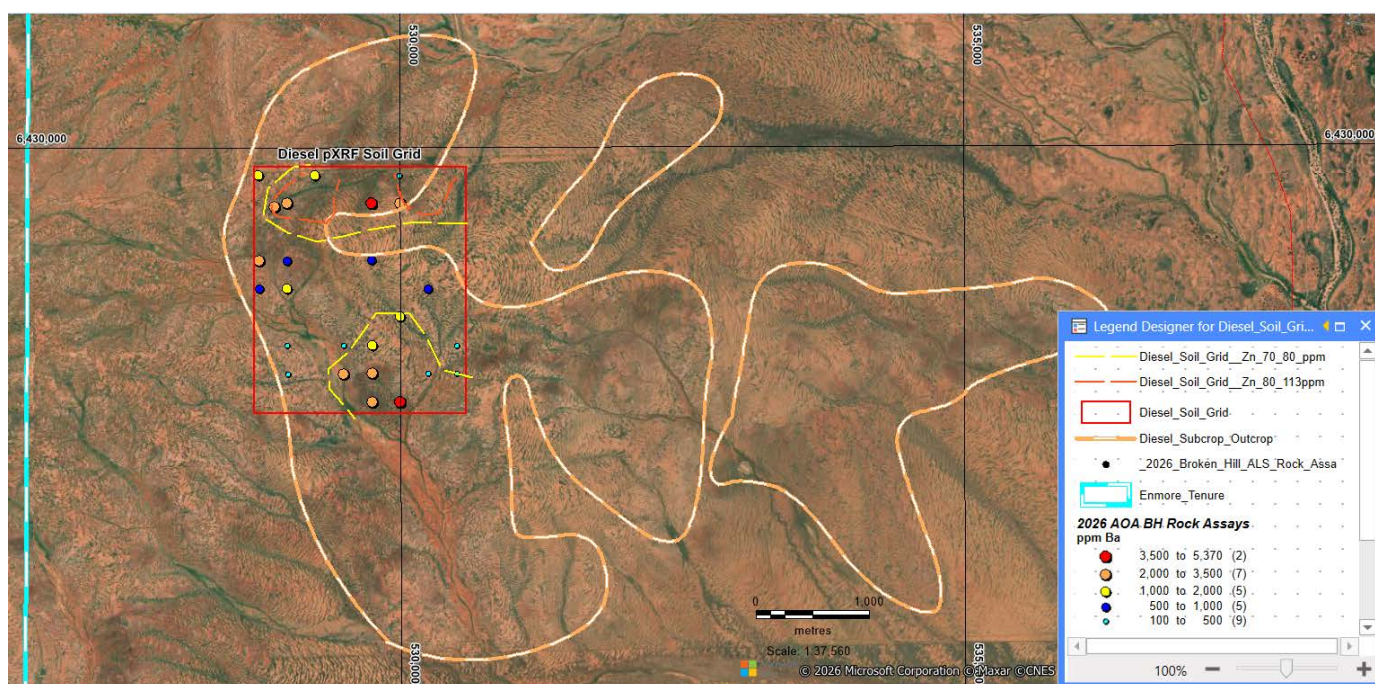


Figure 6: Diesel Prospect showing outcropping areas and Ba in rocks

Sample Number	Easting MGA94 z54H	Northing MGA94 z54H	Au	Ag	Al%	As	Ba	Be	Bi	Ca%	Cd	Co	Cr	Cu	Fe%	Ga	K%	La	Li	Mg%	Mn	Mo	Na%	Ni	P	Pb	S%	Sb	Sc	Sr	Th	Ti%	Ti	U	V	W	Zn	
26ENR060	528750	6429750	0.005	4.7	3.9	10	1290	2.6	2	0.2	0.6	11	82	130	38	20	0.1	40	10	0.12	276	1	0.1	35	2520	600	0.13	5	43	111	20	0.3	10	10	491	10	371	
26ENR061	529250	6429750	0.01	0.6	1.1	99	1210	0.5	2	0.1	0.5	7	59	162	12	10	0.2	10	10	0.05	349	3	0	14	470	45	0.05	5	3	59	20	0.1	10	10	75	10	59	
26ENR062	530000	6429750	0.006	0.5	0.1	23	280	0.5	2	0.1	0.5	4	16	41	3.8	10	0	10	10	0.03	218	6	0	6	110	19	0.04	5	1	19	20	0	10	10	21	10	15	
26ENR063	528889	6429468	0.005	0.5	4.9	5	2030	8.8	2	0.2	0.5	12	39	37	35	20	2.1	10	10	0.2	186	2	0.1	102	1820	61	0.09	5	10	113	20	0.2	10	10	79	10	933	
26ENR064	529000	6429500	0.005	0.5	0.7	22	2260	20	2	0.5	0.5	8	31	41	24	10	0.2	10	10	0.07	181	2	0	82	2570	33	0.09	5	2	140	20	0	10	10	30	10	463	
26ENR065	529000	6429000	0.005	0.5	0.7	5	520	0.5	2	0.2	0.5	2	25	20	7	10	0.2	10	10	0.04	113	1	0	8	370	9	0.03	5	3	23	20	0	10	10	22	10	50	
26ENR066	529750	6429000	0.005	0.5	2.1	5	840	0.5	2	2.1	0.5	11	129	27	6.6	10	0.1	10	10	0.97	442	2	0.3	24	280	12	0.03	5	17	85	20	0.8	10	10	371	10	33	
26ENR067	528750	6428750	0.005	0.5	1.2	173	570	7.4	2	0.1	0.5	9	11	45	23	10	0.4	10	10	0.06	173	1	0	53	2030	19	0.02	5	4	35	20	0.1	10	10	17	10	153	
26ENR068	529000	6428750	0.005	0.5	4.4	35	1100	3.5	2	0.2	0.5	11	96	103	32	10	1.2	10	10	0.15	290	4	0.2	112	2880	87	0.07	5	14	86	50	0.1	10	10	97	10	1350	
26ENR070	530000	6428500	0.005	0.5	1.7	27	1340	28	6	0.3	0.5	38	62	267	48	10	0.2	60	10	0.1	269	136	0	308	3910	310	0.09	5	92	110	20	0.1	10	10	56	10	718	
26ENR071	529500	6428250	0.005	0.5	0.6	13	200	1.4	2	0.1	0.5	17	48	87	8.5	10	0	10	10	0.01	162	42	0	38	390	32	0.03	5	5	16	20	0.1	10	10	20	38	10	205
26ENR072	529750	6428250	0.005	0.5	3.2	80	1480	6.4	3	0.2	0.5	23	137	94	42	10	0.3	10	10	0.07	288	109	0.1	151	2010	163	0.08	5	53	84	20	0.2	10	10	413	10	1095	
26ENR073	530500	6428250	0.005	0.5	0.5	5	100	0.5	2	0	0.5	2	68	2	9.6	10	0.2	110	10	0.04	123	1	0	11	220	4	<0.01	5	24	6	40	0.8	10	10	163	10	7	
26ENR074	529000	6428000	0.005	0.5	0.5	5	230	0.5	2	0	0.5	13	17	58	2.9	10	0.2	10	10	0.02	158	1	0	29	160	7	0.01	5	2	11	20	0.1	10	10	22	10	19	
26ENR075	529500	6428000	0.005	0.5	5.1	21	2310	1	4	0.2	0.5	5	162	31	17	20	0.9	80	10	0.15	180	16	0.1	14	630	48	0.08	5	12	187	40	0.4	10	10	337	10	54	
26ENR076	529750	6428000	0.005	0.5	2.1	21	2410	1.4	6	0.2	0.5	6	183	45	26	30	0.3	10	10	0.06	342	11	0.1	26	480	22	0.1	6	24	124	30	0.9	10	10	326	10	149	
26ENR077	530250	6428000	0.005	0.5	0.4	5	130	0.5	12	0	0.5	7	159	5	25	10	0.2	30	10	0.04	360	2	0	20	170	12	0.01	5	55	7	20	3.4	10	10	479	10	30	
26ENR078	530500	6428000	0.005	0.5	1.1	16	280	19	8	0.2	0.5	42	61	59	>50	10	0	10	10	0.07	234	4	0	127	5010	18	0.06	5	24	60	20	0	10	10	193	10	250	
26ENR080	529750	6427750	0.005	1.2	2.9	25	2190	0.8	2	0.1	0.5	2	185	18	14	10	0.4	10	10	0.04	163	2	0	5	340	316	0.08	5	5	93	30	0.1	10	10	318	10	43	
26ENR081	530000	6427750	0.005	0.5	1.9	8	4480	0.5	2	0.2	0.5	8	140	21	23	20	0	10	10	0.05	250	1	0	17	330	160	0.14	5	9	276	20	0.3	10	10	352	10	30	
26ENR082	529750	6429500	0.005	0.5	2.8	24	5370	0.7	3	0.3	0.5	11	205	125	28	20	0.1	10	10	0.08	403	6	0	40	480	129	0.17	5	8	320	50	0.2	10	10	933	10	36	
26ENR083	530000	6429500	0.005	0.5	1.8	27	2450	0.5	9	0.2	0.5	3	232	34	40	30	0.1	10	10	0.07	276	2	0	9	370	140	0.11	5	9	134	70	0.3	10	10	1070	10	24	
26ENR084	528750	6429000	0.005	0.5	2.4	76	2170	7.7	3	0.2	0.8	6	130	111	30	10	0.7	10	10	0.14	322	5	0.1	25	1240	151	0.08	7	12	98	20	0.2	10	10	527	10	174	
26ENR085	530250	6428750	0.005	0.5	3.1	5	660	1.8	2	0.1	0.5	6	64	28	9.1	10	1.7	60	10	0.24	380	1	0	18	870	71	0.02	5	28	33	30	0.5	10	10	290	10	36	
26ENR086	529000	6428250	0.005	0.5	0.6	35	230	1.6	2	0.1	0.5	4	15	37	8.8	10	0.2	10	10	0.04	207	1	0	15	790	26	0.01	5	2	15	20	0	10	10	22	10	121	
26ENR087	537000	6435500	0.005	0.5	0.5	5	200	0.5	3	0.1	0.7	23	47	8	31	10	0.1	10	10	0.02	121	4	0	32	390	8	0.01	5	8	15	20	0	10	10	226	30	17	
26ENR088	537250	6435500	0.005	0.5	0.2	5	60	0.5	2	0.1	0.5	14	10	14	12	10	0	10	10	0.03	170	10	0	15	480	10	0.01	5	10	14	20	0	10	10	129	10	18	
26ENR089	537000	6435250	0.005	0.5	0.2	5	130	0.5	2	0	0.5	6	11	4	13	10	0	10	10	0.01	167	<1	0	7	120	3	0.01	5	3	8	20	0	10	10	82	10	13	
26ENR090	537382	6435179	0.005	0.5	0.2	5	120	0.5	2	0	0.5	21	14	5	33	10	0.1	10	10	0.01	167	1	0	8	130	6	0.01	5	4	9	20	0	10	10	121	10	10	
26ENR091	537156	6433976	0.005	0.5	3.1	7	920	0.5	2	0.1	0.5	2	54	35	12	10	0.1	10	10	0.14	203	15	0	8	190	42	0.06	5	8	60	20	0.3	10	10	561	10	39	

Table 1 Enmore Rock Assays – Au by Au AA23 and other elements by ME ICP61 – ALS Laboratory

Sample ID	GDA94 Z54 mE	GDA94 Z54 mE	Au	Ag	Al%	As	Ba	Be	Bi	Ca%	Cd	Co	Cr	Cu	Fe%	Ga	K%	La	Li	Mg%	Mn	Mo	Na%	Ni	P	Pb	S%	Sb	Sc	Sr	Th	Ti%	Ti	U	V	W	Zn
26ENS091	529250	6429500	0.005	1	6.8	6	540	1	<2	3.3	<0.5	8	43	29	3.76	20	1.1	30	30	0.94	301	<1	0.66	21	320	48	0	<5	12	168	<20	0.4	<10	<10	95	<10	113
26ENS092	529500	6429500	<0.005	<0.5	6.2	6	340	3	<2	1.98	<0.5	9	43	25	3.71	10	1.1	40	20	0.87	373	<1	0.68	20	270	26	0	<5	12	135	<20	0.4	<10	<10	97	<10	78
26ENS093	530250	6429500	<0.005	<0.5	6.8	8	360	2	<2	1.5	<0.5	10	54	30	3.83	20	1.1	40	20	0.92	375	1	0.81	21	320	23	0	<5	12	146	20	0.4	<10	<10	109	<10	83
26ENS094	530500	6429500	0.007	<0.5	6.2	5	290	1	<2	0.47	<0.5	10	45	24	3.63	10	1.2	40	20	0.78	503	<1	0.64	19	310	33	0	<5	12	107	20	0.4	<10	<10	89	<10	71
26ENS095	528750	6429250	<0.005	<0.5	4.7	6	280	1	<2	3.34	<0.5	7	32	22	2.89	10	1	40	20	0.61	295	<1	0.43	14	370	16	0	<5	9	98	20	0.4	<10	<10	69	<10	53
26ENS096	529000	6429250	<0.005	<0.5	5.8	7	470	1	<2	3.27	<0.5	8	39	26	3.47	10	1.1	40	20	1.03	279	1	0.55	21	300	18	0	<5	11	145	20	0.4	<10	<10	92	<10	57
26ENS097	529250	6429250	<0.005	<0.5	6.1	7	430	2	<2	1.52	<0.5	10	43	25	3.8	10	1.2	60	20	0.85	457	1	0.63	20	320	22	0	<5	12	125	20	0.5	<10	<10	95	<10	75
26ENS098	529250	6429000	<0.005	<0.5	6	8	560	1	<2	0.93	<0.5	9	42	25	3.71	20	1.1	40	20	0.85	381	<1	0.58	19	300	19	0	<5	11	119	20	0.4	<10	<10	94	<10	61
26ENS099	529250	6428750	<0.005	<0.5	5.4	6	460	1	<2	0.68	<0.5	8	39	20	3.03	10	1	40	20	0.75	368	<1	0.68	17	270	21	0	<5	10	107	20	0.5	<10	<10	8		
26ENS101	529000	6428500	<0.005	<0.5	5.7	<5	280	1	6	0.43	<0.5	9	48	24	4.1	10	1.2	50	20	0.51	468	1	0.79	18	320	25	0	<5	11	91	<20	0.5	<10	<10	96	<10	58
26ENS102	529250	6428500	<0.005	<0.5	7.4	6	310	2	10	0.96	<0.5	10	53	30	4.51	20	1.3	50	20	0.95	398	<1	0.88	25	380	19	0	<5	15	154	20	0.5	<10	<10	105	<10	64
26ENS103	530000	6428250	<0.005	<0.5	6.4	5	330	2	3	1.78	<0.5	10	46	26	4.07	10	1.2	50	20	0.9	418	1	0.84	22	340	21	0	<5	14	162	<20	0.5	<10	<10	99	<10	68
26ENS104	530500	6428250	<0.005	<0.5	7.3	5	360	1	5	1.17	<0.5	10	55	22	4.19	20	1.2	60	20	0.81	421	1	0.75	23	360	19	0	<5	13	137	<20	0.4	<10	<10	90	<10	62
26ENS105	530000	6428000	<0.005	<0.5	6.7	<5	310	2	7	0.91	<0.5	10	49	30	3.97	20	1.3	40	20	0.82	433	1	0.85	23	340	19	0	<5	13	142	<20	0.4	<10	<10	94	<10	73
26ENS106	529750	6427750	<0.005	<0.5	7	<5	450	1	5	0.56	<0.5	10	44	29	4.1	20	1.5	50	20	0.73	459	1	0.84	21	300	35	0	<5	12	118	20	0.4	<10	<10	91	<10	78
26ENS107	530250	6427750	0.006	<0.5	6.7	<5	280	1	5	1.16	<0.5	10	49	28	3.83	10	1.1	60	20	0.85	448	1	1.05	23	370	21	0	<5	12	145	20	0.4	<10	<10	88	<10	68
26ENS108	530500	6427750	<0.005	<0.5	6.6	<5	330	2	7	0.66	<0.5	18	54	39	4.4	10	1.5	60	20	0.81	667	1	0.95	31	410	22	0	<5	14	109	<20	0.5	<10	<10	100	<10	75
26ENS109	528750	6428500	<0.005	<0.5	7.7	6	320	2	7	1.44	<0.5	10	50	36	4.53	20	1.3	50	20	0.99	419	1	0.93	27	330	24	0	<5	16	161	<20	0.5	<10	<10	109	<10	81
26ENS111	528700	6428000	<0.005	0.9	7.8	6	470	2	4	1.76	<0.5	10	51	31	4.38	20	1.3	50	20	1.17	408	2	0.94	24	340	125	0	<5	14	188	20	0.4	<10	<10	103	<10	97
26ENS112	529500	6428000	<0.005	<0.5	6.4	5	320	2	5	0.88	<0.5	11	45	29	3.92	10	1.2	50	20	0.9	443	2	0.88	22	330	36	0	<5	13	131	20	0.4	<10	<10	92	<10	75
26ENS113	529750	6428000	<0.005	<0.5	6.8	6	350	2	8	1.88	<0.5	13	39	49	4.01	10	1.2	50	20	1.15	371	1	0.89	26	360	23	0	<5	18	187	<20	0.4	<10	<10	104	<10	78
26ENS114	537156	6433976	<0.005	<0.5	6	5	450	1	5	0.64	<0.5	8	42	24	3.67	10	1	50	20	0.69	394	1	0.75	17	280	48	0	<5	11	119	20	0.4	<10	<10	90	<10	68
26ENS115	538000	6434000	<0.005	<0.5	5.9	5	410	1	4	2.75	<0.5	8	41	28	3.64	10	1	60	20	0.65	363	1	0.6	19	400	23	0	<5	11	97	20	0.4	<10	<10	88	<10	54
26ENS116	538250	6434000	<0.005	<0.5	6.9	<5	550	2	7	1.04	<0.5	9	47	23	4.14	20	1.3	50	20	0.78	405	1	0.76	21	340	21	0	<5	13	123	20	0.4	<10	<10	87	<10	81



26ENRC072 1,095ppm Zn, 1,480ppm Ba and 163ppm Pb



26ENRO060 4.7g/t Ag, 600ppm Pb, 1,290ppm Ba and 312ppm Zn



26ENRC082 5,370ppm Ba, 125ppm Cu, 403ppm Mn and 129ppm Pb



Diesel Prospect with outcrop in the foreground

Competent Person Statement

The information in the report above that relates to Exploration Results, Exploration Targets and Mineral Resources is based on information compiled by Mr Mark Derriman, who is the Company's Chief Technical Officer and a member of The Australian Institute of Geoscientists (1566). Mr Mark Derriman has sufficient experience that is relevant to the style of mineralization and type of deposit under consideration and to the activities which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Exploration Targets, Mineral Resources and Ore Reserves. Mr Mark Derriman consents to the inclusion in this report of matters based on his information in the form and context in which it appears.

Forward-Looking Statement

This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning planned exploration program and other statements that are not historical facts. When used in this document, the words such as "could", "plan", "estimate", "expect", "intend", "may", "potential", "should" and similar expressions are forward-looking statements. Although Ausmon Resources Limited believes that its expectations reflected in these forward-looking statements are reasonable, such statements involve risks and uncertainties and no assurance can be given that actual results will be consistent with these forward-looking statements.

Authorised by :

Eric Sam Yue

Executive Director/Secretary

T : 02 9264 6288

E : office@ausmonresources.com.au

JORC Code, 2012 Edition – Table 1 Enmore (EL 9220) Soil and Rock Results Received

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- The sampling was completed on the 12th August 2026 - A hand-held Garmin GPS unit was used to record the soil and rock locations as GDA 94 Zone 54 - OREAS standards 353b and 38 were inserted into the sample sequence every 15th sample and 1 blank standard was included. - The soil and rock samples were submitted to ALS in Adelaide for Au (AU AA23) and all other elements ME ICP61
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	There was no drilling
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	There was no drilling
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical	There was no drilling

Criteria	JORC Code explanation	Commentary																																										
	studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.																																											
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- All of the rock samples were collected and placed in prenumbered calico bags and all soil samples were collected and placed in ore numbered geochem paper bags. - The samples were scanned initially with the Olympus Delta pXRF(data not included in this report) with samples selected sent to ALS in Adelaide. The rock and soil assay results are included in this announcement - This is appropriate for the early level of exploration and appropriate for the material being sampled.																																										
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	All samples were placed into pre numbered polywoven bags Every sample was submitted for the following elements <table><tr><td>Au</td><td>Ag</td></tr><tr><td>Al%</td><td>As</td><td>Ba</td><td>Be</td><td>Bi</td><td>Ca%</td><td>Cd</td><td>Co</td></tr><tr><td>Cr</td><td>Cu</td><td>Fe%</td><td>Ga</td><td>K%</td><td>La</td><td>Li</td><td>Mg%</td></tr><tr><td>Mn</td><td>Mo</td><td>Na%</td><td>Ni</td><td>P</td><td>Pb</td><td>S%</td><td>Sb</td></tr><tr><td>Sc</td><td>Sr</td><td>Th</td><td>Ti%</td><td>Tl</td><td>U</td><td>V</td><td>W</td></tr><tr><td>Zn</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Au	Ag	Al%	As	Ba	Be	Bi	Ca%	Cd	Co	Cr	Cu	Fe%	Ga	K%	La	Li	Mg%	Mn	Mo	Na%	Ni	P	Pb	S%	Sb	Sc	Sr	Th	Ti%	Tl	U	V	W	Zn							
Au	Ag																																											
Al%	As	Ba	Be	Bi	Ca%	Cd	Co																																					
Cr	Cu	Fe%	Ga	K%	La	Li	Mg%																																					
Mn	Mo	Na%	Ni	P	Pb	S%	Sb																																					
Sc	Sr	Th	Ti%	Tl	U	V	W																																					
Zn																																												
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- Sample sites were chosen by the Speccy Science Principal Geologist and verified by the site geologist. - All primary data, data entry procedures, data verification and electronic data storage is per Ausmon procedures. - The drill collar was based on hand-held GPS sample locations.																																										
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- The sample locations were initially surveyed using a hand-held GPS accurate to 3 meters. - The grid system used in GDA94 Zone 54. There is little height variation across the area of drilling																																										

Criteria	JORC Code explanation	Commentary
<i>Data spacing and distribution</i>	• <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i>	• Sample spacing was on a 250m x250m grid and is appropriate for this stage of exploration. • Sample spacing was designed to allow appropriate anomaly definition for this early stage of exploration.
<i>Orientation of data in relation to geological structure</i>	• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	• The sample orientation was aimed to be close to 90 degrees of the generally NE SW structures.
<i>Sample security</i>	• <i>The measures taken to ensure sample security.</i>	• All samples were secured by field geologist and delivered to the laboratory after the sampling program was completed by the Speccy Science Senior Geologist
<i>Audits or reviews</i>	• <i>The results of any audits or reviews of sampling techniques and data.</i>	• The sampling technique was reviewed onsite by Speccy Science and the site geologist.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	• <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	• Drilling completed in EL 9220 (Enmore), in New South Wales, Australia • The tenement is owned by New Base Metals, a subsidiary of Ausmon Resources Limited. • The tenement is located in New South Wales approximately 50km south of Broken Hill. • There are no JVs and Royalties • There are no Native Title claimants • The tenement is located in the Broken Hill Mining District
<i>Exploration done by other parties</i>	• <i>Acknowledgment and appraisal of exploration by other parties.</i>	• CRA completed a ground magnetic survey in the NW of the tenement at the Ruins Prospect and followed up with RAB drilling. • Aberfoyle completed a GEOTEM survey over the western portion of the license with limited drill follow up.

Criteria	JORC Code explanation	Commentary
		- Anglo American collected rock samples across the tenement and followed up with 36 auger holes and two diamond holes. - Perilya carried out Niton pXRF soil sampling in the SE of the tenement in addition to VTEM survey and a small RC drilling program. Two VTEM conductors were delineated, and core drilled with no significant mineralisation intersected
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	Broken Hill style metasediment base metal mineralisation
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	There was no drilling
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Not Applicable
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	- The mineralisation is located in the Curnamona Block that extends from NSW into South Australia and the target steeply dipping base metal mineralisation hosted by Proterozoic metasediments or near flat lying Loxton/Perilla sands. - the sampling is appropriate for this level of exploration
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of</i>	A table showing the assay results in relation to EL 9220, is included in

Criteria	JORC Code explanation	Commentary
	<i>intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	the announcement.
<i>Balanced reporting</i>	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All exploration results for the multi elements are included in a table in the announcement
<i>Other substantive exploration data</i>	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	There is no other relevant information to add
<i>Further work</i>	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	The next stage of exploration will be further surficial geochemical exploration of the Enmore tenement.