



High-Grade Gold-Tungsten Mineralisation Extended at Firetower

Highlights

- **High-grade gold and tungsten mineralisation intersected** in latest drilling at the 100%-owned **Firetower Project** in northern Tasmania, confirming significant depth and strike extensions.

Assays from hole 2019FTD003E include:

- **12.95m @ 2.24g/t Au, 0.46% WO₃, 0.18% Cu, 0.23% Co, 7.22g/t Ag** from 156.9m, including
 - **1.20m @ 3.95g/t Au, 0.93% WO₃, 0.20% Cu, 0.24% Co, 9.60g/t Ag** from 157.30m; and
 - **2.58m @ 4.56g/t Au, 0.92% WO₃, 0.22% Cu, 0.32% Co, 8.31g/t Ag** from 167.27m.
- **0.73m @ 11.95g/t Au, 2.29% WO₃, 0.46% Cu, 0.64% Co and 20.3g/t Ag** from 167.27m, associated with semi-massive sulphide mineralisation.
- Revised Firetower **geological model interprets two structural trends** hosting broad zones of gold and polymetallic mineralisation, providing an improved targeting framework.
- **Emerging NW-plunging high-grade shoots now apparent** and remain open at depth and along strike.
- Metallurgical testwork is the next step ahead of maiden **Mineral Resource Estimate**.
- For further information or to post questions, go to the Flynn Gold Investor Hub at <https://flynngold.com.au/link/PQmLDP>

Flynn Gold Limited (ASX: FG1) ("Flynn" or "the Company") is pleased to report further high-grade gold and tungsten with accessory copper, cobalt and silver assay results from its 2026 drilling program at the 100%-owned Firetower Project in northern Tasmania (Figure 4).

Managing Director and CEO Neil Marston commented:

"The final results from our recent drilling program represent another important step forward for Firetower, delivering an outstanding intersection of almost 13 metres of high-grade gold and tungsten mineralisation in extensional drill hole 2019FTD003E."



JOIN FLYNN GOLD'S INTERACTIVE INVESTOR HUB to interact with Flynn's announcements and updates by asking questions or making comments which our team will respond to where possible

ASX: FG1

ABN 82 644 122 216

CAPITAL STRUCTURE

Share Price: **A\$0.014**

Cash (30/06/26): **A\$1.12M**

Debt: **Nil**

Ordinary Shares: **608.6M**

Market Cap: **A\$8.5M**

Options

Listed (FG1O): **50.6M**

Listed (FG1OA): **118.7M**

Unlisted Options: **65.5M**

BOARD OF DIRECTORS

Clive Duncan

Non-Executive Chair

Neil Marston

Managing Director and CEO

Sam Garrett

Technical Director

John Forwood

Non-Executive Director

COMPANY SECRETARY

Mathew Watkins

CONTACT

Suite 2, Level 11
385 Bourke Street
Melbourne VIC 3000

info@flynngold.com.au
www.flynngold.com.au

“This drill hole was designed to test for depth and north-westerly strike extensions to the geological model. We are delighted to have successfully confirmed the continuity of this highly mineralised zone, which remains open along strike and at depth.

“These latest assay results continue to build our confidence in Firetower, confirming the presence of multiple zones of polymetallic mineralisation and reinforcing our existing geological model.

“With these final assays now received, we can commence the planned program of metallurgical sighter tests required to finalise our maiden Mineral Resource Estimate for Firetower.

“With the current rights issue closing on Wednesday this week, eligible shareholders who have not yet accepted their entitlement are encouraged to take up their rights as we advance exploration work at both the Firetower and Golden Ridge Projects. The Company is at an important inflection point with significant news flow expected across both projects in the coming weeks.”

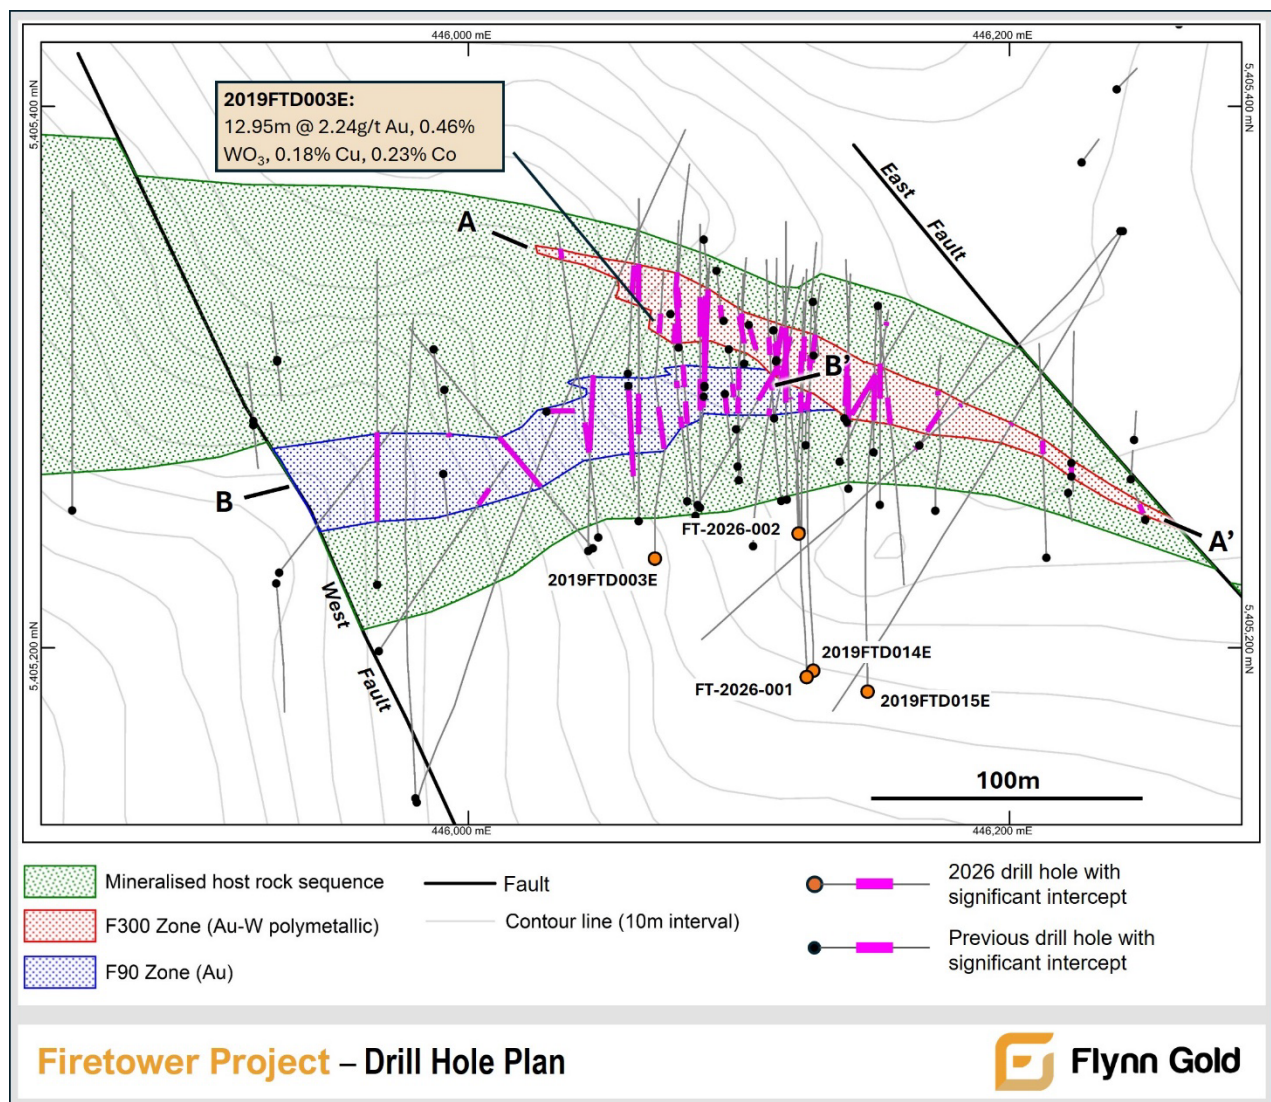


Figure 1 – Firetower Drill Hole Plan

2026 Drilling Update

Assay results have been received for the priority mineralised zones in drill holes FT-2026-002 and 2019FTD003E, drilled as part of Flynn's 2026 campaign at the Firetower Project. The five-hole program targeted extensions of the high-grade polymetallic gold-tungsten mineral system and collected drill core for metallurgical testwork to support Mineral Resource studies.

Hole 2019FTD003E ("E" denoting Extension), drilled as an extension to historical hole 2019FTD003 (original depth of 120.20m), successfully intersected a zone of broad polymetallic mineralisation, returning a significant mineralised intercept of:

2019FTD003E:

- **12.95m @ 2.24g/t Au, 0.46% WO₃, 0.18% Cu, 0.23% Co, 7.22g/t Ag** from 156.90m, including:
 - **1.20m @ 3.95g/t Au, 0.93% WO₃, 0.20% Cu, 0.24% Co, 9.60g/t Ag** from 157.30m; and
 - **2.58m @ 4.56g/t Au, 0.92% WO₃, 0.22% Cu, 0.32% Co, 8.31g/t Ag** from 167.27m.

The 2019FTD003E intercept occurs approximately 50m northwest of hole 2019FTD014E (**9.64m @ 2.49g/t Au, 0.29% WO₃, 0.52% Cu, 0.04% Co and 9.9g/t Ag** from 200.13m), drilled earlier in the 2026 campaign. These results support the continuity of significant polymetallic mineralisation and demonstrate the potential for further extensions both at depth and along strike.

Hole FT-2026-002 intersected two broad zones of predominantly lower-grade gold and polymetallic mineralisation, returning best intercepts of:

FT-2026-002:

- **16.40m @ 0.65g/t Au, 0.07% WO₃, 0.04% Cu, 0.04% Co, 2.46g/t Ag** from 99.75m
- **23.8m @ 0.40g/t Au, 0.05% WO₃, 0.09% Cu, 0.09% Co, 2.87g/t Ag** from 124.7m, including:
 - **5.4m @ 0.8g/t Au, 0.12% WO₃, 0.01% Cu, 0.19% Co, 2.75g/t Ag** from 124.7m, including
 - **0.6m @ 3.81g/t Au, 0.15% WO₃, 0.02% Cu, 0.07% Co, 3.42g/t Ag** from 129.50m; and

Drill hole information and new significant intercepts (this announcement) are shown in Tables 1 and 3.

Updated Geological Model

Ongoing geological interpretation, incorporating recent drilling results and a review of historical data, has identified two principal mineralised structural trends at Firetower (Figure 1):

- **F300 Zone:** A northwest-trending corridor characterised by broad zones of polymetallic gold-tungsten-copper-cobalt mineralisation, including discrete high-grade intervals.
- **F90 Zone:** An approximately east-west trending corridor characterised by broad zones of predominantly gold mineralisation, generally with lower tungsten and base metal grades, but containing localised higher-grade gold and polymetallic intervals.

The latest drilling results have further strengthened the geological interpretation of the F300 Zone, confirming the extension of significant polymetallic mineralisation below and north-west of previous drilling. In particular, the intercept in 2019FTD003E, approximately 50m north-west of 2019FTD014E, supports the interpretation of a possible northwest-plunging zone of higher-grade mineralisation within the broader F300 structural corridor (Figure 2).

Importantly, the F300 Zone remains open to the north-west and at depth, highlighting the potential to extend the currently defined mineralised footprint.

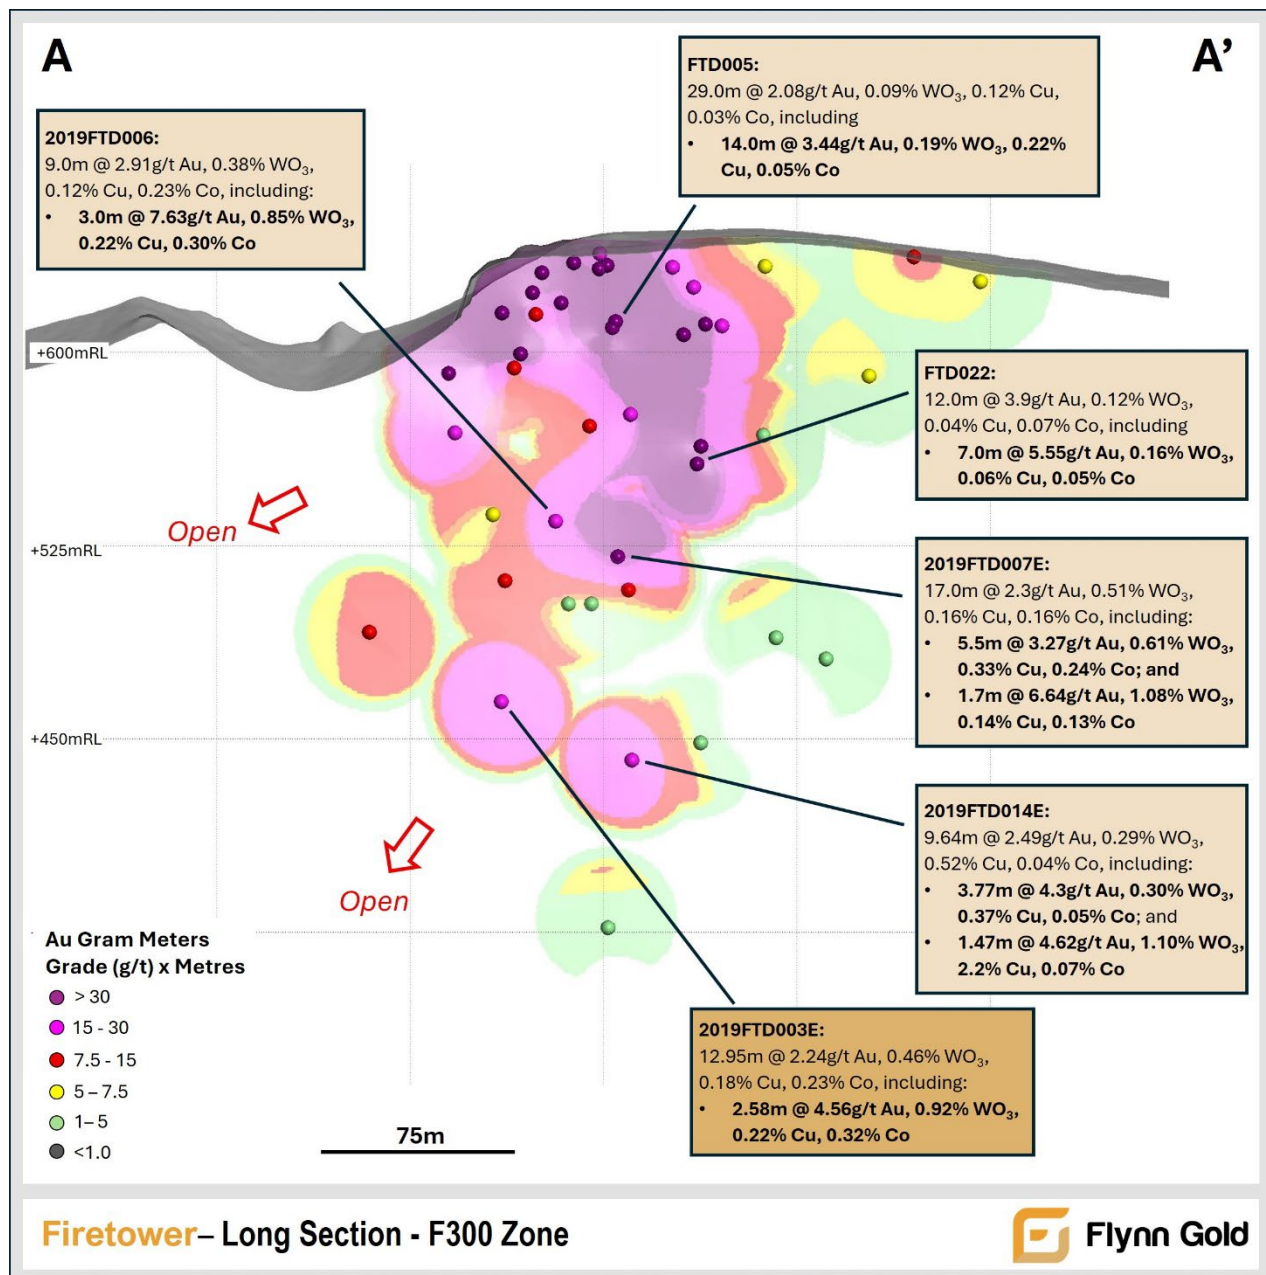


Figure 2 – Long Section A-A': Firetower F300 Zone

The F90 Zone appears to terminate against the F300 structural corridor (Figure 3). Historical drilling indicates broad zones of predominantly gold mineralisation containing locally developed, narrower polymetallic intervals, typically 1-3m down-hole. However, wider and higher-grade polymetallic mineralisation occurs near the F300 Zone, where the two mineralised trends appear to converge. This suggests that structural interaction may have influenced the distribution and intensity of polymetallic mineralisation.

The revised geological interpretation provides an improved understanding of the distribution of higher-grade mineralisation and will help guide future exploration and drill targeting.

Current and previous drill hole information significant intercept and Au gram-meter information relating to the F300 and F90 zones and the respective long sections in Figures 2 and 3 are

Drill hole information and significant intercepts (current and previous drilling) pertaining to gold gram-meter information shown in long sections for the F300 and F90 zone (Figures 2 and 3) are contained in Tables 1-5.

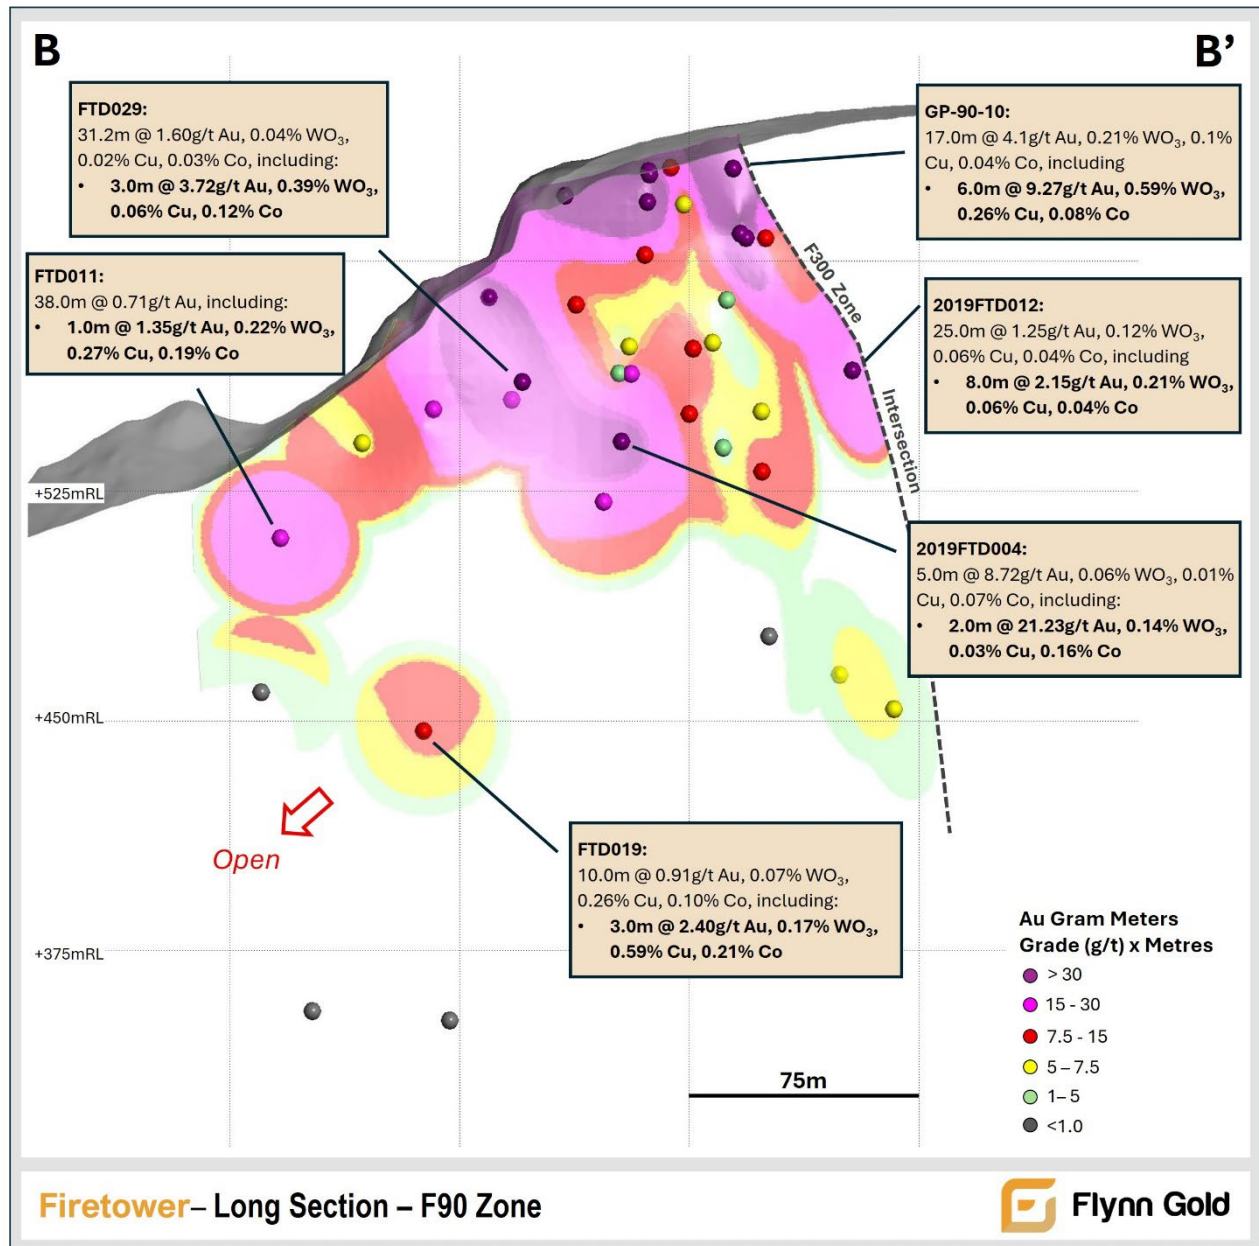


Figure 3 - Long Section B-B': Firetower F90 Zone

Next Steps

Planned activities for the remainder of 2026 at the Firetower Project are:

1. Review of historical geophysical surveys across the entire project area, which is well underway;
2. Metallurgical sighter testwork; and
3. Geological modelling leading to the estimation of a maiden Mineral Resource Estimate.

The Company's resource definition drilling program at the Brilliant prospect within the Golden Ridge Project in NE Tasmania is ongoing, with assay results pending.

Firetower Prospect Overview

Firetower is an advanced-stage polymetallic gold-tungsten project located within the north-eastern extension of the Mt Read Volcanic Sequence, one of Australia's premier volcanic-hosted mineral provinces (Figure 4). Drilling completed by Flynn and previous explorers has now demonstrated continuity of polymetallic mineralisation over a strike length of approximately 250m, and up to 200m vertical depth from surface, with the system remaining open along strike and at depth.

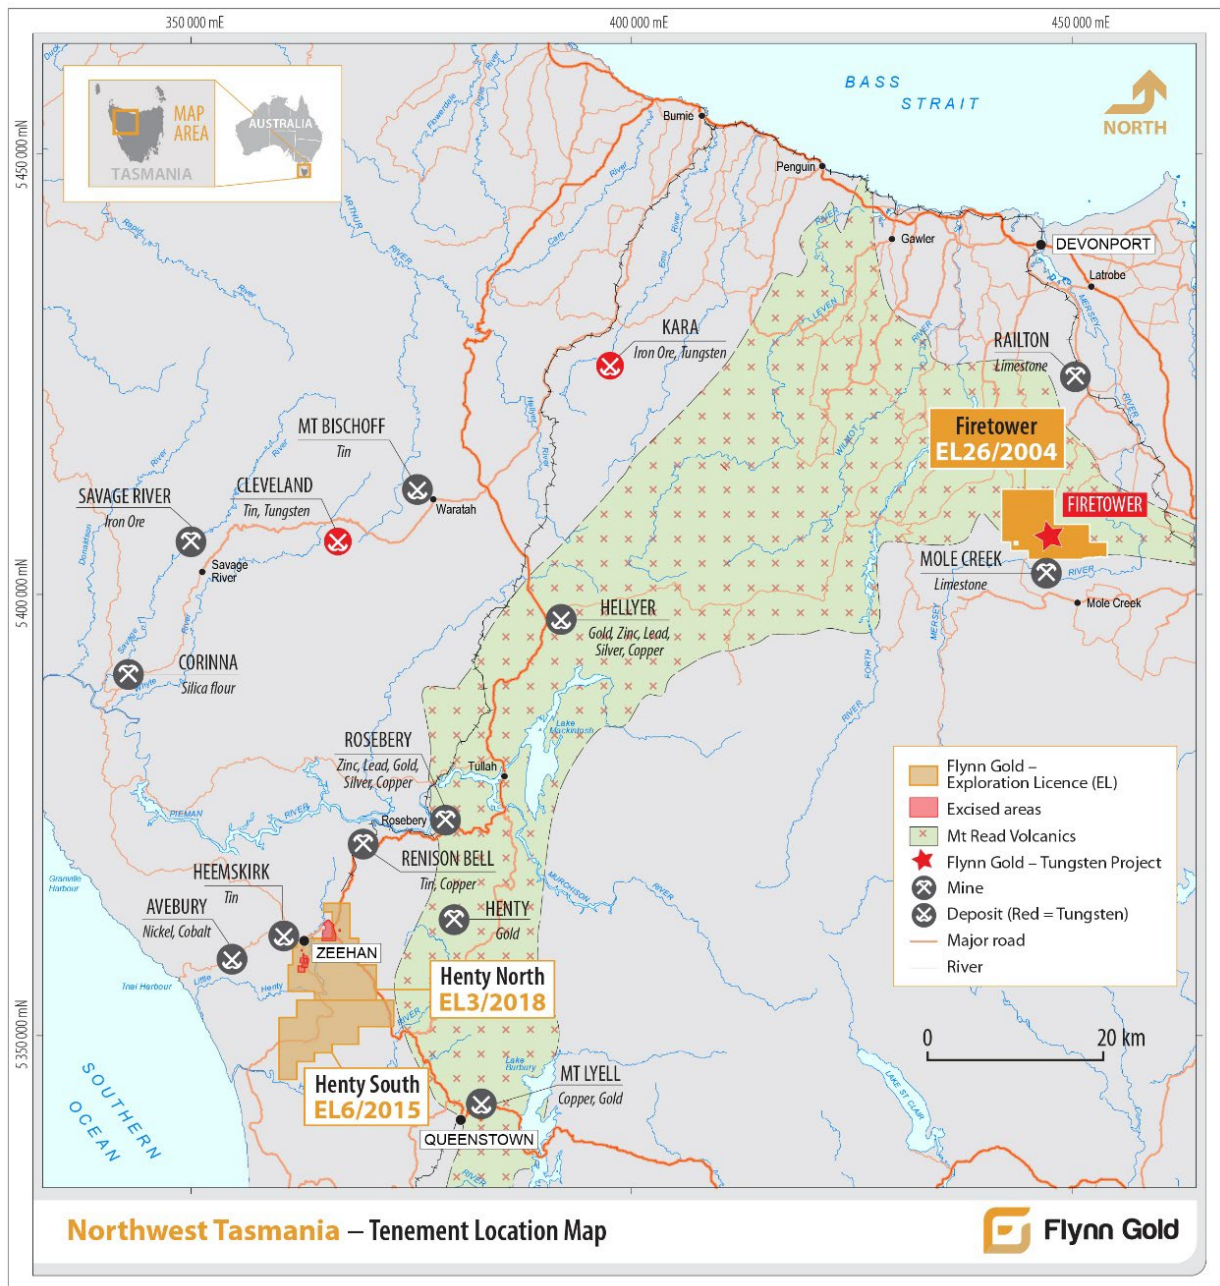


Figure 4 – Location of Flynn Gold's NW Tasmanian Projects

Results reported to date indicate a consistent style of mineralisation comprising broad polymetallic mineralised envelopes containing discrete zones of exceptionally high-grade gold-tungsten mineralisation. The repeatability of this mineralisation style across multiple drill holes is providing increasing confidence in Flynn's developing geological model and supports the potential for further expansion of the mineral system through ongoing drilling.

Since acquiring the project, Flynn has completed extensive geological re-logging, re-assaying and reinterpretation of historical drilling, providing the basis for the current drilling campaign and significantly improving the Company's understanding of the Firetower mineral system.

Historical drilling demonstrates the same consistent mineralisation style observed in hole 2019FTD003E, comprising broad polymetallic mineralised intervals containing discrete zones of high-grade gold mineralisation accompanied by significant tungsten, copper, and cobalt values.

Best intercepts from Flynn's work and historical re-assays since 2023 include:

GP-90-10¹:

- **3.0m @ 17.20g/t Au, 1.10% WO₃, 0.47% Cu, 0.02% Co** from 10.0m;
 - within **6.0m @ 9.27g/t Au, 0.59% WO₃, 0.26% Cu, 0.08% Co** from 7.0m;
 - within 17.0m @ 4.06g/t Au, 0.21% WO₃, 0.10% Cu, 0.04% Co, from 7.0m.

2019FTD007E^{1, 2}:

- **1.7m @ 6.64g/t Au, 1.08% WO₃, 0.14% Cu, 0.13% Co**, from 121.0m; and
- **5.5m @ 3.27g/t Au, 0.61% WO₃, 0.33% Cu, 0.24% Co** from 132.5m; and
- **3.8m @ 2.18g/t Au, 0.88% WO₃, 0.10% Cu, 0.27% Co** from 126.2m;
 - within 17.0m @ 2.31g/t Au, 0.51% WO₃, 0.16% Cu, 0.16% Co from 121.0m.

2019FTD006³:

- **3.0m @ 8.59g/t Au, 0.83% WO₃, 0.21% Cu, 0.29% Co** from 105m;
 - within 9.0m @ 2.56g/t Au, 0.32% WO₃, 0.1% Cu, 0.25% Co, from 99.0m.

Approved by the Board of Flynn Gold Limited.

For more information contact:

Neil Marston
Managing Director & CEO
+61 3 9692 7222
info@flynnngold.com.au

Nicholas Read
Media & Investor Relations
+61 (0) 419 929 046
nicholas@readcorporate.com.au

¹ See FG1 ASX Announcement dated 30 October 2025 for full details.

² See FG1 ASX Announcement dated 15 July 2026 for full details.

³ See FG1 ASX Announcement dated 27 October 2023 for full details.

APPENDIX 1

Table 1: Drill Hole Collar Details, Firetower Prospect (this announcement)

Hole ID	Easting	Northing	RL	Dip	Azimuth	Total Depth (m)	Drilled metres
2019FTD03E	446069	5405235	600	-60	360	197.75	77.75 (120.20 – 197.75)
FT-2026-002	446122	5405243	628	-65	360	185.8	185.8

Table 2: Drill Hole Collar Details, Firetower Prospect (previous and current drilling)

Hole ID	Easting	Northing	RL	Dip	Azimuth	Total Depth (m)	Hole Type
2019FTD001	446078	5405311	636	-60	360	90	DD
2019FTD002	446173	5405251	639	-60	360	109.2	DD
2019FTD003/E	446069	5405235	600	-60	360	197.75	DD
2019FTD004/E	446081	5405254	611	-60	360	227.15	DD
2019FTD005/E	446105	5405238	620	-60	360	197.4	DD
2019FTD006	446100	5405267	623	-60	360	134	DD
2019FTD007/E	446123	5405243	628	-60	360	181.8	DD
2019FTD008	446102	5405305	639	-60	360	50.8	DD
2019FTD010	446128	5405308	644	-60	360	52	DD
2019FTD011	446125	5405275	635	-60	360	86.2	DD
2019FTD012	446152	5405253	640	-60	360	142.7	DD
2019FTD013	446150	5405272	640	-60	360	104.4	DD
2019FTD014/E	446127	5405192	611	-60	360	278.15	DD
2019FTD015/E	446148	5405185	610	-60	360	251.5	DD
FT-2023-001	446100	5405262	634	-70	360	214.85	DD
FT-2026-001	446125	5405190	610	-65	360	311.6	DD
FT-2026-002	446122	5405243	628	-65	360	185.8	DD
FAT046	446104	5405319	643	-60	164	21.1	PC
FAT049	446250	5405247	635	-60	339	21.1	PC
FTD001	446151	5405326	650	-44.7	174	145	DD
FTD002	446116	5405254	627	-45	354	122.6	DD
FTD003	446084	5405249	611	-45	354	121.5	DD
FTD004	446048	5405241	591	-45	354	153	DD
FTD005	446118	5405255	628	-20	360	108.1	DD
FTD006	446140	5405259	637	-45	360	117	DD
FTD007	446086	5405252	613	-15	360	107.5	DD
FTD008	446063	5405247	601	-20	360	126.6	DD
FTD009	446214	5405233	631	-45	358	111.7	DD
FTD010	446407	5405219	622	-35	179.5	115	DD
FTD011	445966	5405223	538	-30	360	138.7	DD
FTD012	445854	5405251	500	-20	360	126	DD
FTD013	446113	5405285	634	-50	10	80.5	DD

Hole ID	Easting	Northing	RL	Dip	Azimuth	Total Depth (m)	Hole Type
FTD014	446114	5405306	641	-50	10	55.5	DD
FTD015	446114	5405306	641	-30	10	36.5	DD
FTD016	446140	5405283	640	-50	31	73.5	DD
FTD017	446139	5405285	640	-30	3	60.8	DD
FTD018	446223	5405263	640	-40	1	70.5	DD
FTD019	445967	5405199	535	-50	34	124.1	DD
FTD020	445930	5405228	515	-50	38	106	DD
FTD021	445929	5405224	515	-50	175	71.6	DD
FTD022	446137	5405269	637	-70	20	100.3	DD
FTD023	446087	5405293	632	-70	184	46.2	DD
FTD024	446087	5405297	634	-30	2	52.4	DD
FTD025	446087	5405296	634	-50	360	61.3	DD
FTD026	446059	5405301	631	-50	3	83.3	DD
FTD027	446059	5405297	630	-50	177	60.1	DD
FTD028	446046	5405237	589	-40	319	136	DD
FTD029	446044	5405236	588	-30	360	74.2	DD
FTD030	446085	5405253	612	-40	30	92.5	DD
FTD031	446167	5405275	643	-50	30	72.7	DD
FTD038	442686	5406991	418	-73.6	172	512.4	DD
FTD039	445981	5405143	542	-61	17	472	DD
FTD040	445981	5405145	541	-62	358	339.5	DD
FTD041	446241	5405354	647	-61	223	409.1	DD
FTD042	446242	5405354	647	-65.03	207.83	425.8	DD
GP-90-01	446094	5405321	641	-90	360	24.7	DD
GP-90-02	446075	5405323	636	-90	360	25.8	DD
GP-90-03	446029	5405287	599	-65	89	24.6	DD
GP-90-04	446087	5405351	629	-55	174	27.2	DD
GP-90-05	446092	5405339	632	-50	174	30.3	DD
GP-90-06	446096	5405310	639	-52	174	30.45	DD
GP-90-07	446095	5405294	634	-51	174	30.95	DD
GP-90-08	446099	5405281	628	-55	174	30.15	DD
GP-90-09	446127	5405328	647	-49	174	30.45	DD
GP-90-10	446113	5405317	644	-45	174	30.25	DD
GP-90-11	445929	5405306	562	-44	354	30.45	DD
GP-90-12	445929	5405306	563	-60	174	30.3	DD
GP-90-13	445921	5405284	543	-45	354	30.6	DD
GP-90-14	445921	5405282	542	-60	174	32.3	DD
GP-90-15	445987	5405310	565	-55	174	30.85	DD
GP-90-16	445991	5405295	565	-55	174	30.75	DD
GP-90-17	445991	5405264	560	-55	174	30.35	DD

Notes (Tables 1-2): Geographic datum is MGA94 Zone 55.

Table 3: 2026 Firetower F300 Zone Drilling Significant Intercepts (this announcement)

Hole ID	From m	To m	Interval m	Au g/t	Au gram-metres	WO ₃ %	Cu %	Co %	Ag g/t
2019FTD003E	156.90	169.85	12.95	2.24	29.01	0.46	0.18	0.23	7.22
<i>including</i>	157.30	158.50	1.20	3.95	4.74	0.93	0.20	0.24	9.6
<i>and</i>	159.90	169.85	9.95	2.38	23.63	0.48	0.19	0.25	7.52
<i>including</i>	167.27	169.85	2.58	4.56	11.76	0.92	0.22	0.32	8.31
<i>including</i>	167.27	168.00	0.73	11.95	8.72	2.29	0.46	0.64	20.3
FT-2026-002	99.75	116.15	16.40	0.65	10.64	0.07	0.04	0.04	2.46
FT-2026-002	124.70	148.50	23.80	0.40	9.52	0.05	0.09	0.09	2.87
<i>including</i>	124.70	130.10	5.40	0.80	4.32	0.12	0.01	0.19	2.75
<i>including</i>	129.50	130.10	0.60	3.81	2.29	0.15	0.02	0.07	3.42

Notes (Table 3): Reported grades are calculated as down-hole length weighted averages. Intercept interval lengths are downhole lengths – true width not known. Au gram-metres = (Au g/t) x (Interval m).

Table 4: Firetower F300 Zone Drilling Significant Intercepts (Previous and Current Drilling)

Hole ID	From (m)	To (m)	Interval (m)	Au g/t	Au gram-metres	WO ₃ %	Cu %	Co %	Ag g/t
2019FTD001	2.00	54.50	52.50	1.40	73.74	0.05	0.06	0.03	4.65
<i>including</i>	33.00	38.00	5.00	2.87	14.37	0.14	0.09	0.01	6.36
<i>and</i>	43.50	50.00	6.50	4.42	28.72	0.1	0.21	0.02	11.84
<i>and</i>	53.00	54.50	1.50	2.66	3.99	0.25	0.06	0.02	5.24
2019FTD002	82.00	85.00	3.00	1.39	4.17	0.05	0.08	0.10	1.82
2019FTD003E	156.90	169.85	12.95	2.24	29.01	0.46	0.19	0.23	7.22
<i>including</i>	157.30	158.50	1.20	3.95	4.74	0.93	0.2	0.24	9.60
<i>and</i>	159.90	169.85	9.95	2.38	23.63	0.48	0.19	0.25	7.52
<i>including</i>	167.27	169.85	2.58	4.56	11.76	0.92	0.22	0.32	8.31
2019FTD004E	111.90	125.10	13.20	0.72	9.50	0.08	0.13	0.08	3.44
2019FTD005E	136.70	143.40	6.70	0.48	3.20	0.13	0.03	0.07	1.47
2019FTD006	99.00	108.00	9.00	2.91	26.15	0.38	0.12	0.22	7.77
<i>including</i>	105.00	108.00	3.00	7.63	22.89	0.85	0.22	0.30	11.61
2019FTD007E	121.00	138.00	17.00	2.31	39.27	0.51	0.16	0.16	8.17
<i>including</i>	121.00	122.70	1.70	6.64	11.29	1.08	0.14	0.13	30.23
<i>and</i>	126.20	130.00	3.80	2.18	8.29	0.88	0.1	0.27	7.33
<i>and</i>	132.50	138.00	5.50	3.27	18.00	0.61	0.33	0.24	7.07
2019FTD008	14.50	35.00	20.50	1.55	31.71	0.03	0.06	0.02	3.76
<i>including</i>	16.50	21.00	4.50	1.50	6.75	0.01	0.02	0.01	3.60
<i>and</i>	24.00	28.00	4.00	4.35	17.39	0.08	0.13	0.03	7.86
<i>and</i>	33.00	34.00	1.00	3.49	3.49	0.07	0.15	0.04	8.83
2019FTD011	59.00	79.00	20.00	1.49	29.72	0.1	0.1	0.08	4.44

Hole ID	From (m)	To (m)	Interval (m)	Au g/t	Au gram-metres	WO ₃ %	Cu %	Co %	Ag g/t
<i>including</i>	64.00	73.00	9.00	2.89	26.01	0.21	0.08	0.11	7.33
2019FTD013	23.00	49.00	26.00	1.49	38.75	0.06	0.06	0.07	2.46
<i>including</i>	29.00	32.00	3.00	1.59	4.78	0.01	0.05	0.21	4.26
<i>and</i>	34.00	37.00	3.00	2.84	8.52	0.07	0.06	0.06	2.70
<i>and</i>	42.00	45.00	3.00	5.58	16.74	0.2	0.16	0.03	1.69
2019FTD014E	200.13	209.77	9.64	2.49	24.00	0.29	0.52	0.04	9.90
<i>including</i>	202.60	203.90	1.30	10.73	13.94	0.79	0.79	0.13	27.52
<i>and</i>	208.30	209.77	1.47	4.62	6.80	1.1	2.2	0.07	29.43
<i>including</i>	208.30	208.60	0.30	16.65	5.00	4.28	8.74	0.25	106.00
2019FTD015E	241.90	244.25	2.35	1.46	3.43	0.21	0.55	0.09	7.23
<i>including</i>	242.35	242.55	0.20	13.50	2.70	2.26	4.37	0.74	53.4
FAT046	0.00	19.30	19.30	1.91	36.92	0.01	0.03	0.02	3.76
<i>including</i>	0.00	3.10	3.10	4.19	12.99	0.02	0.05	0.01	5.09
<i>and</i>	4.90	15.70	10.80	2.00	21.55	0.004	0.03	0.03	4.23
FAT049	4.90	12.10	7.20	0.80	5.78	0.01	0.09	0.07	1.65
FT-2023-001	159.75	161.00	1.25	3.52	4.40	0.04	1.77	0.00	31.72
<i>including</i>	159.75	160.50	0.75	5.33	4.00	0.05	2.65	0.00	46.70
FT-2026-001	222.75	224.10	1.35	1.06	1.43	0.19	0.49	0.19	6.99
FT-2026-001	259.75	262.03	2.28	0.75	1.70	0.39	0.12	0.07	2.31
<i>including</i>	259.75	260.07	0.32	2.14	0.68	2.64	0.39	0.02	8
FT-2026-002	124.7	148.50	23.8	0.40	9.52	0.05	0.09	0.09	2.87
<i>including</i>	124.70	130.10	5.40	0.8	4.32	0.12	0.01	0.19	2.75
<i>including</i>	129.50	130.10	0.60	3.81	2.29	0.15	0.02	0.07	3.42
FTD001	48.00	62.00	14.00	1.69	23.60	IA	NA	0.00	NA
<i>including</i>	48.00	56.00	8.00	2.29	18.31	0.19	NA	0.07	NA
FTD002	75.00	84.00	9.00	1.35	12.15	IA	IA	IA	NA
<i>including</i>	76.00	81.00	5.00	2.22	11.08	0.09	IA	0.00	NA
FTD003	104.00	114.00	10.00	0.61	6.13	IA	NA	IA	NA
<i>including</i>	104.00	107.00	3.00	1.80	5.39	IA	NA	IA	NA
FTD004	140.00	145.00	5.00	1.90	9.50	0.21	NA	0.04	NA
<i>including</i>	140.00	145.00	5.00	1.90	9.50	0.21	NA	0.04	NA
FTD005	38.00	67.00	29.00	2.08	60.33	0.09	0.12	0.03	4.10
<i>including</i>	41.00	46.00	5.00	1.17	5.86	0.002	0.02	0.03	3.60
<i>and</i>	52.00	66.00	14.00	3.44	48.22	0.19	0.22	0.05	5.36
FTD006	32.00	58.00	26.00	1.40	36.38	IA	0.05	0.00	0.13
<i>including</i>	32.00	36.00	4.00	1.52	6.08	0.002	0.02	0.01	0.25
<i>and</i>	38.00	42.00	4.00	1.28	5.12	0.002	0.03	0.08	0.75
<i>and</i>	45.00	47.00	2.00	2.65	5.30	0.02	0.01	0.04	6.00
<i>and</i>	49.00	56.00	7.00	2.30	16.07	0.09	0.12	0.06	2.86
FTD007	65.00	80.00	15.00	0.85	12.69	IA	0.06	IA	3.33
<i>including</i>	70.00	74.00	4.00	1.34	5.34	0.07	0.05	0.02	4.5
<i>and</i>	76.00	79.00	3.00	1.45	4.34	0.02	0.04	0.01	4.33
FTD008	86.00	101.00	15.00	1.96	29.33	IA	0.06	IA	3.40

Hole ID	From (m)	To (m)	Interval (m)	Au g/t	Au gram-metres	WO ₃ %	Cu %	Co %	Ag g/t
<i>including</i>	88.00	89.00	1.00	10.80	10.80	0.49	0.05	0.05	20.00
<i>and</i>	92.00	95.00	3.00	5.48	16.43	0.53	0.05	0.15	4.33
FTD009	54.00	61.00	7.00	0.78	5.49	NA	0.02	NA	2.29
<i>including</i>	59.00	60.00	1.00	3.00	3.00	NA	0.05	NA	8.00
FTD013	20.00	47.00	27.00	2.25	60.81	0.13	0.14	0.09	4.33
<i>including</i>	21.00	27.50	6.50	2.44	15.84	0.01	0.02	0.06	5.23
<i>and</i>	32.00	43.00	11.00	3.40	37.37	0.22	0.23	0.14	5.64
<i>and</i>	45.00	47.00	2.00	2.06	4.11	0.3	0.32	0.11	3.50
FTD014	1.00	20.00	19.00	1.68	31.91	0.08	0.02	0.02	2.53
<i>including</i>	1.00	6.00	5.00	2.89	14.45	0.11	0.01	0.01	3.80
<i>including</i>	8.00	12.00	4.00	2.52	10.09	0.11	0.03	0.03	5.00
FTD015	1.00	11.00	10.00	1.96	19.62	0.02	0.02	0.02	4.50
FTD016	5.00	32.00	27.00	0.62	16.74	0.03	0.03	0.03	1.78
<i>including</i>	25.00	27.00	2.00	1.84	3.68	0.02	0.1	0.05	3.00
FTD017	5.00	25.25	20.25	1.07	21.67	0.03	0.05	0.02	3.48
<i>including</i>	13.00	24.00	11.00	1.57	17.28	0.05	0.06	0.02	4.36
FTD018	0.00	7.20	7.20	1.21	8.73	0.02	0.01	0.02	3.22
<i>including</i>	0.00	4.00	4.00	1.71	6.84	0.01	0.01	0.03	5.00
FTD022	81.00	93.00	12.00	3.95	47.37	0.13	0.04	0.07	6.42
<i>including</i>	82.00	84.00	2.00	3.31	6.61	0.06	0.02	0.17	7.00
<i>and</i>	86.00	93.00	7.00	5.55	38.83	0.16	0.06	0.05	7.86
FTD024	0.00	41.00	41.00	1.10	45.06	0.01	0.03	0.03	4.71
<i>including</i>	0.00	1.00	1.00	11.40	11.40	0.01	0.01	0.02	20.00
<i>and</i>	26.00	28.00	2.00	2.73	5.45	0.01	0.004	0.01	9.00
<i>and</i>	31.00	34.00	3.00	2.18	6.54	0.03	0.09	0.02	8.50
<i>and</i>	35.80	38.50	2.70	1.88	5.07	0.06	0.06	0.07	10.22
FTD025	0.00	51.00	51.00	1.18	60.24	0.02	0.06	0.05	4.02
<i>including</i>	0.00	4.00	4.00	4.52	18.08	0.004	0.02	0.01	7.00
<i>and</i>	7.00	10.00	3.00	1.79	5.38	0.01	0.08	0.02	4.00
<i>and</i>	42.00	48.00	6.00	2.94	17.63	0.08	0.09	0.02	7.67
FTD026	45.00	62.00	17.00	1.86	31.69	0.07	0.13	0.05	7.13
<i>including</i>	46.00	50.00	4.00	1.96	7.83	0.04	0.08	0.06	5.50
<i>and</i>	52.00	53.00	1.00	5.68	5.68	0.48	0.06	0.22	12.00
<i>and</i>	55.00	56.00	1.00	3.45	3.45	0.12	0.15	0.02	9.00
<i>and</i>	57.60	59.00	1.40	7.98	11.17	0.13	0.22	0.12	24.57
FTD031	9.00	23.00	14.00	0.39	5.42	0.02	0.08	0.05	1.49
FTD041	180.00	182.00	2.00	0.72	1.44	0.05	0.12	0.03	1.32
FTD042	185.00	187.00	2.00	0.87	1.74	0.005	0.08	0.02	1.64
<i>including</i>	186.00	187.00	1.00	1.20	1.20	0.004	0.09	0.02	1.83
GP-90-01	0.30	24.00	23.70	1.61	38.23	0.06	0.06	0.01	5.54
<i>including</i>	0.30	8.00	7.70	2.11	16.23	0.14	0.05	0.02	7.63
<i>and</i>	10.00	13.00	3.00	1.87	5.62	0.01	0.06	0.01	5.33
<i>and</i>	16.00	24.00	8.00	1.63	13.04	0.02	0.06	BDL	1.63

Hole ID	From (m)	To (m)	Interval (m)	Au g/t	Au gram-metres	WO ₃ %	Cu %	Co %	Ag g/t
GP-90-02	3.00	25.80	22.80	0.58	13.20	0.04	0.03	0.03	4.83
<i>including</i>	10.00	12.00	2.00	2.41	4.81	0.04	0.02	0.02	3.50
GP-90-05	20.00	30.20	10.20	0.91	9.24	0.03	0.06	0.04	2.60
<i>including</i>	20.00	22.00	2.00	1.86	3.71	0.08	0.03	0.16	4.00
<i>and</i>	24.00	26.00	2.00	1.30	2.60	0.03	0.13	0.01	3.50

Notes (Table 4): Reported grades are calculated as down-hole length weighted averages. Intercept interval lengths are downhole lengths – true width not known. Au gram-metres = (Au g/t) x (Interval m), IA = Incompletely Assayed over interval length, NA = Not Assayed.

Table 5: Firetower F90 Zone Drilling Significant Intercepts (Previous and Current Drilling)

Hole ID	From (m)	To (m)	Interval (m)	Au g/t	Au gram-metres	WO ₃ %	Cu %	Co %	Ag g/t
2019FTD003	78.00	107.00	29.00	0.79	22.79	0.05	0.01	0.05	1.23
<i>including</i>	89.00	96.10	7.10	2.19	15.57	0.09	0.02	0.04	2.41
2019FTD004	53.00	61.00	8.00	0.39	3.10	0.03	0.001	0.02	0.54
2019FTD004	81.00	86.00	5.00	8.72	43.58	0.06	0.01	0.07	13.19
<i>including</i>	81.00	83.00	2.00	21.23	42.46	0.14	0.03	0.16	31.77
2019FTD004	111.90	125.10	13.20	0.72	9.50	0.08	0.13	0.08	3.44
2019FTD005	93.00	98.00	5.00	0.66	3.28	0.05	0.1	0.03	1.87
2019FTD006	55.00	70.00	15.00	0.74	11.17	0.02	0.03	0.04	1.47
<i>including</i>	66.00	67.00	1.00	4.37	4.37	0.01	0.02	0.04	5.18
2019FTD007	88.00	93.00	5.00	1.12	5.58	0.01	0.04	0.04	3.46
<i>including</i>	90.50	91.00	0.50	6.36	3.18	0.002	0.06	0.08	10.37
2019FTD011	25.00	38.00	13.00	0.60	7.79	0.001	0.02	0.01	2.01
2019FTD012	76.00	101.00	25.00	1.25	31.23	0.12	0.06	0.04	2.29
<i>including</i>	78.00	80.00	2.00	2.41	4.81	0.58	0.18	0.17	10.44
<i>and</i>	82.00	83.00	1.00	3.66	3.66	0.05	0.1	0.09	2.46
<i>and</i>	85.00	93.00	8.00	2.15	17.22	0.21	0.06	0.04	2.38
2019FTD015E	158.50	171.00	12.50	0.55	6.88	0.11	0.09	0.10	4.2
<i>including</i>	167.30	169.20	1.90	2.02	3.84	0.56	0.11	0.12	7.86
FT-2023-001	68.40	85.00	16.60	0.57	9.49	0.05	0.13	0.03	3.35
FT-2026-002	99.75	116.15	16.40	0.65	10.64	0.07	0.04	0.04	2.46
FTD002	57.00	60.00	3.00	1.21	3.62	IA	IA	NA	NA
FTD003	47.00	58.00	11.00	0.58	6.39	NA	NA	NA	NA
<i>including</i>	57.00	58.00	1.00	3.23	3.23	NA	NA	NA	NA
FTD003	65.00	76.00	11.00	1.91	21.01	IA	NA	IA	NA
<i>including</i>	74.00	76.00	2.00	7.69	15.38	0.01	NA	0.19	NA
FTD004	44.00	59.00	15.00	1.12	16.73	0.01	0.001	0.02	NA
<i>including</i>	44.00	46.00	2.00	3.00	5.99	0.08	BDL	0.03	NA
<i>and</i>	48.00	51.00	3.00	2.11	6.34	0.001	BDL	0.00	NA
<i>and</i>	53.00	54.00	1.00	2.08	2.08	0.02	BDL	0.02	NA

Hole ID	From (m)	To (m)	Interval (m)	Au g/t	Au gram-metres	WO ₃ %	Cu %	Co %	Ag g/t
FTD005	38.00	67.00	29.00	2.08	60.33	0.09	0.12	0.03	4.10
<i>including</i>	41.00	46.00	5.00	1.17	5.86	0.002	0.02	0.03	3.50
<i>and</i>	52.00	66.00	14.00	3.44	48.22	0.19	0.22	0.05	5.36
FTD007	37.00	49.00	12.00	1.19	14.24	0.01	0.05	0.02	2.50
<i>including</i>	37.00	44.00	7.00	1.72	12.03	0.002	0.04	0.02	2.56
FTD008	34.00	50.00	16.00	0.55	8.74	NA	0.003	NA	0.63
<i>including</i>	43.00	45.00	2.00	1.86	3.72	NA	0.003	NA	1.50
FTD011	27.00	65.00	38.00	0.71	26.92	IA	0.06	IA	1.63
<i>including</i>	41.00	42.00	1.00	1.20	1.20	0.12	0.024	0.22	2.00
<i>including</i>	44.00	45.00	1.00	1.35	1.35	0.22	0.272	0.19	6.00
<i>including</i>	48.00	54.00	6.00	1.38	8.26	0.02	0.02	0.15	2.17
<i>including</i>	64.00	65.00	1.00	1.21	1.21	0.33	0.345	0.34	2.00
FTD019	97.00	107.00	10.00	0.91	9.08	0.07	0.26	0.10	4.50
<i>including</i>	97.00	100.00	3.00	2.40	7.21	0.17	0.59	0.21	9.67
FTD023	0.90	12.00	11.10	5.68	63.00	0.05	0.04	0.08	5.31
FTD027	0.70	52.00	51.30	0.75	38.52	0.01	0.01	0.04	1.77
<i>including</i>	0.70	6.00	5.30	1.60	8.47	0.01	0.04	0.02	3.57
<i>including</i>	28.00	33.00	5.00	2.04	10.22	0.004	0.003	0.04	3.98
<i>including</i>	35.00	36.00	1.00	3.11	3.11	0.01	0.01	0.03	4.00
FTD028	39.00	70.00	31.00	0.66	20.52	0.05	0.03	0.04	2.10
<i>including</i>	63.00	67.00	4.00	2.59	10.34	0.3	0.19	0.25	7.50
FTD029	43.00	74.20	31.20	1.60	49.83	0.04	0.02	0.03	1.39
<i>including</i>	43.00	50.00	7.00	2.30	16.07	0.003	0.01	0.01	1.71
<i>and</i>	56.00	59.00	3.00	3.72	11.15	0.39	0.06	0.12	8.67
<i>and</i>	73.00	74.20	1.20	14.32	17.18	0.004	0.02	0.04	2.00
FTD030	59.00	79.00	20.00	0.34	6.74	0.03	0.02	0.04	0.45
<i>including</i>	60.00	61.00	1.00	1.10	1.10	0.21	0.04	0.08	2.00
FTD041	219.10	226.00	6.90	0.80	5.55	0.41	0.1	0.26	2.94
<i>including</i>	221.10	221.80	0.70	3.59	2.51	2.24	0.05	0.92	4.62
GP-90-03	1.00	24.60	23.60	1.61	38.09	0.02	0.01	0.03	IC
<i>including</i>	3.00	8.00	5.00	2.83	14.14	0.01	0.01	0.02	7.40
<i>and</i>	12.00	15.00	3.00	5.23	15.70	0.01	0.01	0.04	NA
GP-90-06	21.00	29.00	8.00	0.91	7.27	0.01	0.01	NA	1.25
<i>including</i>	25.00	28.00	3.00	1.38	4.14	0.01	0.003	NA	2.00
GP-90-07	2.00	12.00	10.00	1.46	14.56	0.02	0.02	0.01	2.90
<i>including</i>	2.00	8.00	6.00	1.97	11.83	0.03	0.02	0.00	3.83
GP-90-10	7.00	24.00	17.00	4.06	69.02	0.21	0.11	0.04	6.70
<i>including</i>	7.00	13.00	6.00	9.27	55.62	0.59	0.26	0.08	10.33
<i>including</i>	10.00	13.00	3.00	17.20	51.60	1.10	0.47	0.02	18.67
GP-90-16	28.00	30.75	2.75	2.19	6.02	NA	0.13	NA	6.18

Notes (Table 5): Reported grades are calculated as down-hole length weighted averages. Intercept interval lengths are downhole lengths – true width not known. Au gram-metres = (Au g/t) x (Interval m), IA = Incompletely Assayed over interval length, NA = Not Assayed.

About Flynn Gold Limited

Flynn Gold is an Australian mineral exploration company with a portfolio of projects in Tasmania (see Figure 5) The Company has ten 100% owned tenements located in northeast Tasmania which are highly prospective for gold as well as tin and tungsten.

The Company also has the Henty silver-lead-zinc project on Tasmania's mineral-rich west coast and the Firetower tungsten, gold and critical metals project located in northern Tasmania.

For further information regarding Flynn Gold please visit the ASX platform (ASX: FG1) or the Company's website www.flynnngold.com.au.

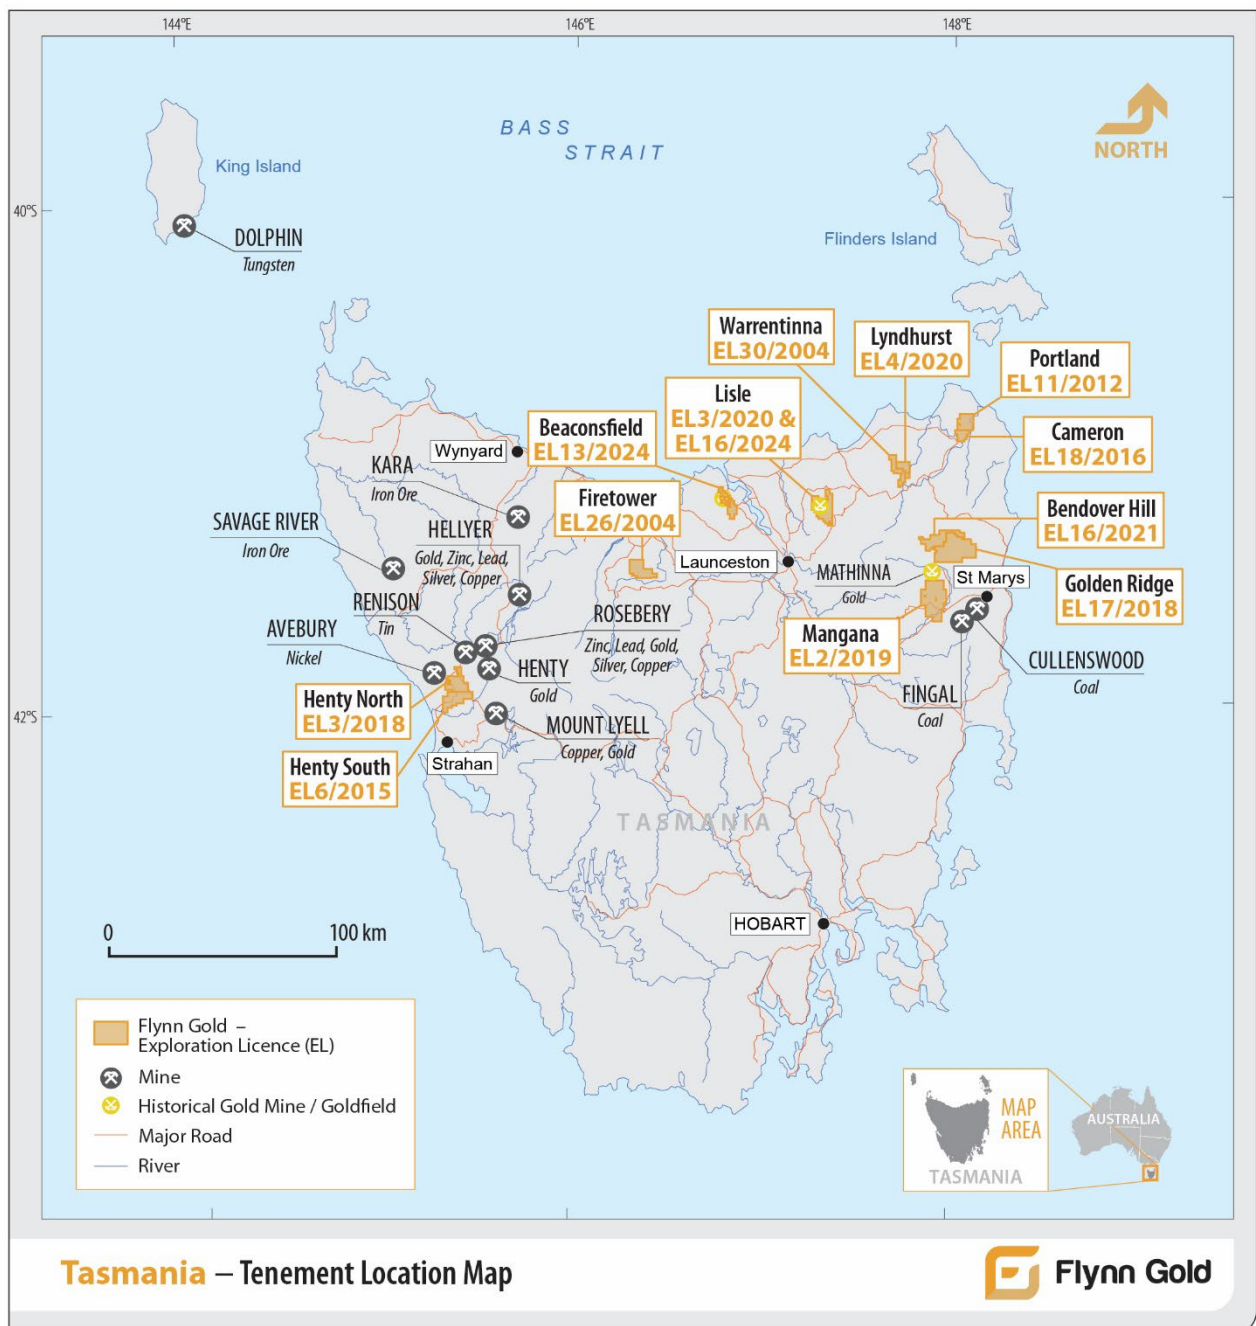


Figure 5 – Location of Flynn Gold tenements in Tasmania

In accordance with Listing Rule 5.23.2, the Company confirms in this subsequent public report that it is not aware of any new information or data that materially affects the information included in any previous market announcements.

Competent Person Statement

The information in this ASX Announcement that relates to Exploration Results, including historical Exploration Results, is based on information compiled and reviewed by Mr Sean Westbrook, a Competent Person who is a Member of the Australian Institute of Geoscientists. Mr Westbrook is a consultant to Flynn Gold and is a shareholder in Flynn Gold. Mr Westbrook has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the *Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves*. Mr Westbrook consents to the inclusion in this announcement of the matters based on his information in the form and context in which they appear.

Forward Looking and Cautionary Statements

Some statements in this announcement regarding estimates or future events are forward-looking statements. They include indications of, and guidance on, future earnings, cash flow, costs and financial performance. Forward-looking statements include, but are not limited to, statements preceded by words such as “planned”, “expected”, “projected”, “estimated”, “may”, “scheduled”, “intends”, “anticipates”, “believes”, “potential”, “predict”, “foresee”, “proposed”, “aim”, “target”, “opportunity”, “could”, “nominal”, “conceptual” and similar expressions. Forward-looking statements, opinions and estimates included in this report are based on assumptions and contingencies which are subject to change without notice, as are statements about market and industry trends, which are based on interpretations of current market conditions. Forward-looking statements are provided as a general guide only and should not be relied on as a guarantee of future performance. Forward-looking statements may be affected by a range of variables that could cause actual results to differ from estimated or anticipated results and may cause the Company’s actual performance and financial results in future periods to materially differ from any projections of future performance or results expressed or implied by such forward-looking statements. So, there can be no assurance that actual outcomes will not materially differ from these forward-looking statements.

References

FG1: ASX Announcement dated 27 October 2023
FG1: ASX Announcement dated 22 January 2024
FG1: ASX Announcement dated 26 March 2024
FG1: ASX Announcement dated 19 February 2025
FG1: ASX Announcement dated 01 October 2025
FG1: ASX Announcement dated 30 October 2025
FG1: ASX Announcement dated 24 March 2026
FG1: ASX Announcement dated 01 June 2026
FG1: ASX Announcement dated 15 July 2026
FG1: ASX Announcement dated 16 July 2026

JORC Code Table 1 for Exploration Results – Firetower Project

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i>	Sampling described in this report relates to new extension drilling of diamond drill hole 2019FTD003E (E = extended) and new drill hole FT-2026-002. References to previous diamond drilling results relate to previously reported data, with corresponding FG1 ASX announcements cited in the report body.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	Diamond core was sampled to geological boundaries with sample lengths generally between 0.3m and 1.0m. Samples are considered representative of the mineralised intervals. All samples were collected by qualified geologists or under geological supervision.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report.</i>	The mineralisation referenced in this announcement comprises discrete high-grade intervals within broader, lower-grade zones.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i>	Drilling was completed using triple tube diamond core methods (NQ size for 2019FTD003E and HQ for FT-2026-002) and a standard 3m triple tube core barrel. The core was oriented using a Boart Longyear Truecore UPIX tool.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	Length based core recovery was measured from reassembled core for every drill run. Data was recorded into a digital RQD spreadsheet which was then uploaded to Flynn Gold's SQL database.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	Triple tube diamond core drilling techniques are used. The core recovery is logged for each run of drilling and measured against the drilled length.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No relationship has been noticed between sample recovery and grade.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Logging is considered sufficient to support geological interpretation and future Mineral Resource estimation studies.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	Logging is qualitative and supported by core photography.

Criteria	JORC Code explanation	Commentary
	<i>The total length and percentage of the relevant intersections logged.</i>	All relevant drill core was logged in full.
Subsampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Core was cut using a core saw and half-core samples collected for 2019FTD003E and quarter-core for FT-2026-002
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	No non-core drilling samples taken.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	The sample preparation technique is considered appropriate for the style of mineralisation and sample type.
	<i>Quality control procedures adopted for all subsampling stages to maximise representivity of samples.</i>	Sub-sampling, sample preparation and quality control followed industry standard procedures.
	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Half-core/quarter-core sampling is considered appropriate for the style of mineralisation and is standard industry practice for diamond drilling programs of this nature. Sampling representivity is maximised by always taking the same side of the drill core (whenever orientated) and consistently drawing a cut line on the core where orientation is not possible. All competent core was cut with an automated core saw. Fragmented or broken core was cut using a hand operated saw to minimise sample loss and maintain representative sampling. Sampling intervals ranged from 0.3m to 1.0m. Intervals shorter than 1.0m were used where discrete geological features – such as large sulphide veins, faults, or lithological boundaries – were present. The sample sizes are considered appropriate for the nature of mineralisation. Coarse rejects and lab-splits of mineralized zones are retained for potential further QAQC analysis, including check assaying at an independent laboratory.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample sizes are considered appropriate for the style of mineralisation.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Samples were analysed at accredited ALS laboratories for Au by fire assay (AU-AA26) and for multi-elements using a four-acid digest with ICP-MS finish (ME-MS61). XRF15b (lithium borate fusion) was used to assay for W, Sn, Mo and over-range Cu. Four-acid digestion is considered near-total for most base and pathfinder elements but may under-recover elements such as tungsten and tin where they are hosted in resistant mineral phases. The XRF15b method provides total digestion suitable for tungsten-bearing minerals. QA/QC included insertion of certified reference materials and blanks at regular intervals. Results demonstrate acceptable accuracy and precision.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No geophysical tools were used to determine any element concentrations.

Criteria	JORC Code explanation	Commentary
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	QA/QC included insertion of certified reference materials, blanks, and duplicate assays at regular intervals in accordance with industry standard practices. Results demonstrate acceptable accuracy and precision.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Significant intersections have been reviewed by company personnel and the Competent Person.
	<i>The use of twinned holes.</i>	No twinned drill holes have been completed.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Assay data was received directly from the laboratory and stored in a validated electronic database. Original laboratory certificates are stored separately as pdf files.
	<i>Discuss any adjustment to assay data.</i>	No adjustments have been made other than conversion of W to WO ₃ and length-weighted averaging.
Location of data points	<i>Accuracy and quality of surveys used to locate drillholes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	The reported drill collar locations were surveyed using a handheld Garmin 64ST GPS (accuracy +/- 5m). Downhole surveys were completed using electronic survey tools at regular intervals, generally every 30m or less.
	<i>Specification of the grid system used.</i>	Grid system used is MGA94 Zone 55.
	<i>Quality and adequacy of topographic control.</i>	Survey accuracy is considered adequate for exploration reporting.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	The reporting of new Exploration Results in this announcement refers to two drill holes (2016FTD003E and FT-2026-002). Spacing to nearby previous drillholes is in the order of 15 to 50m and is considered appropriate for the stage of exploration and assessment.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	No Mineral Resource or Ore Reserve estimates are reported in this announcement. Current data spacing (new and previous drilling) is considered sufficient to demonstrate the presence and continuity of mineralisation. The completed 2026 drill program was designed to provide infill and expansion drilling in order to support future mineral resource studies.
	<i>Whether sample compositing has been applied.</i>	No compositing has been applied.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Mineralisation is interpreted to be steeply dipping. Drill hole orientations are considered appropriate for initial testing.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	No sampling bias is currently identified.

Criteria	JORC Code explanation	Commentary
Sample security	<i>The measures taken to ensure sample security.</i>	Samples were transported direct to assay laboratories by Flynn Gold staff under chain-of-custody procedures. Sample receipt and verification were completed by the laboratory. Sample tracking is recorded digitally.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	No independent audits or reviews have been completed. Internal review and data verification is carried out by the Competent Person. No material issues have been identified.

Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The Firetower Project is located within EL26/2004, an exploration licence held by a wholly owned subsidiary of Flynn Gold Limited.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	Flynn Gold is not aware of any impediments to exploration.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	The project has been explored since the 1970s, including mapping, geochemistry, geophysics and drilling. A total of 131 drill holes (~10,215m) have been completed in previous exploration campaigns. Historical programs did not consistently assay tungsten, cobalt or copper. Flynn Gold have subsequently carried out re-sampling of historical drill core and re-assaying for these elements.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The Firetower Project lies in the central north of Tasmania within equivalents of the Mt Read Volcanics. Mineralisation comprises polymetallic Au-Co-W-Cu hosted in altered volcanoclastic rocks. Mineralisation occurs as veins, breccias and replacements with associated sulphides. The system may be intrusive-related but remains under investigation.
Drillhole information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i> • easting and northing of the drillhole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar • dip and azimuth of the hole • downhole length and intersection depth • hole length.	Relevant drill hole collar details and intercepts for new exploration results (this announcement) are reported in Tables 1 and 3. Relevant drill hole collar details and intercepts for previous (Flynn Gold) and historical drillholes are reported in Tables 2, 4 and 5.

Criteria	JORC Code explanation	Commentary
	<i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	Information provided is considered sufficient for understanding the reported results.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	Drill intercepts are reported as downhole length-weighted averages. A cut-off of 0.3 g/t Au has been applied. Internal dilution of up to 5m has been allowed where geological reasonable. No top-cutting has been applied, and no metal equivalents are reported.
	<i>Where aggregate intersections incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i>	Short intercepts of high-grade results that have a material impact on overall intervals are reported as separate ("including") intercepts.
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	No metal equivalent values reported.
Relationship between mineralisation widths and intersection lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i>	Downhole lengths are reported. True widths are not established but are estimated to be approximately 75–95% of reported intervals.
	<i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i>	The precise relationship between drill hole orientation and vein geometry has not been fully assessed at this stage of exploration. The current drilling program is designed to assist understanding of the geometry and structural controls of the mineralisation, including vein orientation and true thickness.
	<i>If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g. "downhole length, true width not known").</i>	Intervals are reported as downhole length. True width is not yet determined.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intersections should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Appropriate maps, sections and drill hole location plans are included to support interpretation of results. The diagrams are considered sufficient to illustrate the location of historical drilling and the proposed current drilling program.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	The Competent Person considers the results to be reported in a practical and balanced manner, including both high- and lower-grade intercepts.

Criteria	JORC Code explanation	Commentary
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	Previous exploration includes geophysics, geochemistry and drilling. A mineralised trend of approximately 6km strike has been identified. No bulk sampling or metallurgical testwork has been completed.
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	Planned further work includes metallurgical and mineral resource studies. A compilation and review of previous geophysical survey data is in progress.
	<i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Maps have been included in the main body of this announcement.